+GF+ SIGNET 8450 Pressure Transmitters



Description

The +GF+ SIGNET 8450 Pressure Transmitter is a unique instrument that converts the signal from the +GF+ SIGNET 2450 pressure sensor into a 4 to 20 mA output for long distance transmission. State-of-the-art electronic design offers a single-point calibration. Configuration flexibility is maximized with optional relays for process control, packaging options for integral/pipe mount or panel installation and dual input/output capability.

Technical Features

Mounting Version	Part No.	Wire Power	Sensor Input	4 to 20 mA Output	Open Collector∕ Relay
Field	3-8450-1	2	1	1	1 O.C. Hi, Lo or Off
	3-8450-2	4	1	1	2 Relays Hi, Lo or Off
	3-8450-3	4	2	2 Sensor 1, Sensor 2 or delta P	2 O.C.'s Hi, Lo or Off
Panel	3-8450-1P	2	1	1	1 O.C. Hi, Lo or Off
	3-8450-2P	4	1	1	2 Relays Hi, Lo or Off
	3-8450-3P	4	2	2 Sensor 1, Sensor 2 or delta P	2 O.C.'s Hi, Lo or Off


Features

- S³L input
- psi, Bar, or kPa display
- Integral or remote mounting
- Single point calibration
- Dual input/output option
- Output simulation function for complete system testing
- Relay option
- Output scalability
- NEMA 4X/IP65
- Splashproof enclosure
- 2 x 16 character dot matrix LCD
- Chemical resistant enclosure and selfhealing window
- Large pushbuttons

Application

- Pump, filter or pipe protection
- Pressure regulation/ monitoring
- Over or under pressure alarm
- Pump servicing
- HVAC systems
- Chemical processing
- Scrubbers
- Marine
- Water management
- Irrigation systems
- Waste water

Dimensions

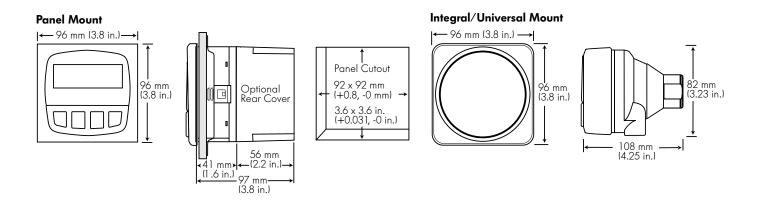

Installation

The transmitter is available in a panel mount or a field version. Select either the universal mount kit (3-8050) to mount the transmitter on a surface near the sensor or select the integral mount kit (3-8052) to mount the transmitter onto the sensor.

1. Panel Mount


3-8450-XP



All panel mount transmitters (3-8450-XP) include everything for panel installation. Panel mount transmitters fit into a standard 1/4 DIN panel cutout.


2. Universal Mount

3-8450-X Transmitter





The Universal Mount Kit (3-8050) includes a conduit base, locking ring, and universal adapter for mounting the transmitter on a pipe, wall, or other stationary surface.


3. Integral Mount




The Integral Mount Kit (3-8052) includes a conduit base, locking ring, and integral adapter for mounting the transmitter and sensor directly into a pipe.








Rear Terminal View



Terminal 8450-1





Output 2+

Output 1-

Output 1+

Sensr Gnd (WHITE)

Sensr IN (RED)

Sensr V+ (BLACK)

Terminal 8450-3

Technical Data

General

- Compatibility: +GF+ SIGNET 2450 Pressure Sensor (S³L input) Accuracy: $\pm 1\%$ of full scale Repeatability: $\pm 0.5\%$ of full scale Enclosure:
- Rating: NEMA 4X/IP65 front •
- Case: PBT •
- Panel case gasket: Neoprene
- Window: Polyurethane coated • polycarbonate
- Keypad: Sealed 4-key • silicone rubber

Display:

- Alphanumeric 2 x 16 LCD ٠
- Update rate: 1 second •
- Contrast: User selected, 5 levels Shipping Weight: 0.325 kg (0.8 lbs.)

Environmental


Operating temperature: -10 to 70°C (14 to 158°F) Storage temperature: -15 to 80°C (5 to 176°F) Relative humidity:

0 to 95%, non-condensing

Standards and Approvals

- CE, UL listed
- Manufactured under ISO 9001 and • ISO 14001

10 Ο 0 9 С System Pw Loop -0 8 4 System Pw Loop + 0 3 7 Ο AUX $\overline{0}$ \overline{O} 2 6 AUX 5 O \cap





Terminal 8450-2

Note: The terminal blocks are not labeled on the back of the unit. An adhesive label is supplied with terminal descriptions to serve as a remote terminal display.

Electrical

Power:

 12 to 24 VDC ±10% regulated (-1) 21 mA max.: (-2) 220 mA max.: (-3) 60mA max.

Sensor Input:

- Range: 0 to 250 psig, 0 to 17 bar, 0 to 1700 kPa
- Current output:
- 4 to 20 mA, isolated, fully adjustable and reversible
- Max loop impedance: 50**Ω** max. @ 12 V 325**Ω** max. @ 18 V 600Ω max. @ 24V
- Update rate: 100 ms
- Accuracy: ±0.03 mA
- Relav output:
- Mechanical SPDT contacts: Hi, Lo, Off
- Maximum voltage rating: 5 A @ 30 VDC, 5 A @ 250 VAC resistive load
- Hysteresis: User adjustable •
- Open-collector output: Hi, Lo, Off
- Open-collector, optically isolated, 50 mA max, sink, 30 VDC max. pull-up voltage.
- Hysteresis: User adjustable

Ordering Information

л

Mfr. Part No.	Code	Description	
3-8450-1	159 000 041	Pressure transmitter, Field mount	
3-8450-1P	159 000 042	Pressure transmitter, Panel mount	
3-8450-2	159 000 043	Pressure transmitter, Field mount with relays	
3-8450-2P	159 000 044	Pressure transmitter, Panel mount with relays	
3-8450-3	159 000 045	Pressure transmitter, Field mount with dual input/output	
3-8450-3P	159 000 046	Pressure transmitter, Panel mount with dual input/output	

Accessories		
Mfr. Part No.	Code	Description
3-8050	159 000 184	Universal mounting kit
3-8050.395	159 000 186	Transmitter NEMA 4X cover
3-8052	159 000 188	3/4 in. Integral mounting kit
3-8052-1	159 000 755	3/4 in. NPT mount junction box
3-8050.396	159 000 617	RC Filter kit (for relay use)
3-0000.596	159 000 641	Heavy duty wall mount bracket
3-5000.598	198 840 225	Surface Mount Bracket
3-9000.392	159 000 368	Liquid tight connector kit for rear cover (includes 3 connectors)
3-9000.392-1	159 000 839	Liquid tight connector kit, NPT (1 piece)
3-9000.392-2	159 000 841	Liquid tight connector kit, PG13.5 (1 piece)

Engineering Specifications

- The transmitter shall be UL and CE listed.
- The transmitter shall be manufactured under ISO 9001 and ISO 14001 certified processes.
- The transmitter shall be field or panel mountable.
- The pressure shall be displayed in bar, psi, or kPa
- The display units shall be fully scaleable.
- The device shall meet NEMA 4X and IP65 standards.
- The operating voltage shall be 12 to 24 VDC.
- The transmitter shall have a 4 to 20 mA output with an open collector output, 5 to 30 VDC or a 4 to 20 mA output with dual open collector with delta capability.
- The transmitter shall have simulate capability.
- The transmitter shall be +GF+ SIGNET 8450 Pressure Transmitter.