

# BenchMark® HDP

Portable Heavy Duty Bench Scale

## Specifications

### Load Cell, NTEP Certified:

IP67 aluminum, environmentally sealed

### Output Impedance:

350 ohm

### Maximum Overload:

200%

### Overload Protection:

Five-point, independently adjusted

### Scale Frame:

Mild steel powder coated black

### Scale Cover:

AISI304L, straight line finish, Ra=45 +/- 10

### Cable Length:

10 ft (3 m)

### Compensated Temperature Range:

14° F to 104° F (-10° C to 40° C)

### Warranty:

Two-year limited warranty

### Approvals:

NTEP CC 06-010, Class III 5,000 d

Measurement Canada AM-5625, Class III 5,000 d



*Ideal for aviation weighing. A complete system can be sold with the Tracer® AV2. Reference Aviation section for specifications.*

## Standard Features


- Mild steel base construction
- 304 stainless steel cover
- Indicator stand for mounting 480/482 Legend™ Series
- Wheel model
- Polyurethane rubber leveling feet with stainless steel stems
- 8 in diameter preformed rubber wheels with ball bearings
- Caster model
- 3 1/2 in diameter preformed rubber casters, two fixed, two swivel with lock

## APPROVALS





## Part Number/Price

Part #	Capacity	Platform Dimensions	Est. Weight	Price
<b>Wheel Model</b>				
97072	250 lb (125 kg)	24 x 24 x 8.75 in	275 lb	Consult
97073	500 lb (225 kg)	24 x 24 x 8.75 in	275 lb	Consult
<b>Caster Model</b>				
97074	250 lb (125 kg)	24 x 24 x 9.31 in	290 lb	Consult
97075	500 lb (225 kg)	24 x 24 x 9.31 in	290 lb	Consult

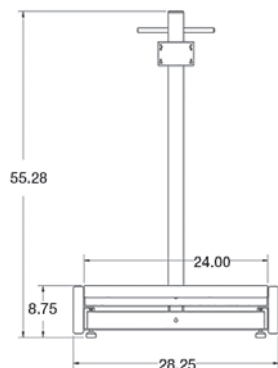

Wheel Model

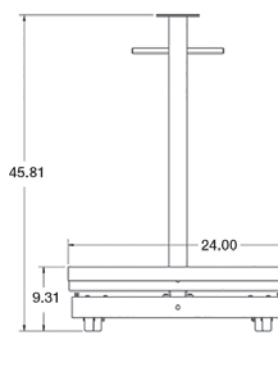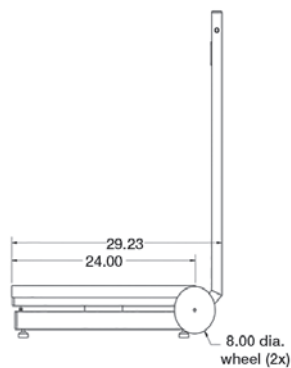

Caster Model

