

Models 6416 & 6417

Provides high safety level with new ground voltage indication feature

SPECIFICATIONS

MODELS	6416 & 6417			
ELECTRICAL				
Ground Resistance	Measurement Range	Resolution	Accuracy (% of Reading)	
Auto-Ranging 1 to 199Ω	0.010 to 0.099Ω	0.001Ω	±1.5% ±0.01Ω	
	0.10 to 0.99Ω	0.01Ω	±1.5% ±0.02Ω	
	1.0 to 49.9Ω	0.1Ω	±1.5% ±0.1Ω	
	50.0 to 99.5Ω	0.5Ω	±2% ±0.5Ω	
	100 to 199Ω	1Ω	±3% ±1Ω	
	200 to 395Ω	5Ω	±5% ±5Ω	
	400 to 590Ω	10Ω	±10% ±10Ω	
	600 to 1150Ω	50Ω	20% approx	
Current Measurement	0.200 to 0.999mA	1μA	±2% ±50μA	
	Auto-Ranging 1mA to 40A	1.000 to 2.990mA	10μA	±2% ±50μA
		3.00 to 9.99mA	100μA	±2% ±100μA
	10.00 to 29.90mA	1mA	±2% ±1mA	
	30.0 to 99.9mA	10mA	±2% ±10mA	
Selectable Measurement Frequency	50, 60, 128 or 2083Hz			
Current Measurement Frequency	47 to 800Hz			
Inductance Measurement	10 to 100μH; 100 to 500μH			
Current Overload	OL displayed above 39.99Arms			
Communication	Bluetooth connection (Model 6417 only)			
Power Source	4x1.5V LR6 (AA) Alkaline batteries or 4 NiMH batteries; Battery life: 12 hours, or 1440 30-second measurements approx.			



FEATURES

- Ground voltage indication (warns of possible unsafe conditions)
- Large multi-function bright yellow organic LED display (OLED)
- Selectable test frequency (improves accuracy in inductive environments)
- Clamping diameter of 35mm with large jaw design
- Storage of measurements (Ω and/or A, with time-stamping)
Model 6416: up to 300 measurements stored
Model 6417: up to 2000 measurements stored
- View stored measurements on the OLED display or via *Bluetooth* (Class 2 - communicates up to 30 ft) to a PC or the Android™ based mobile application (Model 6417)
- Auto Power OFF function
- Alarm function with adjustable set point and buzzer for quick field checks for volts, amps and ohms
- Rugged Lexan® head and body construction resists breakage
- Alarm settings and stored memory information saved during shutdown
- Includes DataView® software for data storage, real-time display, analysis, report generation and system configuration (Model 6417)
- Noise icon and buzzer alert user to presence of dangerous voltage and current levels
- Designed to EN 61010-1, 600V CAT IV safety standards

PRODUCT INCLUDES


Model 6416 includes a hard carrying case, calibration loop, four 1.5V AA batteries, ground workbook and user manual.

Model 6417 also includes a Bluetooth USB adapter, quick start guide, and a USB stick with DataView® software, ground workbook and user manual.



Models 6416 & 6417

Functional Displays

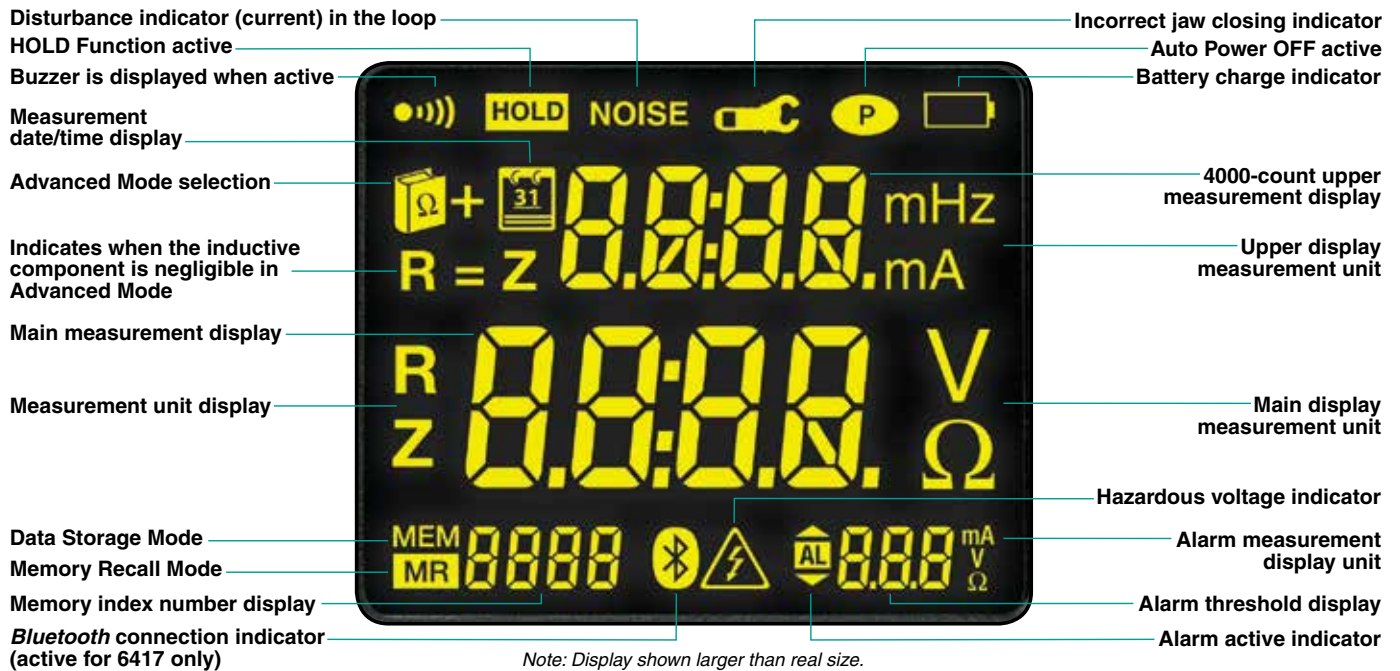

Measurement Results



Displays the leakage current and loop impedance at the test frequency

Memory Recall Mode



Measurement storage date-time screen

Alarm



Indicates voltage/current alarm threshold along with the direction of impedance

Ground Voltage



Indicates voltage potential at the point of measurement

Current Disturbance



Indicates that the current is greater than 10A

Impedance Over Range




Indicates that the impedance is greater than 1500Ω

CATALOG NO.	DESCRIPTION
2141.01	Ground Resistance Tester Model 6416 (Clamp-On, Alarm, Memory)
2141.02	Ground Resistance Tester Model 6417 (Clamp-On, Bluetooth, Alarm, Memory)



DataView®

Data Analysis and Reporting Software for Ground Testers

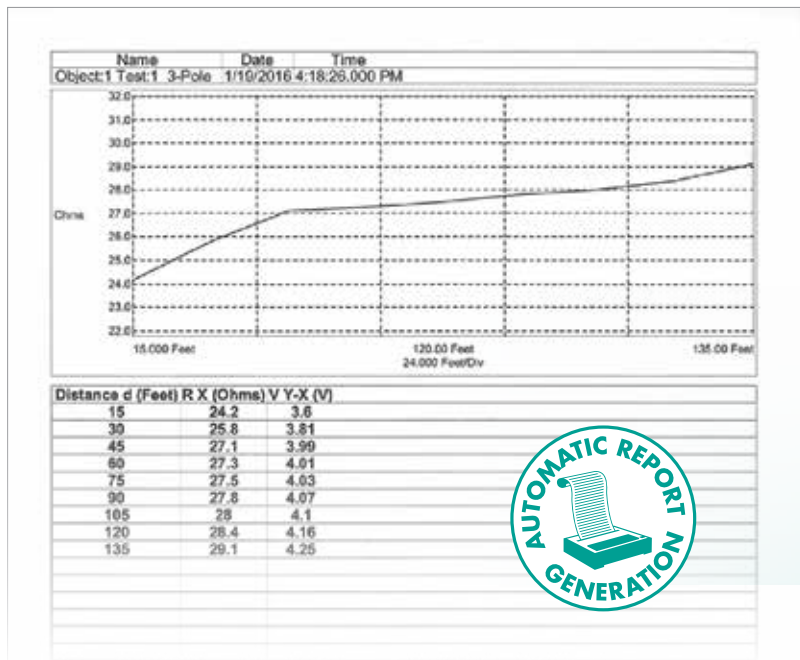

Configure all functions of the Models 6417, 6471 & 6472

- Run tests and analyze real-time data from your PC
- Configure all test functions and parameters from your PC
- Customize views, templates and reports to your exact needs
- Display Fall-of-Potential plots, tabular listings of test results, resistance vs. frequency plots, soil resistivity and bonding tests (Models 6471 & 6472)
- Print reports using standard or custom templates you design
- Free updates are available on our website www.aemc.com

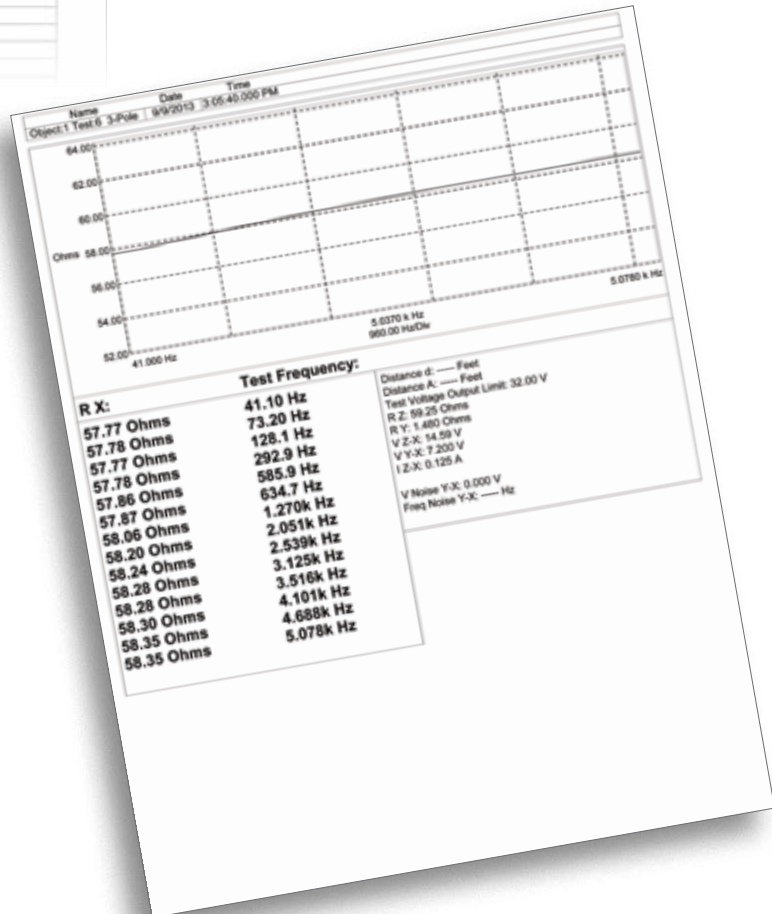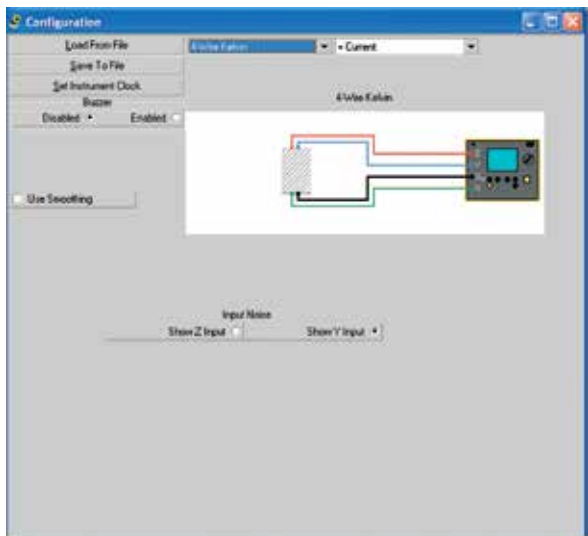

DataView® software provides a convenient way to configure and control ground resistance tests from your computer. Through the use of clear and easy-to-use tabbed dialog boxes, all ground tester functions can be configured and tests can be initiated. Results can be displayed in real-time and stored in your PC. Reports may be printed along with the operator's comments and analysis.