



APAQ-HCF

APAQ-HCFX



Cost-optimized Adjustable 2-wire Transmitter for Thermocouple Input

APAQ-HCF is an analog, multirange 2-wire temperature transmitter for in-head mounting in DIN B or larger connection heads.

APAQ-HCF covers 5 different thermocouple types, is continuously adjustable and provides a voltage linear output.

Designed for highest reliability and cost-efficiently manufactured, APAQ-HCF combines attractive pricing with high quality and industrial performance.

The Intrinsically Safe version, APAQ-HCFX, is available with ATEX and FM approval.

Multirange design

- Adjustable for thermocouple type J, L, T, K and N inputs with continuous range settings.
- Adjustments are made with solder pads and potentiometers.

Adjustments APAQ-HCF/-HCFX

Zero adjustment Adjustable ± 10 % of span

Span selection	mV	T/C J *	T/C L *	T/C T *	T/C K *	T/C N *
10 to 50		186 - 870°C	183 - 855°C	213 - >400°C	246 - 1232°C	319 - >1300°C
(no gap)		335 - 1566°F	329 - 1540°F	383 - >720°F	443 - 2218°F	574 - >2340°F

*The temperature spans correspond to the mV spans with zero adjustment = 0 % of span

Cold Junction Compensation

- Automatic compensation for the terminal temperature.

Easy mounting and access

- Flat design gives easy access to terminals and adjustments.
- Large center hole lets the lead wires or an insert tube pass easily.

Safety

- Genuine sensor break detection with selectable upscale or downscale action.
- Excellent EMC performance.

High load capacity

- Only 6.5 V voltage drop over the transmitter allows for high loads in the 4-20 mA output loop.

Industrial design

- The "Low Profile" housing, with its protected electronics, is extremely durable.

Cost-optimized

- High volumes combined with cost-effective design and production contributes to a very attractive pricing.

PO Box 9125, SE-200 39 Malmö, Sweden, **PHONE** +46 40 312560, **FAX** +46 40 312570, **E-MAIL** info@inor.se **WEB** www.inor.se

INOR PROCESS AB

INOR TRANSMITTER OY

PHONE +358 9 83850210, **FAX** +358 9 83850219, **E-MAIL** js.inor@surfeu.fi

INOR TRANSMITTER GmbH

PHONE +49 6181 582940, **FAX** +49 6181 582944, **E-MAIL** inor.gmbh@t-online.de

INOR TRANSMITTER Inc.

PHONE +1 262 884 4535, **FAX** +1 262 884 4537, **E-MAIL** service@inor.com

www.inor.com

Specifications : APAQ-HCF/-HCFX

Input

Thermocouples	Selectable, type J, L, T, K and N with ranges within -5 to +55 mV
Input impedance	>5 MΩ
Max. sensor wire resistance	500 Ω (total loop)

Monitoring

Sensor break detection, selectable	Upscale ~25 mA, downscale ~3 mA
------------------------------------	---------------------------------

Adjustments

Zero	±10 % of span
Span, selectable	10 to 50 mV
Span, fine adjustment	±10 %

Output

Current	4 - 20 mA
Linearity	Voltage linear
Current limitation	~ 25 mA
Permissible load	700 Ω @ 24 VDC, 25 mA
	620 Ω @ 24 VDC, 25 mA

Temperature

Ambient, storage	-40 to +100 °C / -40 to +212°F
Ambient, operating	-40 to +85 °C / -40 to +185 °F
	ATEX: T4 /+85 °C, T5 /+55 °C, T6 /+40 °C; FM: T4/+80 °C

General data

Response time 10-90%	≤ 0.2 s
Humidity (non-condensing)	0 to 95 %RH
Intrinsic safety	ATEX: II 1 G EEx ia IIB T4, T5, T6 FM: Class I, Div.1, Group A-D

Power supply, polarity protected

Supply voltage	6.5 to 32 VDC
	8.5 to 30 VDC
Permissible ripple	4 Vp-p @ 50/60 Hz

Accuracy


Linearity (mA output to mV input)	±0.1 % of mV span
Calibration	±0.1 % of span
Cold Junction Compensation (CJC)	±1.0 °C /±1.8 °F
Temperature influence	±0.6 % of span/25 °C, ±0.7 % of span/50 °F
Temperature influence CJC	±1.25 °C/25 °C, ±2.5 °F/50 °F ¹⁾
Sensor wire influence	0.4 μV/Ω
RFI influence, 0.15-1000MHz, 10 V or V/m	±0.2 % of span (typical)
Supply voltage influence	±0.02 % of span/V
Supply ripple influence, 50/60 Hz, 4 Vp-p	±0.05 % of span
Long term stability	±0.1 % of span/year

Housing


Material / Flammability(UL)	Zinc alloy + ABS / V0
Mounting	DIN B-head or larger
Connection, single/stranded wires	≤2.5 mm ² , AWG 14
Weight	40 g
Protection, housing with cover/terminals	IP 20 / IP 10

¹⁾ ±2.5 °C/25 °C, ±5.0 °F/50 °F for type T


Input connections




Output connections



Output load diagram



Dimensions

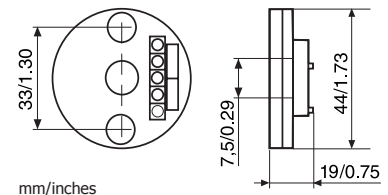

Ordering information

APAQ-HCF	70APHCF001
APAQ-HCFX (ATEX)	70APHCFX01
APAQ-HCFX (FM)	70APHCFX11
Head mounting kit	70ADA00011
Rail mounting kit	70ADA00013
Configuration	70CAL00001