


Model Number


The model number (as purchased) and serial number are engraved on the top of the right side surface of the module.




Connection reference numbers

Note: The DICE™ DS is only available in the 1/2" version and the DICE™ DM is available in both the 1/2" and the 1" version.

DICE™ DS SUCTION LIFT

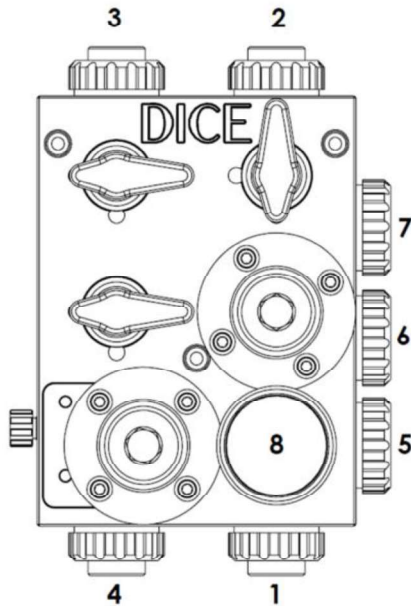

DICE™ DM FLOODED SUCTION

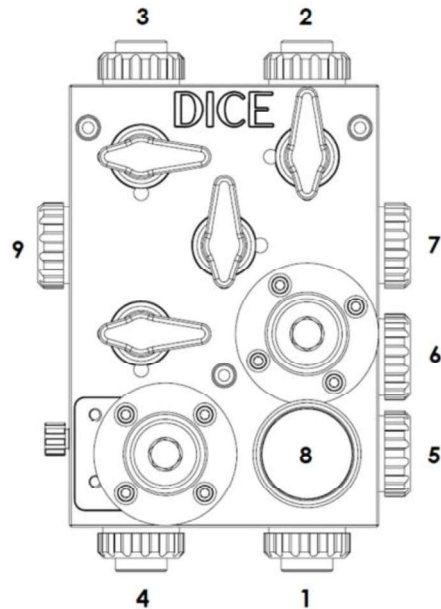

Model Number nomenclature

Example:

DICE™ DS (Only available in 1/2"): DIS21-MVII-3333444Z

DICE™ DM (Available in 1/2" & 1"): DIM21-MVII-3333444Z4

										#1	#2	#3	#4	#5	#6	#7	#8	#9	XXX		
DI	S	2	1	-	M	V	I	I	-	3	3	3	3	4	4	4	4	Z	4	-	XXX
Family																					
DICE DI																					
Configuration																					
DS	S																				
DM	M																				
Size (in)																					
1/2	2																				
1	4																				
Pressure																					
150 psi	1																				
250 psi	2																				
Block Material																					
PVC	V																				
PMMA	M																				
PVDF	D																				
Wetted Parts Material																					
PVC	V																				
CPVC	C																				
PVDF	D																				
O-ring Material																					
VITON	I																				
EPDM	E																				
Diaph Material																					
VITON	I																				
EPDM	E																				
Connections																					
Size 1/2"																					
Mushroom Nut Only																				0	
1/2" MNPT & Fits LMI Tubing Ferrule Adaptor																				1	
1/2" FNPT																				2	
1/2" Socket; For SCH 80 Rigid Piping																				3	
CAP																				4	
G5/8 & Fits Grundfos Tubing Ferrule Adaptor																				5	
Socket for 20mm OD Rigid Piping																				6	
Flare connector for 1/2" OD PFA Tubing																				7	
Isolator & Pressure																				Z	
Size 1"																					
Mushroom Nut Only																				0	
1" FNPT																				2	
1" Socket; For SCH 80 Rigid Piping																				3	
CAP																				4	
Socket for 32mm OD Rigid Piping																				6	
Isolator & Pressure																				Z	
No Connector & No Mushroom Nut																				W	
Option																					

Other standard materials:

- Ball valve handle: ABS or HDPE plastic
- Ball valve Seat: Virgin PTFE
- Bolts, nuts, washers, set screws: 18-8 stainless steel

Note:

- Vented ball valves offered as an option.
- **Other materials can be supplied upon request.**
- Options will be listed at the end of the Model Number in the option section.

Connectors

As per numbers in *Model Number Nomenclature*

Mushroom Nut Only



Connector code: **0**

1/2" MNPT & Fits LMI Tubing
Ferrule Adaptor



**LMI Ferrule Kit included;
Refer to LMI tubing connection system information sheet*

Connector code: **1**

FNPT



Connector code: **2**

Socket for SCH 80 Rigid Piping



Connector code: **3**

<p>CAP</p>  <p>Connector code: 4</p>	<p>G5/8 & Fits Grundfos Tubing Ferrule Adaptor</p>  <p><i>*Grundfos Ferrule Kit <u>not</u> included; sold separately</i></p> <p>Connector code: 5</p>
<p>Socket for Metric Rigid Piping</p>  <p>Connector code: 6</p>	<p>Flare connector for PFA Tubing</p>  <p><i>*Connection nut <u>not</u> included; sold separately</i></p> <p>Connector code: 7</p>
<p>Isolator & Pressure Gauge</p>  <p>Connector code: Z</p>	<p>No Connector & No Mushroom Nut</p>  <p>Connector code: W</p>