



Operating Instructions
for
Low Volume Rotating Vane
Flow Meter

Model: DPM-...



1. Contents

1. Contents.....	2
2. Note	3
3. Instrument Inspection.....	3
4. Regulation Use.....	3
5. Operating Principles.....	4
6. Mechanical Connection.....	4
6.1. Check service conditions:	4
6.2. Installation.....	4
7. Electrical Connection	5
7.1. General.....	5
7.2. DPM...0000 (OEM without cable)	5
7.3. Evaluation electronics: Frequency output (..F300;..F320;..F340;..F380).....	6
7.4. Evaluation electronics: Analogue output (..L..).....	6
7.5. Compact electronics: (..C30R, ..C30M, ..C34P, ..C34N)	6
7.6. Evaluation electronics: Pointer indication (..Z300, ..Z340).....	7
8. Operating – Evaluation Electronics	7
8.1. Frequency output.....	7
8.2. Analogue output.....	7
8.3. Compact electronics	7
8.4. Pointer indication (..Z300, ..Z340).....	7
9. Maintenance	8
10. Technical Information.....	8
10.1. Sensor data	8
10.2. Evaluation electronics.....	9
11. Order Codes	10
12. Dimensions (mm).....	11
13. EU Declaration of Conformance.....	12

Manufactured and sold by:

Kobold Messring GmbH
Nordring 22-24
D-65719 Hofheim
Tel.: +49(0)6192-2990
Fax: +49(0)6192-23398
E-Mail: info.de@kobold.com
Internet: www.kobold.com

2. Note

Please read and take note of these operating instructions before unpacking and putting the unit in operation, and follow the instructions precisely as described herein.

The devices are only to be used, maintained and serviced by persons familiar with these operating instructions and with the prevailing regulation applying to procedural safety and the prevention of accidents.

When used in machines, the measuring unit should be used only then when the machines fulfil the EC-machine guide lines.

PED 2014/68/EU

In acc. with Article 4, Paragraph (3), "Sound Engineering Practice", of the PED 2014/68/EU no CE mark.

Table 8, Pipe, Group 1 dangerous fluids

3. Instrument Inspection

These devices are checked before dispatch and shipped in perfect condition. Should damage to a device be visible, we recommend a thorough inspection of the delivery packaging. In case of signs of damage to the packaging, please inform your parcel service/forwarding agent immediately, since they are responsible for damages during transit.

Scope of delivery:

- Low Volume Rotating Vane Flow Meter model: DPM
- Operating Instructions

4. Regulation Use

Any use of the Rotating Vane Flow Meter, model DPM, which exceeds the manufacturers specification may invalidate its warranty. Therefore, any resulting damage is not the responsibility of the manufacturer. The user assumes all risk for such usage.

5. Operating Principles

KOBOLD model DPM flow meters are used for measuring and monitoring liquids. Due to its compact construction the measuring instrument is suitable for use with machines with minimum available space. The system can be used in a wide variety of applications because the output pulses can be analysed in many different ways.

The medium flows through a specially shaped housing nozzle and causes a vane to rotate. This rotary motion is sensed by optoelectronics in a non-contacting manner, and converted to a pulse frequency signal or an analogue signal. A frequency divider with pulse output is available as an option. The frequency is proportional to the flow velocity. The vane is sapphire-supported, this ensures a high degree of linearity and long service life.

6. Mechanical Connection

6.1. Check service conditions:

- flow
- max. operating pressures
- max. service temperature



Attention! Overage can cause damage to bearings and major measuring errors

6.2. Installation

- flow in direction of arrow (universal)
- avoid pressure and tensile loads, mechanically fix inlet and outlet lines at distances of 50 mm from the connections
- check connections for leaks

7. Electrical Connection

7.1. General




Attention! Make sure that the voltages in your plant correspond with the flow meter voltages.

- Make sure that the electrical supply lines are dead.
- We recommend a power supply cable with cross sectional area of 0.25 mm².




Attention! The instrument electronics may be damaged if the cable connections are wired incorrectly.

7.2. DPM...0000 (OEM without cable)




Feed voltage receiver	4,5 ... 16 V _{DC}
Feed current receiver	typ. 7 mA
Signal amplitude High	approx. operating voltage
Signal amplitude Low	0,2 V
Reverse voltage transmitter	3,0 V max.
Feed current transmitter	8 ... 12 mA
Output dissipation (power)	2,5 mW max.

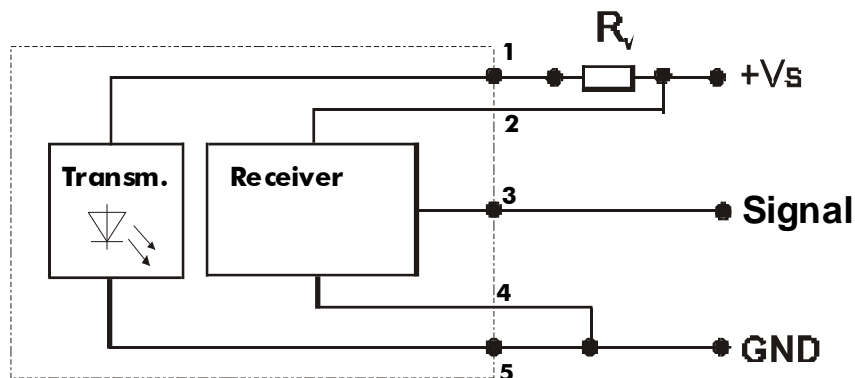

V _S	R _V *
5 V	470 Ω / 0,25 W
8 V	820 Ω / 0,25 W
12 V	1300 Ω / 0,25 W


* Not included in delivery.

7.3. Evaluation electronics: Frequency output (..F300;..F320;..F340;..F380)

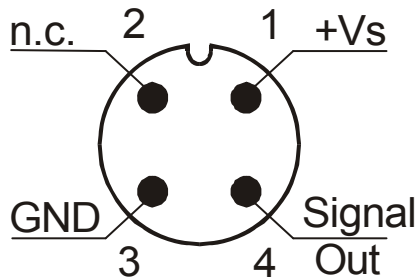


7.4. Evaluation electronics: Analogue output (..L..)

3-wire (DPM-..L303, ..L343)

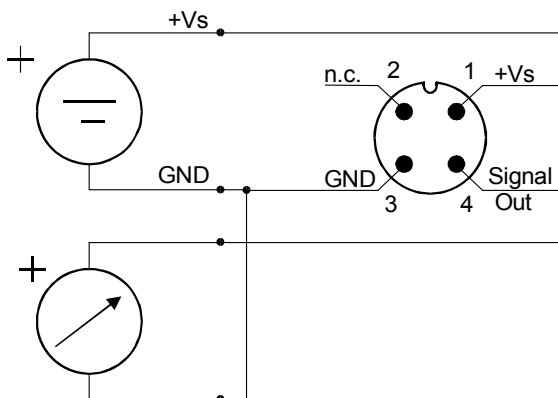


3-wire, DIN 43650 plug connector (DPM-..L403, ..L443)

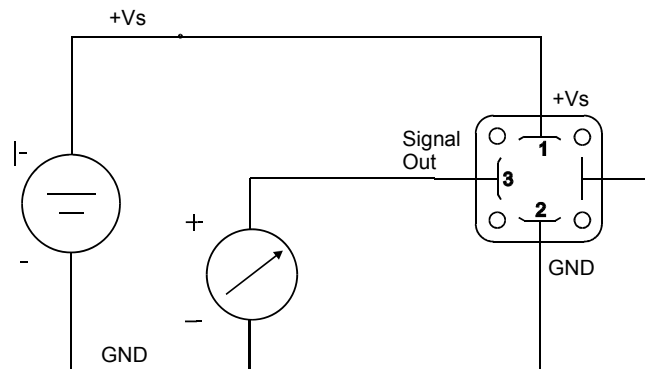

7.5. Compact electronics: (..C30R, ..C30M, ..C34P, ..C34N)

See supplement Operating Instructions
for compact electronics with frequency output

7.6. Evaluation electronics: Pointer indication (..Z300, ..Z340)

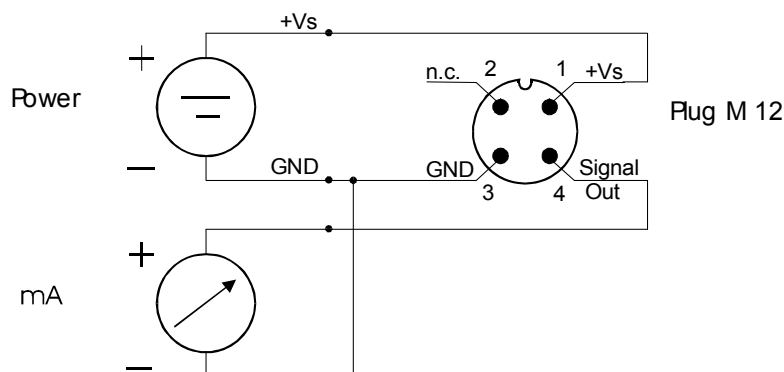

8. Operating – Evaluation Electronics

8.1. Frequency output

The measuring instruments are ready for operation after electrical connection.

8.2. Analogue output

The measuring instruments are ready for operation after electrical connection.

8.3. Compact electronics

The measuring instruments are factory programmed and ready for operation after electrical connection.

(To change the settings see Operating Instructions supplement for compact electronics with frequency output)

8.4. Pointer indication (..Z300, ..Z340)

The measuring instruments are ready for operation after electrical connection.

9. Maintenance

The measuring instrument requires no maintenance if the measured medium is clean. To prevent coating the sensor optics, we recommend that a filter is installed, for example the magnetic filter, model MFR.

If the sensor has to be cleaned, then it can be opened to gain access to the inside parts. Make sure that the sensor and especially the blades are not damaged. When re-assembling, make sure that the vane is positioned and oriented correctly.

Work on the sensor and electronics should only be carried out by the supplier, otherwise the guarantee is nullified.

10. Technical Information

10.1. Sensor data

Measuring accuracy:	
DPM..000, F300	± 2.5% f. s.
DPM...L, ...C, ...Z:	± 1% f. s.
Linearity:	± 1% f. s.
Repeatability:	0.5%
Medium temperature:	-40... +80 °C
Ambient temperature:	-30... +60 °C
Max. operating pressure:	16 bar
Protection:	IP 65
Materials:	
Case:	brass nickel-plated stainless steel 1.4404
Upper part:	brass nickel-plated stainless steel 1.4404
Union nut:	brass nickel-plated stainless steel 1.4305
Nozzle:	stainless steel 1.4405
Axle:	sapphire
Vane:	polypropylene
Vane mount:	polysulfone
Gasket:	NBR (standard) FPM or EPDM (optional)

10.2. Evaluation electronics

Frequency output (OEM)

Power supply:	4.5-12 V _{DC}
Supply current:	typically 7 mA
Signal amplitude high:	approximately power supply
Signal amplitude low:	≤ 0.2 V
Cut-off voltage transmitter:	3 V max.
Supply current transmitter:	8-12 mA
Output loss:	max. 2.5 mWatt
Pulse output:	NPN, open collector, max. 10 mA
Electrical connection:	solder pins

Frequency output (frequency divider option)

Power supply:	24 V _{DC} ±20%
Supply current:	40-50 mA
Pulse output:	PNP, open collector, max. 20 mA
Signal amplitude high:	power supply level approximately
Signal amplitude low:	≤ 0.2 V
Output loss:	max. 2.5 mWatt
Pulse output:	PNP, open collector, max. 20 mA
Electrical connection:	plug connector M12x1
Division ratio (option):	1...1/128, factory setting

Analogue output (plug-on display option)

Power supply:	24 V _{DC} ±20%
Output:	0-20 mA or 4-20 mA, 3-wire
Max. load:	500 Ω
Electrical connection:	plug connector M12x1 or DIN 43 650
Option:	plug-on display (with plug connector DIN 43 650 only)

Compact electronics

Display:	3-segment LED
Analogue output:	(0)4 – 20 mA adjustable, max. 500 Ω
Switching outputs:	1 (2) semiconductor PNP or NPN, factory set
Contact operation:	N/C / N/O contact programmable
Setting:	with 2 buttons
Supply:	24 V _{DC} ± 20%, 3-wire technology
Power input:	approx. 100 mA
Electrical connection:	plug connector M12x1

Pointer indication with analogue output

Case:	aluminium (PA6 GF30)
Display:	moving coil instrument, 240° display
Power supply:	24 V _{DC} ± 20 %
Output:	(0)4...20 mA, set at the factory, 3-wire technology
Max. load:	250 Ω
Electrical connection:	plug connector M12x1

11. Order Codes

Order Details (example: **DPM-1107 G1 0000**)

Meas. range [L/min] water	approx. frequency [Hz] at max. value	approx. pressure loss [bar] at max. value	Model		Connection	Electronic analyser
			Material brass	Material st. steel		
0.015 - 0.3	165	0.93	DPM-1103	DPM-1503..	<p>Frequency output, without CE</p> <p>..0000 = Frequency output, without cable (OEM), NPN ..F300 = Frequency output, plug connector M12x1, PNP ..F320 = Frequency divider 1:2, plug connector M12x1, PNP ..F340 = Frequency divider 1:4, plug connector M12x1, PNP ..F390 = divider 1...⁷/128, plug connector M12x1, PNP</p> <p>Analogue output</p> <p>..L303 = 0 - 20 mA output, 3-wire, M12x1 plug connector ..L343 = 4 - 20 mA output, 3-wire, M12x1 plug connector ..L403 = 0 - 20 mA output, 3-wire, plug connector DIN 43 650 ..L443 = 4 - 20 mA output, 3-wire, plug connector DIN 43 650</p> <p>Compact electronics*</p> <p>C30R = LED display, 2x open collector, PNP, plug connector M12x1 C30M = LED display, 2x open collector, NPN, plug connector M12x1 C34P = LED display, 4 - 20 mA, 1x open coll., PNP, plug connector M12x1 C34N = LED display, 4 - 20 mA, 1x open coll., NPN, plug connector M12x1</p> <p>Pointer indication*</p> <p>Z300 = 240° Pointer indication, 0 - 20 mA, plug connector M12x1 Z340 = 240° Pointer indication, 4 - 20 mA, plug connector M12x1</p>	
0.05 - 0.7	228	1.16	DPM-1107..	DPM-1507..		
0.05 - 1.0	217	0.53	DPM-1110..	DPM-1510..		
0.05 - 2.0	344	0.91	DPM-1120..	DPM-1520..		
0.05 - 3.0	372	0.61	DPM-1130..	DPM-1530..		
0.05 - 4.0	415	0.57	DPM-1140..	DPM-1540..		
0.05 - 5.0	439	0.57	DPM-1150..	DPM-1550..		


*Please specify flow direction in writing

Plug-on display
for model DPM...L443 (with 4-20 mA output and DIN plug connector)


Description	Order number
3-position LED, Plug connector DIN 43 650, 3-wire, Power supply through analogue output	AUF-3000

12. Dimensions


DPM-...F
with frequency output

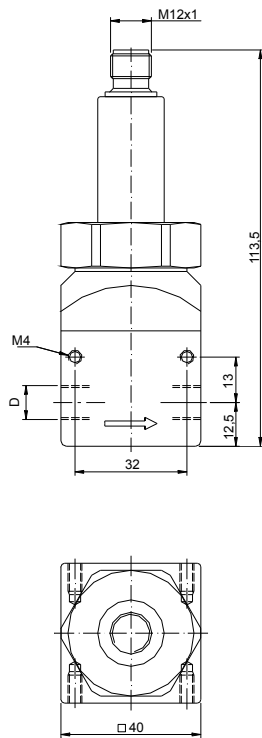


DPM-..L3
with analogue output

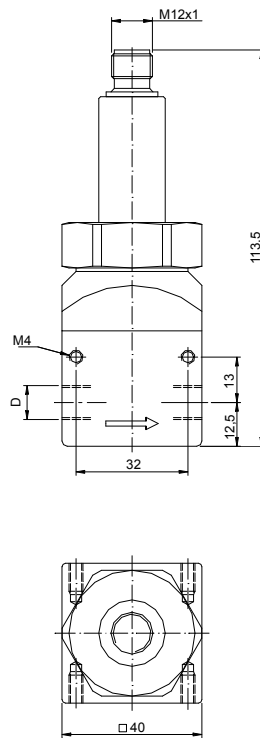


DPM-..C
with compact electronics

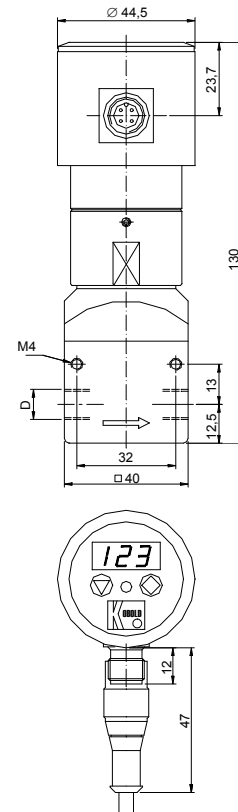

DPM-..L with analogue out
and plug-on display

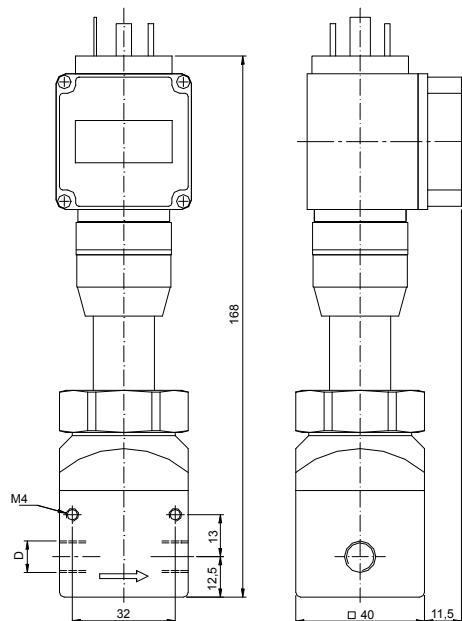

DPM-..Z with analogue output
and pointer indication

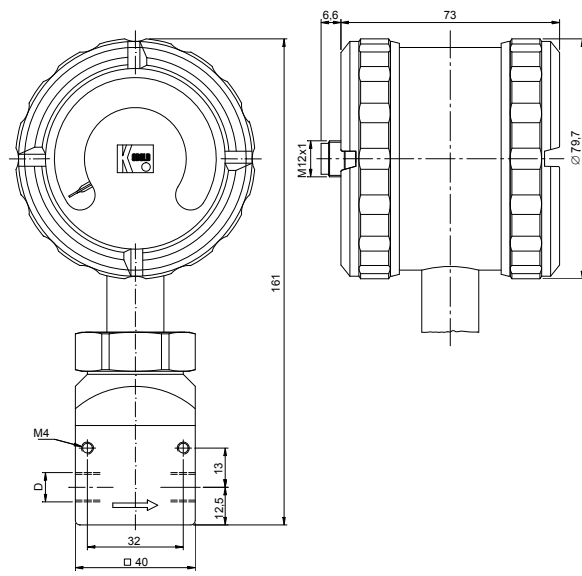

13. EU Declaration of Conformance

We, KOBOLD-Messring GmbH, Hofheim-Ts, Germany, declare under our sole responsibility that the product:

Low Volume Rotating Vane Flow Meter model: DPM-...

to which this declaration relates is in conformity with the standards noted below:

EN 61000-6-4:2011-09

Electromagnetic compatibility (EMC) - Part 6-4: Generic standards - Emission standard for industrial environments

EN 61000-6-2:2005

Electromagnetic compatibility (EMC) - Part 6-2: Generic standards - Immunity for industrial environments

EN 61010-1:2011-07

Safety requirements for electrical equipment for measurement, control and laboratory use - Part 1: General requirements

EN 60529:2014-09

Degrees of protection provided by enclosures (IP Code)

Also the following EC guidelines are fulfilled:

2014/30/EU
2011/65/EU


EMC Directive

RoHS (category 9) industrial monitoring and control instruments, compliant, no CE-marking for the transitional period until 2017

Hofheim, 18. Feb. 2016



H. Peters
General Manager



M. Wenzel
Proxy Holder