

U500w Ultrasonic Meter

Cold Water Stainless Steel Meter, 5/8, 5/8 x 3/4, 3/4 and 1 inch
NSF/ANSI Standard 61 Certified, Annex G

DESCRIPTION

The U500w Ultrasonic meter uses solid-state technology in a compact, totally encapsulated, weatherproof, and UV-resistant housing, suitable for building and property management submetering applications. Electronic metering provides information—such as rate of flow and reverse flow indication—and data not typically available through traditional, mechanical meters and registers. Electronic metering eliminates measurement errors due to sand, suspended particles and pressure fluctuations.

Offered in four sizes and lay lengths, the U500w meter features:

- Minimum extended low-flow rate lower than typical positive displacement meters.
- Simplified one-piece electronic meter and register that are integral to the meter body and virtually maintenance free.
- Sealed, non-removable, tamper-protected meter and register.
- Easy-to-read, 9-digit LCD display presents consumption, rate of flow, reverse-flow indication, and alarms.
- Battery powered—eliminates wiring.
- Compatible with AquaCUE[®] Flow Measurement Manager.

The U500w meter is available with an in-line connector for easy connection and installation to AquaCUE connectors.

APPLICATIONS

Use the U500w meter for measuring potable cold water in building/property management and industrial applications. The meter is also ideal for non-potable, reclaimed irrigation water applications or less than optimum water conditions where small particles exist.

The U500w meter complies with applicable portions of ANSI/AWWA Standard C700 and NSF/ANSI Standard 61, Annex G. There is currently no AWWA standard that specifically addresses ultrasonic meters for residential applications.

OPERATION & PERFORMANCE

As water flows into the measuring tube, ultrasonic signals are sent consecutively in forward and reverse directions of flow. Velocity is then determined by measuring the time difference between the measurement in the forward and reverse directions. Total volume is calculated from the measured flow velocity using water temperature and pipe diameter. The LCD display shows total volume and alarm conditions and can toggle to display rate of flow.



In the measured-fluid temperature range of 34...140° F (1°...60° C), the U500w “new meter” consumption measurement is accurate to:

- $\pm 1.5\%$ over the normal flow range
- $\pm 3.0\%$ from the extended low flow range to the minimum flow value

CONSTRUCTION

The U500w meters feature a stainless steel, lead-free meter housing, an engineered polymer and stainless steel metering insert, a meter-control circuit board with associated wiring, LCD, and battery. Wetted elements are limited to the pressure vessel, polymer/stainless steel metering insert and the transducers. The electronic components are housed and fully potted within a molded, engineered polymer enclosure, which is permanently attached to the meter housing. The transducers extend through the stainless steel housing and are sealed by O-rings.

The metering insert holds the stainless steel ultrasonic reflectors in the center of the flow area, enabling turbulence-free water flow through the tube and around the ultrasonic signal reflectors. The metering insert's patented design virtually eliminates chemical buildup on the reflectors, ensuring long-term metering accuracy.

METER INSTALLATION

The meter is completely submersible and can be installed using horizontal or vertical piping, with flow in the up direction. The meter will not measure flow when an “empty pipe” condition is experienced. An empty pipe is defined as a condition that occurs when the pipe is partially full.

SPECIFICATIONS

U500w Ultrasonic Meter Size	5/8 in. (16 mm)	5/8 x 3/4 in. (16 x 19 mm)	3/4 in. (19 mm)	1 in. (25 mm)
Operating Range	0.1...25 gpm (0.4...95 lpm)	0.1...25 gpm (0.4...95 lpm)	0.1...32 gpm (0.4...121 lpm)	0.4...55 gpm (1.5...208 lpm)
Extended Low-Flow Rate	0.05 gpm (0.2 lpm)	0.05 gpm (0.2 lpm)	0.05 gpm (0.2 lpm)	0.25 gpm (95 lpm)
Maximum Continuous Operation	25 gpm (95 lpm)	25 gpm (95 lpm)	32 gpm (121 lpm)	55 gpm (208 lpm)
Pressure Loss	4.3 psi at 15 gpm (0.3 bar @ 57 lpm)	2.3 psi at 15 gpm (1.6 bar @ 57 lpm)	2.0 psi at 15 gpm (0.14 bar @ 57 lpm)	1.8 psi at 25 gpm (0.12 bar @ 95 lpm)
Reverse Flow - Maximum Rate	4.0 gpm (15 lpm)	4.0 gpm (15 lpm)	4.0 gpm (15 lpm)	9.0 gpm (34 lpm)
Operating Performance	In the normal temperature range of 45...85° F (7...29° C), new meter consumption measurement is accurate to: <ul style="list-style-type: none"> • ±1.5% over the normal flow range • ±3.0% from the extended low flow range to the minimum flow value 			
Storage Temperature	- 40...140° F (- 40...60° C)			
Maximum Ambient Storage (Storage for One Hour)	150° F (66° C)			
Measured-Fluid Temperature Range	34...140° F (1°...60° C)			
Humidity	0...100% condensing; meter is capable of operating in fully submerged environments			
Maximum Operating Pressure of Meter Housing	175 psi (12 bar)			
Register Type	Straight reading, permanently sealed electronic LCD; digits are 0.28 in. (7 mm) high			
Register Display	<ul style="list-style-type: none"> • Consumption (up to nine digits) • Rate of flow (US gallons per minute or cubic meters per hour) • Alarms • Unit of measure factory programmed for gallons, cubic feet and cubic meters 			
Register Capacity	<ul style="list-style-type: none"> • 10,000,000 gallons • 1,000,000 cubic feet • 100,000 cubic meters 			
Totalization Display Resolution	<ul style="list-style-type: none"> • Gallons: 0.XX • Cubic feet: 0.XXX • Cubic meters: 0.XXXX 			
Battery	3.6-volt lithium thionyl chloride; battery is fully encapsulated within the register housing and is not replaceable; 20-year battery life			


MATERIALS

Meter Housing	316 stainless steel
Measuring Element	Pair of ultrasonic sensors located in the flow tube
Register Housing & Lid	Engineered polymer
Metering Insert	Engineered polymer & stainless steel
Transducers	Piezo-ceramic device with wetted surface of stainless CrNiMo

PHYSICAL DIMENSIONS


U500w Ultrasonic Meter Size	5/8 in. (16 mm)	5/8 x 3/4 in. (16 x 19 mm)	3/4 in. (19 mm)	1 in. (25 mm)
Size Designation X Lay Length	5/8 x 7-1/2 in. (16 x 191 mm)	5/8 x 3/4 x 7-1/2 in. (16 x 19 x 1901 mm)	3/4 x 7-1/2 in. or 3/4 x 9 in. (19 x 191 mm or 19 x 229 mm)	1 x 10-3/4 in. (25 x 273 mm)
Weight (without AquaCUE connector)	2.2 lb (1 kg)	2.1 lb (0.95 kg)	3/4 x 7-1/2 in.: 2.1 lb 3/4 x 9 in.: 2.4 lb (20 x 190 mm.: 0.95 kg or 20 x 229 mm: 1.08 kg)	3.1 lb (1.4 kg)
See illustrations below for Measurement Designations.				
Length (A)	7.5 in.(190 mm)	7.5 in.(190 mm)	7.5 in. or 8.98 in. (190 mm or 228 mm)	10.745 in. (273 mm)
Height (B)	2.404 in. (61 mm)	2.404 in. (61 mm)	2.404 in. (61 mm)	2.529 in. (64 mm)
Height (C)	3.014 in. (76 mm)	3.014 in. (76 mm)	3.094 in. (79 mm)	3.359 in. (85 mm)
Width (D)	3.898 in. (99 mm)	3.898 in. (99 mm)	3.898 in. (99 mm)	3.898 in. (99 mm)
Bore Size	5/8 in. (16 mm)	3/4 in. (19 mm)	3/4 in. (19 mm)	1 in. (25 mm)
Meter Thread	3/4 in. x 14 NPSM	1 in. x 11-1/2 NPSM	1 in. x 11-1/2 NPSM	1-1/4 in. x 11-1/2 NPSM
Tailpiece Length (E)	2.38 in.	2.50 in.	2.50 in.	2.62 in.
Tailpiece Coupling (F)	0.51 in.	0.47 in.	0.47 in.	0.50 in.
Tailpiece Pipe Adapter Thread (NPT)	1/2 in. (13 mm)	3/4 in. (19 mm)	3/4 in. (19 mm)	1 in. (25 mm)

Measurement Designations

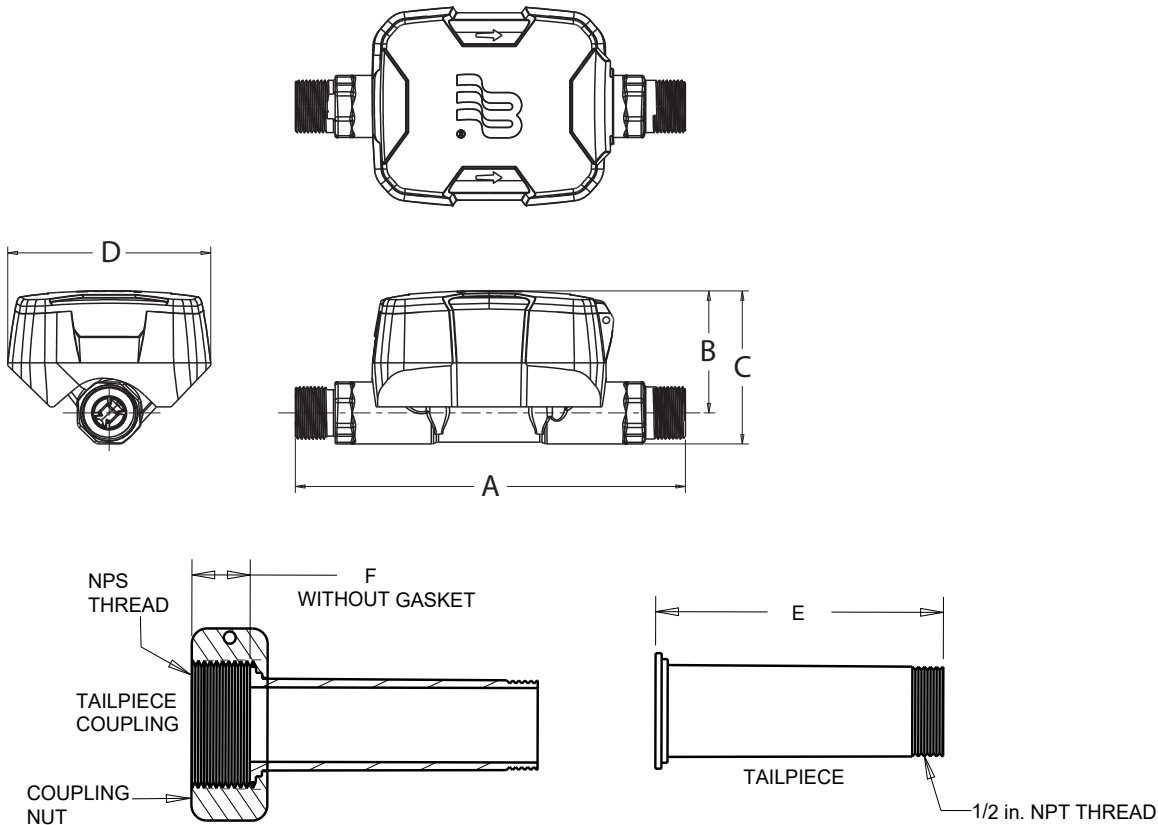

PRESSURE LOSS CHART


Rate of Flow in gallons per minute (gpm)

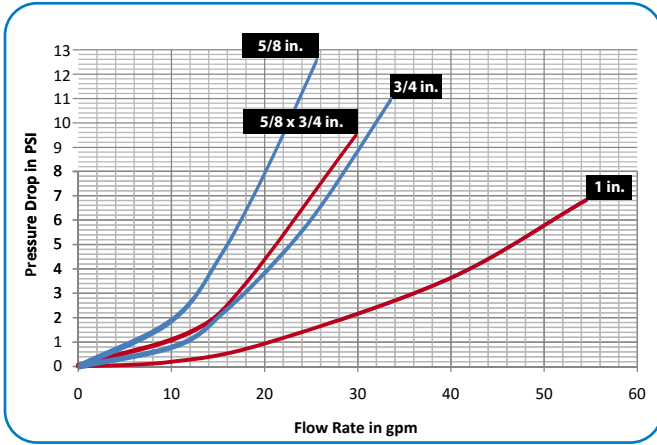


ACCURACY CHARTS

Rate of Flow in gallons per minute (gpm)


5/8 in. Meter

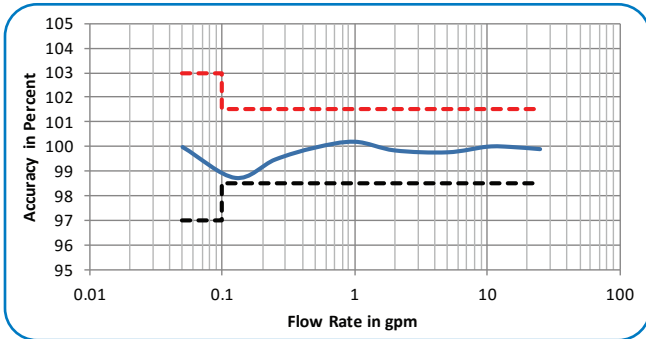


5/8 x 3/4 in. Meter

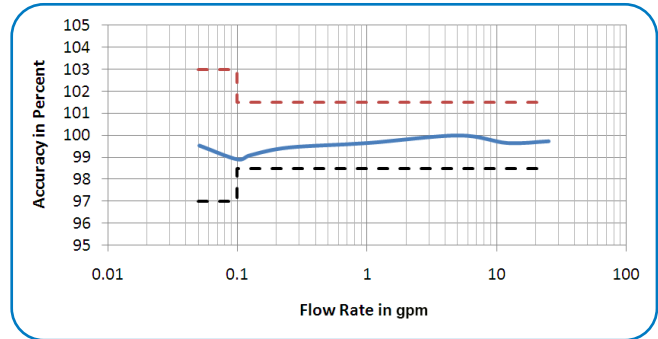

3/4 in. Meter

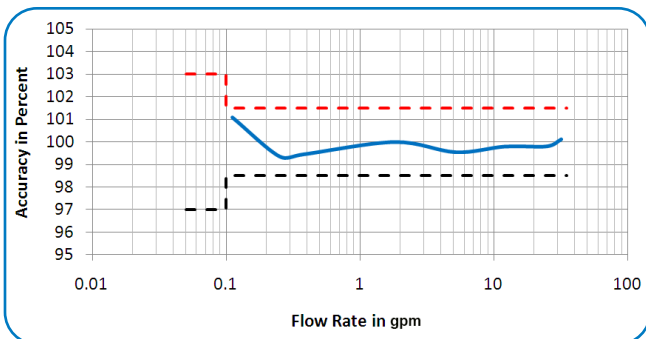

1 in. Meter

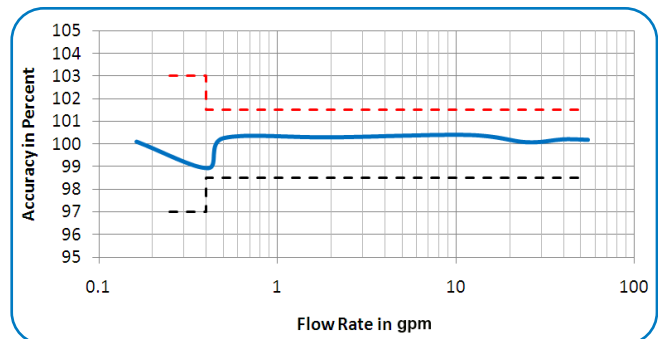

PART NUMBERS

Meter 5/8 inch

Dynasonics		UB	EAA		X	ES	CA	1	A1	Y2	XX	TF	XX	B0A
U500w Ultrasonic Meters														
PRODUCT TYPE		Stainless Steel Meter												
METER TYPE		5/8 in. (1/2 x 7-1/2 in.)	EAA											
WATER APPLICATION		Potable Water												
		Reclaimed Water (Stainless Steel Meter Only)												
CONNECTIONS / GASKETS		NPT Straight Adapter - Thick Washers					SC							
		NPSM - Thick Washers					XT							
ACCESSORIES		None												
REGISTRATION		Encoder							ES					
TECHNOLOGY		Meter with Cable (No Endpoint)												
REGISTRATION FACE		Standard												
UNIT OF MEASURE / DIAL RESOLUTION OUTPUT / VISUAL BILLING UNITS		9 Dial - 0.01 Gallon, GPM, 1000												
		9 Dial - 0.001 f3, GPM, 100												
		9 Dial - 0.0001 M3, GPM, 10												
TESTING		BADGER STD (TS-419)												
SERIALIZATION		Year of Mfg 9 Digit S/N												
APPLICATION (See Note)		None												
WIRING METHOD (See Note)		Twist Tight - 5 ft (MTR, ASSY)												
ENDPOINT SHIPMENT MODE		N/A												
RESERVED		Standard												

Meter 5/8 x 3/4 inch

Dynasonics		UB	EAC		X	ES	CA	1	A2	Y2	XX	TF	XX	B0A
U500w Ultrasonic Meters														
PRODUCT TYPE		Stainless Steel Meter												
METER TYPE		5/8 in. x 3/4 in. (3/4 x 7-1/2 in.)	EAC											
WATER APPLICATION		Potable Water												
		Reclaimed Water												
CONNECTIONS / GASKETS		NPT Straight Adapter - Thick Washers					SC							
		NPSM - Thick Washers					XT							
ACCESSORIES		None												
REGISTRATION		Encoder												
TECHNOLOGY		Meter with Cable (No Endpoint)												
REGISTRATION FACE		Standard												
UNIT OF MEASURE / DIAL RESOLUTION OUTPUT / VISUAL BILLING UNITS		9 Dial - 0.01 Gallon, GPM, 1000												
		9 Dial - 0.001 f3, GPM, 100												
		9 Dial - 0.0001 M3, GPM, 10												
TESTING		BADGER STD (TS-420)												
SERIALIZATION		Year of Mfg 9 Digit S/N												
APPLICATION (See Note)		None												
WIRING METHOD (See Note)		Twist Tight - 5 ft (MTR, ASSY)												
ENDPOINT SHIPMENT MODE		N/A												
RESERVED		Standard												

NOTE: For connectivity to AquaCUE, contact your Sales Representative.

Meter 3/4 x 7-1/2 inch

Dynasonics		UB	EBA		X	E5	CA	1		A3	Y2	XX	TF	XX	B0A
U500w Ultrasonic Meters															
PRODUCT TYPE															
Stainless Steel Meter		UB													
METER TYPE															
3/4 in. (3/4 x 7-1/2 in.)		EBA													
WATER APPLICATION															
Potable Water														P	
Reclaimed Water														R	
CONNECTIONS / GASKETS															
NPT Straight Adapter- Thick Washers														SC	
NPSM - Thick Washers														XT	
ACCESSORIES															
None					X										
REGISTRATION															
Encoder						E5									
TECHNOLOGY															
Meter with Cable (No Endpoint)							CA								
REGISTRATION FACE															
Standard								1							
UNIT OF MEASURE / DIAL RESOLUTION OUTPUT / VISUAL BILLING UNITS															
9 Dial - 0.01 Gallon, GPM, 1000															9AE
9 Dial - 0.001 ft3, GPM, 100															9FD
9 Dial - 0.0001 M3, GPM, 10															9MC
TESTING															
BADGER STD (TS-421)										A3					
SERIALIZATION															
Year of Mfg 9 Digit S/N											Y2				
APPLICATION (See Note)															
None														XX	
WIRING METHOD (See Note)															
Twist Tight - 5 ft (MTR, ASSY)														TF	
ENDPOINT SHIPMENT MODE															
N/A															XX
RESERVED															
Standard															B0A

Meter 3/4 x 9 inch

Dynasonics		UB	EBB		X	E5	CA	1		A3	Y2	XX	TF	XX	B0A
U500w Ultrasonic Meters															
PRODUCT TYPE															
Stainless Steel Meter		UB													
METER TYPE															
3/4 in. (3/4 x 9 in.)		EBB													
WATER APPLICATION															
Potable Water														P	
Reclaimed Water														R	
CONNECTIONS / GASKETS															
NPT Straight Adapter - Thick Washers														SC	
NPSM - Thick Washers														XT	
ACCESSORIES															
None					X										
REGISTRATION															
Encoder						E5									
TECHNOLOGY															
Meter with Cable (No Endpoint)							CA								
REGISTRATION FACE															
Standard								1							
UNIT OF MEASURE / DIAL RESOLUTION OUTPUT / VISUAL BILLING UNITS															
9 Dial - 0.01 Gallon, GPM, 1000															9AE
9 Dial - 0.001 ft3, GPM, 100															9FD
9 Dial - 0.0001 M3, GPM, 10															9MC
TESTING															
BADGER STD (TS-421)										A3					
SERIALIZATION															
Year of Mfg 9 Digit S/N											Y2				
APPLICATION (See Note)															
None														XX	
WIRING METHOD (See Note)															
Twist Tight - 5 ft (MTR, ASSY)														TF	
ENDPOINT SHIPMENT MODE															
N/A															XX
RESERVED															
Standard															B0A

NOTE: For connectivity to AquaCUE, contact your Sales Representative.

Meter 1 inch

Dynasonics

U500w Ultrasonic Meters

	UB	ECA		X	ES	CA	1		A4	Y3	XX	TF	XX	B0A
PRODUCT TYPE														
Stainless Steel Meter	UB													
METER TYPE														
1 in. (1 x 10-3/4 in.)		ECA												
WATER APPLICATION														
Potable Water														
Reclaimed Water														
CONNECTIONS / GASKETS														
NPT Straight Adapter- Thick Washers														
NPSM - Thick Washers														
ACCESSORIES														
None				X										
REGISTRATION														
Encoder					ES									
TECHNOLOGY														
Meter with Cable (No Endpoint)						CA								
REGISTRATION FACE														
Standard							1							
UNIT OF MEASURE / DIAL RESOLUTION OUTPUT / VISUAL BILLING UNITS														
9 Dial - 0.01 Gallon, GPM, 1000									9AE					
9 Dial - 0.001 ft3, GPM, 100									9FD					
9 Dial - 0.0001 M3, GPM, 10									9MC					
TESTING														
BADGER STD (TS-422)									A4					
SERIALIZATION														
Year of Mfg 9 Digit S/N Barcoded Primary and Lid Outside										Y3				
APPLICATION (See Note)														
None											XX			
WIRING METHOD (See Note)														
Twist Tight - 5 ft (MTR, ASSY)												TF		
ENDPOINT SHIPMENT MODE														
N/A													XX	
RESERVED														
Standard														B0A

NOTE: For connectivity to AquaCUE, contact your Sales Representative.

Control. Manage. Optimize.

Dynasonics is a registered trademark of Badger Meter, Inc. Other trademarks appearing in this document are the property of their respective entities. Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding contractual obligation exists. © 2021 Badger Meter, Inc. All rights reserved.

www.badgermeter.com