


## Process adapter hygienic pipe fitting

ADAPT IFM-DIN11851 DN32/1.25"

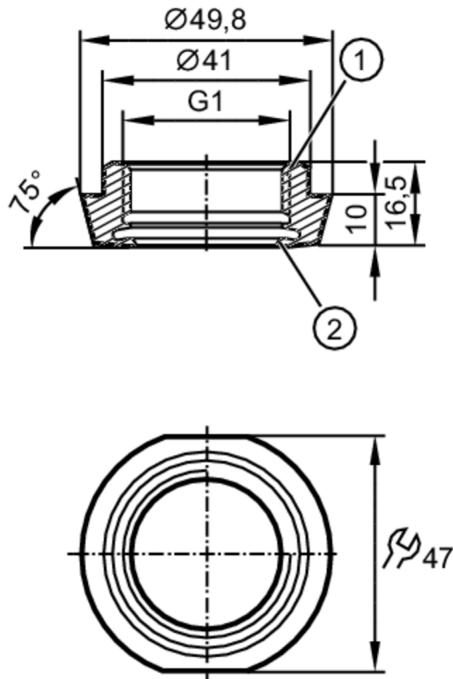

1 Aseptoflex Vario  
2 sealing area

CRN EC 1935/2004 

### Application

Pressure rating	40 bar	4 MPa
MAWP for applications according to CRN	40 bar	4 MPa

### Tests / approvals

Pressure Equipment Directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.
Safety instructions	The compatibility between medium and product material has to be checked in all applications.

### Mechanical data

Weight	[g]	134
Materials (wetted parts)		stainless steel (316L/1.4435) surface characteristics: Ra < 0,4 µm / Rz = 4 µm
Sensor connection		G 1 internal thread Aseptoflex Vario
Process connection		hygienic pipe fitting DN32 (1,25") Ø 49.8 mm DIN 11851
Sealing		Gasket
Hygienic equipment class to DIN 11866		H4

### Accessories

Items supplied	O-ring: 1 x (24 x 2 mm), EPDM, FDA compliant, E30054
Accessories (optional)	O-ring: 1 x 24 x 2, FKM, FDA compliant, E30123 sealing ring: 1, PEEK, FDA compliant, E30124

### Remarks

Pack quantity	1 pcs.
---------------	--------