


E33309



Process adapter DIN 11864

ADAPT DIN11864-3-A-BKS-A/DN50

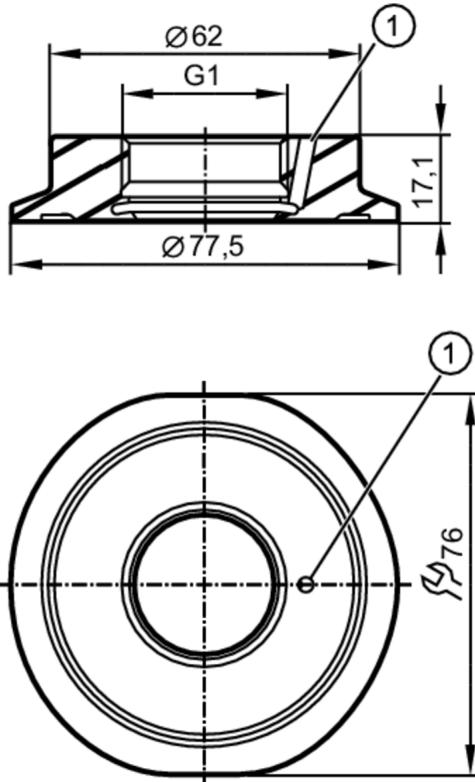

1 Leakage port



Application

Design	with leakage port	
Pressure rating	25 bar	2.5 MPa

Tests / approvals

Pressure Equipment Directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.
------------------------------	---

Safety instructions	The compatibility between medium and product material has to be checked in all applications.
---------------------	--

Mechanical data

Weight	[g]	380.5
Materials (wetted parts)		stainless steel (316L/1.4435) surface characteristics: Ra < 0,4 µm / Rz = 4 µm
Sensor connection		G 1 internal thread Aseptoflex Vario
Process connection		Clamp DN50 Ø 77.5 mm DIN 11864-3-A-BKS
Sealing		Gasket

Accessories

Items supplied	O-ring: 1 x (24 x 2 mm), EPDM, FDA compliant, E30054
Accessories (optional)	O-ring: 1 x 24 x 2, FKM, FDA compliant, E30123 sealing ring: 1, PEEK, FDA compliant, E30124

Remarks

Pack quantity	1 pcs.
---------------	--------