
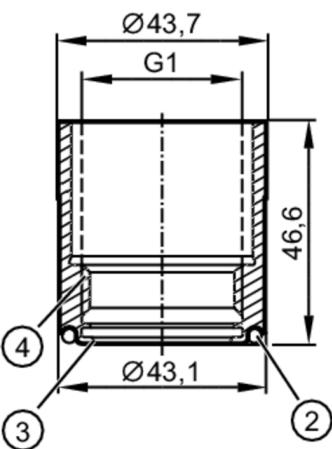
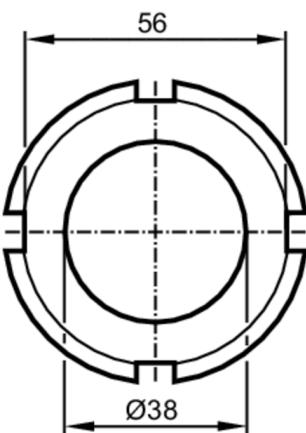


E33340

Universal process adapter

ADAPT UNI RD52

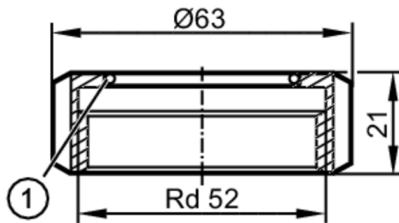

- 1 O-ring 38 x 2 (FKM) FDA compliant
- 2 O-ring 36 x 3 (EPDM) FDA compliant
- 3 sealing area
- 4 Aseptoflex Vario

EC 1935/2004

Application

Pressure rating 16 bar 1.6 MPa

Tests / approvals

Pressure Equipment Directive

A possible classification to PED depends on the application and has to be carried out by the user / operator.

Safety instructions

The compatibility between medium and product material has to be checked in all applications.

E33340

Universal process adapter

ADAPT UNI RD52



Mechanical data	
Weight	[g] 364.5
Materials (wetted parts)	stainless steel (316L/1.4435) surface characteristics: Ra < 0,4 µm / Rz = 4 µm
Sensor connection	G 1 internal thread Aseptoflex Vario
Process connection	universal process adapter Rd 52
Sealing	Gasket
Hygienic equipment class to DIN 11866	H4
Accessories	
Items supplied	O-rings: 1 x (24 x 2 mm), EPDM, FDA compliant, E30054 O-rings: 1 x (38 x 2 mm), FKM O-rings: 1 x (36 x 3 mm), EPDM, FDA compliant
Accessories (optional)	O-ring: 24 x 2, FKM, FDA compliant, E30123 sealing ring, PEEK, FDA compliant, E30124
Remarks	
Pack quantity	1 pcs.