


# E33731



## Process adapter for SMS pipe fitting

ADAPT IFM-SMS DN40/1.5"

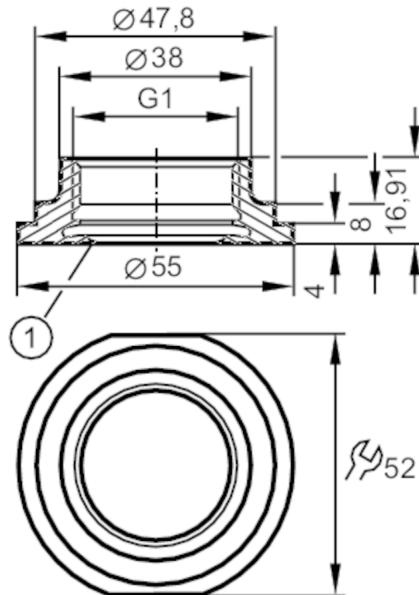

1 sealing edge

EC 1935/2004 FCM FDA

### Application

Pressure rating	40 bar	4 MPa
-----------------	--------	-------

### Tests / approvals

Pressure Equipment Directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.
------------------------------	---

Safety instructions	The compatibility between medium and product material has to be checked in all applications.
---------------------	--

### Mechanical data

Weight	[g]	139.5
--------	-----	-------

Materials (wetted parts)	stainless steel (316L/1.4435) surface characteristics: Ra < 0,4 µm / Rz = 4 µm
--------------------------	--

Sensor connection	G 1 internal thread Aseptoflex Vario
-------------------	--------------------------------------

Process connection	SMS pipe fitting DN40 (1,5") Ø 55 mm
--------------------	--------------------------------------

Sealing	metal to metal
---------	----------------

Hygienic equipment class to DIN 11866	H4
---------------------------------------	----

### Remarks

Pack quantity	1 pcs.
---------------	--------