


E80121



Plug-in power supply

Power Supply 24VDC/1.0A/ww

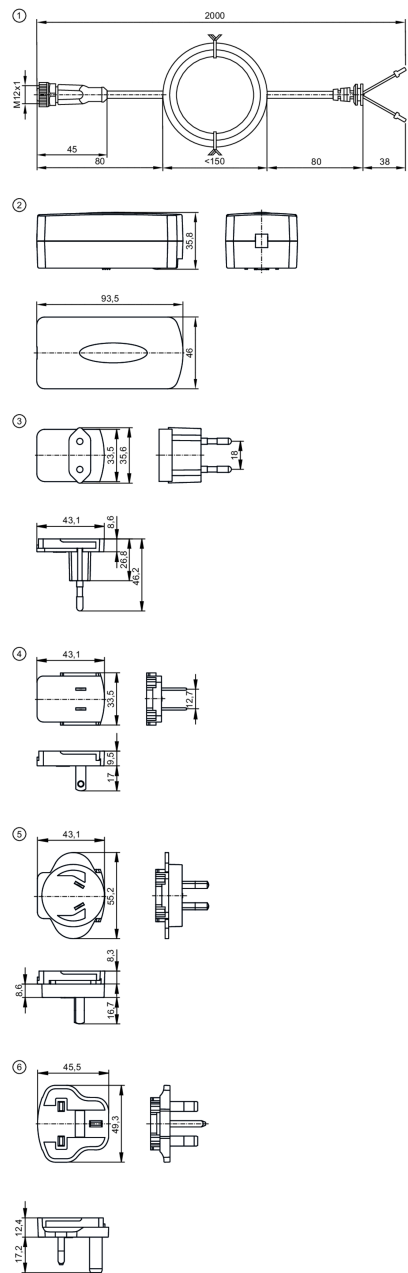

- 1 Connection cable M12
- 2 Power supply
- 3 plug EU
- 4 plug USA
- 5 plug AUS
- 6 plug UK



Electrical data		
Nominal frequency AC	[Hz]	50...60
Input voltage range AC	[V]	100...240
Output voltage DC	[V]	24
Protection class		II
Number of output circuits		1
Max. residual ripple	[mV]	240

E80121



Plug-in power supply

Power Supply 24VDC/1.0A/ww

Efficiency (nominal voltage 230 V AC / 50 Hz)	[%]	86.2
Input current (nominal voltage 230 V AC / 50 Hz)	[A]	1

Outputs

Output current, total	[A]	1
-----------------------	-----	---

Operating conditions

Ambient temperature	[°C]	0...40
Storage temperature	[°C]	-20...85
Protection		M12 connector: IP69K

Mechanical data

Weight	[g]	254.5
Housing		rectangular
Dimensions	[mm]	93.5 x 46 x 35.8
Materials		housing: plastics black

Accessories

Items supplied	Mains adapters: 1, EU	
	1, UK	
	1, USA	
	1, AUS	


Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 2 m; 2 x 0.5 mm²

Connector: 1 x M12; coding: A; Locking: brass, nickel-plated



1	L+
2	n.c.
3	L-
4	n.c.
5	n.c.