



—
your partner
in sensor
technology.

+ Datasheet EE040

OEM Humidity and Temperature Sensor



EE040

OEM Humidity and Temperature Sensor

The EE040 is designed for cost-effective measurement of the relative humidity (RH) and temperature (T) in OEM applications. It employs the high quality EEH210 RH and T sensing element, which stands for reliable and long term-stable measurement performance.

The electronics board and the components are protected by a special varnish. In addition, the proprietary E+E coating protects the RH sensor against dirt, dust and corrosion, which leads to excellent long-term stability even in polluted environment.

The measured data is available on two analogue voltage outputs.

The EE040 design, the plug connection and the mounting flange included in the scope of supply facilitate the design-in, installation and replacement.



EE040 duct mount



EE040 duct mount with lateral openings

Features

- Compact design
- Easy installation and replacement
- Excellent price / performance ratio




Protective Sensor Coating

The E+E proprietary sensor coating is a protective layer applied to the active surface of the sensing element. The coating substantially extends sensor lifetime and ensures optimal measurement performance in corrosive environment (salts, off-shore applications). Additionally, it improves the sensors' long term stability in dusty, dirty or oily applications by preventing stray impedance caused by deposits on the active sensor surface.

Dimensions

Values in mm (inch)

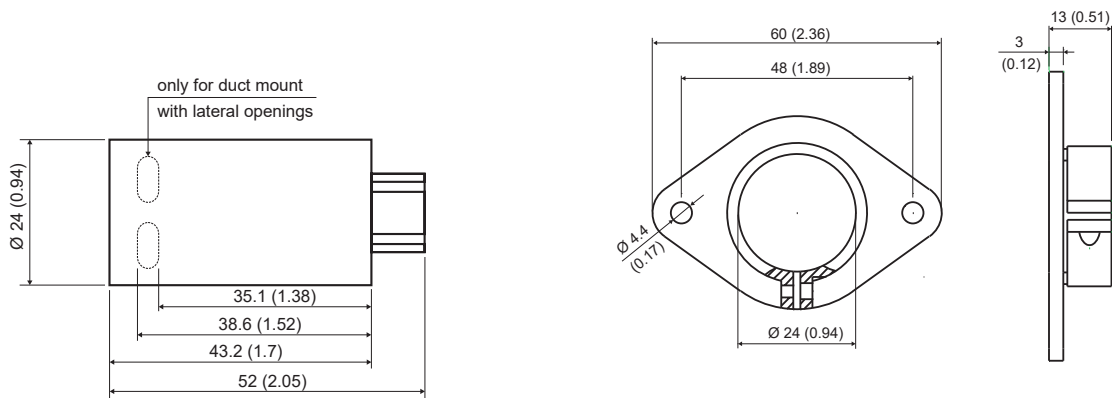

Technical Data

Measurands

Relative Humidity (RH)

Measuring range	0...100 %RH (non-condensing)	
Accuracy¹⁾ @ 20 °C (68 °F)	30...70 %RH 0...95 %RH	±3 %RH ±5 %RH
Response time t₆₃	Duct mount Duct mount with lateral openings	<45 s <30 s

1) Traceable to international standards, administrated by NIST, PTB, BEV,...
 The accuracy statement includes the uncertainty of the factory calibration with an enhancement factor k=2 (2-times standard deviation).
 The accuracy was calculated in accordance with EA-4/02 and with regard to GUM (Guide to the Expression of Uncertainty in Measurement).

Temperature (T)

Measuring range	-40...+85 °C (-40...+185 °F)	
Accuracy¹⁾ @ 20 °C (68 °F)	±0.3 °C (±0.54 °F)	




1) Traceable to international standards, administrated by NIST, PTB, BEV,...
 The accuracy statement includes the uncertainty of the factory calibration with an enhancement factor k=2 (2-times standard deviation).
 The accuracy was calculated in accordance with EA-4/02 and with regard to GUM (Guide to the Expression of Uncertainty in Measurement).

Outputs

Analogue

RH: 0...100 % T: -40...+85 °C (-40...+185 °F)	0 - 2.5 V
Output load	≥5 kΩ

General

Power supply class III  USA & Canada: Class 2 supply necessary	5 V DC ±10 %		
Current consumption, typ.	Without load	2 mA	
	With 5 kΩ load	<3.5 mA	
Start-up time, typ.	4 s		
Electrical connection	Appropriate for Molex 6471 (4 pins) and female crimp contacts 4809 555L		
Storage conditions	-40...+60 °C (-40...+140 °F) 0...95 %RH (non-condensing)		
Enclosure material	Polyphenyleneoxide (PPO), GF20, UL94HB approved		
Protection rating	Connector side	IP30	
	Front side (duct mount)	IP50	
	Front side (duct mount with lateral openings)	IP20	
Electromagnetic compatibility¹⁾	EN 61326-1 FCC Part15 Class A	EN 61326-2-3 ICES-003 Class A	Industrial environment
Conformity	 		

1) EE040 is not protected against surge.

Ordering Guide

	Feature	Description	Code
Hardware Configuration			EE040-
	Type	Duct mount	T2
		Duct mount with lateral openings	T18
	Filter	Plastic grid, polycarbonate body	F1
Metal grid, polycarbonate body		F3	
Software Setup Analogue Outputs	Output signal	0 - 2.5 V	No code
	Output 1 measurand	Relative humidity RH [%]	No code
	Output 2 measurand	Temperature T [°C]	No code
		Temperature T [°F]	MB2
	Output 2 scaling low	0	No code
		Value	SBLValue
	Output 2 scaling high	50	No code
Value		SBHValue	

Order Example


EE040-T18F3SBL-20SBH40

Feature	Code	Description
Type	T18	Duct mount with lateral openings
Filter	F3	Metal grid, polycarbonate body
Output 1 measurand	No code	Relative humidity RH [%]
Output 1 scaling low	No code	0
Output 1 scaling high	No code	100
Output 2 measurand	No code	Temperature T [°C]
Output 2 scaling low	SBL-20	-20
Output 2 scaling high	SBH40	40

Accessories

For further information see datasheet [Accessories](#).

Accessories	Code
Connection cable	2 m (6.6 ft) HA010305
	5 m (16.4 ft) HA010306

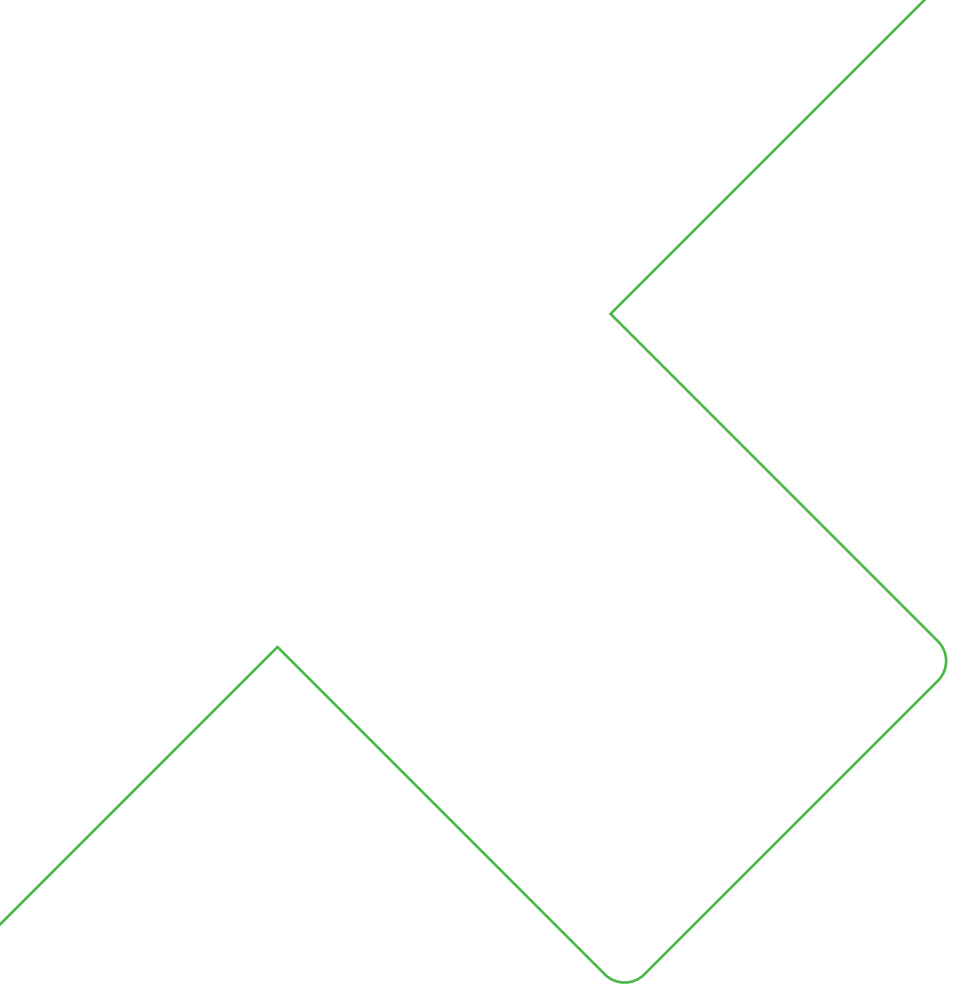

Company Headquarters &
Production Site

E+E Elektronik Ges.m.b.H.
Langwiesen 7
4209 Engerwitzdorf | Austria
T +43 7235 605-0
F +43 7235 605-8
info@epluse.com
www.epluse.com

Subsidiaries

E+E Sensor Technology (Shanghai) Co., Ltd.
T +86 21 6117 6129
info@epluse.cn

E+E Elektronik France SARL
T +33 4 74 72 35 82
info.fr@epluse.com

E+E Elektronik Deutschland GmbH
T +49 6171 69411-0
info.de@epluse.com

E+E Elektronik India Private Limited
T +91 990 440 5400
info.in@epluse.com

E+E Elektronik Italia S.R.L.
T +39 02 2707 86 36
info.it@epluse.com

E+E Korea Co., Ltd.
T +82 31 732 6050
info.kr@epluse.com

E+E Elektronik Corporation
T +1 847 490 0520
info.us@epluse.com

Version v1.2 | 01-2023
Modification rights reserved



—
your partner
in sensor
technology.

www.epluse.com