



EiWiSER

Wireless Accelerometer

EI WISER

Wireless Accelerometer

EI-WiSER is the industry standard wireless accelerometer for portable route based data collection and dynamic balancing



Overview

The EI-WiSER kit includes the WiSER accelerometer, USB Receiver and a Magnetic Base, giving you full freedom and mobility to perform in-situ vibration data collection and dynamic balancing.

An Optional second accelerometer is available for phase, cross channel analysis and ODS.

WiSER is designed with portability, ruggedness, and full featured capability in mind. The only complete wireless vibration and dynamic balancing analysis solution on the market, -WiSER integrates seamlessly with our DigivibeMX software to achieve highly accurate measurements.

In addition, EI-WiSER has a 5-pin LEMO connector that allows the connection of a tachometer (optical sensor), a second accelerometer or the USB cable to recharge the battery of the device.



Main Features:

- 2.4 GHz **Wireless** Accelerometer
- Rechargeable Battery
- Up to 10 hours of **battery life**
- 5-pin LEMO connector for Additional Sensors
- IP 67 protection grade
- **Automatic shut-down** (stand-by mode)
- High power Magnetic Base included

Download **Free WiSER**
applications
for **iPAD & iPHONE**



EI-WISER


Technical Specs

Sensitivity	100 mV/g
Operation Distance (max)	30 m
Sample Rate	48 kHz/ 24 bits
Dynamic Range	20 G
Battery Type	CR123
Battery Life	10 hr/10,000 hr
Dimensions (LxD)	91.50 mm x 40.19 mm
Weight	110 g (230g/with Mag. Base)
Protection Grade	IP67
Software Compatible	Digivibe, WiSER VIBE, WiSER Balance
Standard	5-Pin LEMO (5V)
Freq. response	(+/-3dB): 0.32 - 15 kHz

Average values under standard conditions

Universal Receiver

Makes **WiSER** compatible with almost all vibration analyzers and balancing devices.

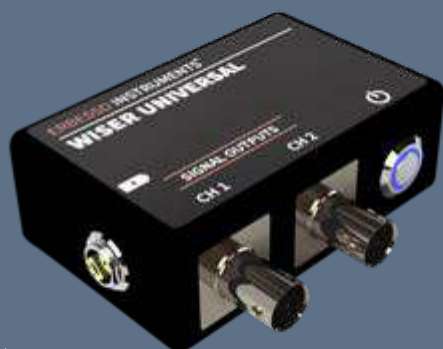

Go Wireless with your
Existing Analyzer Today

WISER UNIVERSAL

Technical Specs

Compatible Sensor	Ei-WiSER
A/D Converter	24 bits
Sample Rate	44,100 hz
Inner Power Supply	5VCD/1A
Battery Type	Non-removable Li-ion battery
Battery Life	26 hrs/6 years (Stand by)
Operation Distance	30 m
Storage Temperature:	- 40 °C a - 120 °C
Operating Temperature	- 40 °C a - 85 °C
IP Rating	IP67
Material	Nylon
Weight	110 g
Size	77.0 mm x 50.0mm x 27.2 mm

Average values under standard conditions

ERBESSD INSTRUMENTS®

WORLDWIDE toll-free:

+1-877-223-4606

ENGLISH:

Sales, Service & Support Engineer

+1-518-874-2700

info@erbessdreliability.com

SPANISH & FRENCH:

Sales, Service & Support Engineer

+52 (55) 6280-7654

info@erbessd-instruments.com

BUY ONLINE

www.erbessdreliability.com

www.erbessd-instruments.com

ALL THE IMAGES ARE FOR ILLUSTRATIVE PURPOSES ONLY. THE FINAL PRODUCT MAY VARY DEPENDING ON THE VERSION AND/OR THE CHANGES OR UPGRADES MADE TO THE PARTS AND COMPONENTS OF THE DEVICES

© 2018 ERBESSD INSTRUMENTS LLC

W-2018.08.6.17