



Badger Meter

Industrial Registers

Model ER-9/R (Remote) Digital Resettable Totalizer

DESCRIPTION

The Badger Meter® Model ER-9 register is a meter-mounted totalizer and rate indicator with scaled pulse output designed for use with all meters in the Badger Meter product line.

The ER-9/R is the remote version and can be used with any Badger Meter flow meter that is equipped with a compatible pulse endpoint. A rear adapter plate is provided with the remote version for attachment to a wall or other suitable surface.

The unit is battery powered with two lithium batteries. Optical sensors and other electronic sensors with open collector outputs must be externally powered.

The totalizing function uses an easy-to-read, 8-digit numeric LCD display. The rate mode uses a similar 4-digit display.

Step-by-step independent programming of scale factors for the rate and totalization functions allows you to program any engineering unit such as gallons per minute and total gallons. The scaled pulse output has its own independent scaler.

When the indicator is used as a totalizer, the display can be reset to zero from the front panel button or from an external switch wired directly to a rear terminal. The front panel Reset function can be inhibited.

You can backlight the display by connecting a DC power source to the unit.

When the battery is low, an indicator appears on the screen several weeks before the end of the battery life to remind the operator that the battery is in need of replacement. The unit operates off the batteries for a minimum of 6 months when using pulse output. When connected to a DC power source, the back-up battery life is 5 years.

OPERATION

Fluid flowing through the meter causes pulses to be generated by the sensor. Each pulse represents a specific fluid volume.

Example: the Model 25 Disc meter generates 198 pulses for every gallon of fluid passing through the meter. Using a scale factor, the pulse indication on the display will be changed to a meaningful unit of measure.




FEATURES

- All solid-state components for long life
- Battery powered
- Low battery indicator
- Corrosion-resistant plastic housing built to NEMA 4X specifications
- Programmable for rate of flow and totalization
- Backlit display available
- Front panel totalizer Reset function can be disabled
- Reprogramming can be inhibited
- Scaled pulse output

SPECIFICATIONS

Count Input (Terminal 2)		Power Source	
Type	NPN signal, contact closure	Type	Dual 3V Lithium battery
Count speed	NPN, 280 Hz maximum, Contact, 95 Hz maximum	Replacement part #	62576-001
Logic	Low < 1.0V DC, High > 2.0V DC	Battery life expectancy	5 years typical if using external DC supply 6 months if used alone with 50% duty cycle output
Minimum pulse width	NPN=1.78 µs, Contact=5 ms	Low power indicator	"Low Bat" flashes on display approx. 2 weeks prior to end of battery life
Maximum input	28V DC	Display	
Impedance	1 Meg to V BATT	Type	Supertwist LCD for use with or without backlighting
Front Panel Program Enable (Terminal 5)		Number	8 digits count value, 4 digits (plus dummy zero) for rate value
Type	NPN signal, contact closure; level sensitive	Height	12 mm (0.472")
Maximum input	28V DC	Backlighting	Green Illumination over whole viewable area with a 10...28V DC supply (Terminal 8)
Remote Reset Input (Terminal 4)		Physical	
Type	NPN signal, contact closure; edge sensitive	Dimensions	36 mm x 72 mm, 38 mm deep 1.417" x 2.835", 1.496" deep
Frequency response	30 Hz (50% duty cycle)	Mounting	Panel mount (mounting bracket supplied) 33 mm x 68 mm (+ 0.3 mm) panel cutout 1.299" x 2.677", (+ 0.012") panel cutout
Maximum input	28V DC	Connections	Up to 8 screw terminals
Output (Terminals 6 & 7)		Weight	Approximately 13 ounces
Type	Isolated Photomos relay		
Load rating	0.1 Amp @ 30V AC/V DC		
Transition time	< 5 ms		
Operating Temperature			
Indicator	32...140° F (0...60° C)		

WIRING TERMINALS

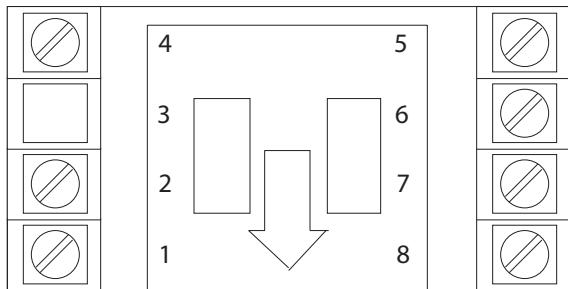

- 1 DC common
- 2 Count input – NPN signal 280 Hz max. or dry contact
- 3 Not Used
- 4 Remote reset – resets count value when switched to common
- 5 Front panel program enable – allows access to program mode when connected to common
- 6 Solid-state relay, pulse output (+)
- 7 Solid-state relay, pulse output (-)
- 8 DC supply input, 1...28V DC for backlighting and/or powering the output

Control. Manage. Optimize.

Trademarks appearing in this document are the property of their respective entities. Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding contractual obligation exists. © 2018 Badger Meter, Inc. All rights reserved.

www.badgermeter.com

The Americas | Badger Meter | 4545 West Brown Deer Rd | PO Box 245036 | Milwaukee, WI 53224-9536 | 800-876-3837 | 414-355-0400
 México | Badger Meter de las Americas, S.A. de C.V. | Pedro Luis Ogazón N°32 | Esq. Angelina N°24 | Colonia Guadalupe Inn | CP 01050 | México, DF | México | +52-55-5662-0882
 Europe, Eastern Europe Branch Office (for Poland, Latvia, Lithuania, Estonia, Ukraine, Belarus) | Badger Meter Europe | ul. Korfantego 6 | 44-193 Knurów | Poland | +48-32-236-8787
 Europe, Middle East and Africa | Badger Meter Europa GmbH | Nurtlinger Str 76 | 72639 Neuffen | Germany | +49-7025-9208-0
 Europe, Middle East Branch Office | Badger Meter Europe | PO Box 341442 | Dubai Silicon Oasis, Head Quarter Building, Wing C, Office #C209 | Dubai / UAE | +971-4-371 2503
 Slovakia | Badger Meter Slovakia s.r.o. | Racianska 109/B | 831 02 Bratislava, Slovakia | +421-2-44 63 83 01
 Asia Pacific | Badger Meter | 80 Marine Parade Rd | 21-06 Parkway Parade | Singapore 449269 | +65-63464836
 China | Badger Meter | 7-1202 | 99 Hangzhong Road | Minhang District | Shanghai | China 201101 | +86-21-5763 5412
 Switzerland | Badger Meter Swiss AG | Mittelholzerstrasse 8 | 3006 Bern | Switzerland | +41-31-932 01 11

Legacy Document Number: ITB-095-04