

# FLIR E-Series Thermal Imaging Cameras



## E-Series

A Brand New Line

Now the Leader in its Class

Groundbreaking Performance & Affordability

Superior Point & Shoot Thermal Imagery


Built-in Digital Camera & Laser Pointer

Mobile Device Wi-Fi Connectivity

Large Bright Touchscreen



# The E-Series

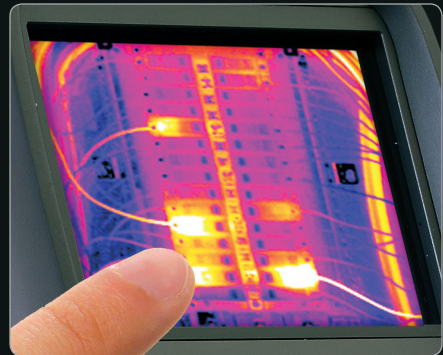

Large 3.5" Touchscreen Puts Fast Tools at Your Fingertips



- 3 MP Digital Camera
- LED Lamp
- Laser Pointer

Visible Light Pictures Align with Thermal Images



Connect to iPhone or iPad via Wi-Fi to Use the FLIR Viewer App for Processing and Sharing Results



Large Backlit Buttons Fit Bare Hands or Gloves



## E-Series Features


Presenting the best performance and value in compact thermal imaging cameras ever, designed to fit beautifully into your IR inspection program, budget, and the palm of your hand.



Spot LED Light for Dark Corners



Add Up to 3 Moveable Measurement Spots Easily

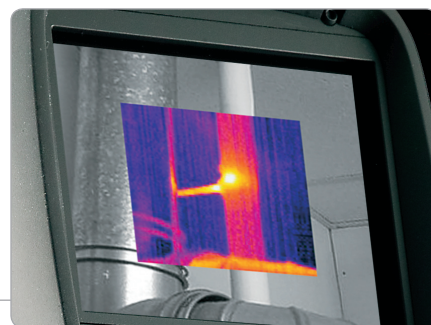

Picture-in Picture Display

**Superior Thermal Imaging** – Up to 76,800 pixels (320 x 240) for better long-range accuracy and the highest level of point & shoot camera IR resolution

**Improved Digital Camera** – 3 megapixel resolution provides clearest visible light pictures in its class and includes bright LED lamp that doubles as a flashlight

**New! Large Landscape Touchscreen** – Brighter than other brands, the E-Series touchscreen provides an intuitive interface that takes full advantage of the entire 3.5" display with no image cropping

**New! Wi-Fi Connectivity** – Send images and data to an iPhone® or iPad® to share reports and critical information quickly using FLIR View App

**Laser Pointer** – Pinpoints a reference spot with a laser and aligns a marker to it on the image for precise detection

**Accurate Temperature Measurements** – Accuracy calibrated within 2% or +/- 2°C to meet the standard you can always trust FLIR to deliver

**Scalable P-i-P and Thermal Fusion** – Overlay thermal and visible images for easy location identification and clearer documentation

**Multiple Measurements** – Add up to 3 box areas and 3 moveable spots using the touchscreen to gather more detailed temperature information

**MeterLink** – Wirelessly transmit vital diagnostic data from clamp and moisture meters directly to the camera for annotating thermal images to further support findings and decisions

**Annotation** – Add voice comments via Bluetooth headset and text notes from the touchscreen keypad

**InstantReport** – Generate a professional PDF document directly from the camera right on site

**Plenty of Extras** – Small, light, and rugged with large, backlit, easy-to-operate buttons, 6 palette choices, and more

### A New Choice in Compact Thermal Imaging

- **E30** – 19,200 pixels  
*Economical and efficient*
- **E40** – 19,200 pixels  
*Wi-Fi to mobile devices & higher sensitivity*
- **E50** – 43,200 pixels  
*Superior accuracy and sensitivity*
- **E60** – 76,800 pixels  
*Best point & shoot thermal resolution*

### E30

#### Includes:

- High quality thermal imaging at 19,200 pixels (160 x 120)
- Thermal sensitivity of 0.10°C
- 3.5" touch-screen LCD
- Manual focus
- 60 Hz image frequency
- Auto/manual level span adjustments
- Temperature calibration standard at 250°C
- Isotherm and automatic hot/cold detection marker
- Radiometric and non-radiometric IR video streaming
- Laser pointer
- Composite video and USB-mini outputs
- FLIR Tools software for camera updates

### E40

#### Additional Features:

- 3 megapixel digital visible light camera with lamp
- Wi-Fi connectivity to iPad/iPhone FLIR Viewer application
- Thermal sensitivity of 0.07°C
- Picture-in-Picture to superimpose thermal images
- Temperature calibration standard at 650°C
- DeltaT temperature difference function
- 2x digital zoom
- 3 moveable spots and 3 box areas
- Voice & text annotation
- Fixed Picture-in-Picture to overlay thermal & digital images
- MeterLink via Bluetooth to clamp and moisture meters

### E50

#### Additional Features:

- Higher quality IR at 43,200 pixel (240 x 180) resolution
- Thermal sensitivity of 0.05°C
- 4x digital zoom
- Thermal fusion to blend IR with visible light images
- Scalable Picture-in-Picture

### E60

#### Additional Features:

- Best point & shoot resolution at 76,800 pixels (320 x 240)
- InstantReport



## Wi-Fi Connectivity to Mobile Devices

Download the new FLIR Viewer App from the Apple Store to your iPad or iPhone and link to E-Series cameras via Wi-Fi. Transfer images to your mobile device, then use it to add further measurement spots, readjust span and level, change palettes, create reports, and email findings to decision makers easily. It's an efficient way to make a big impact.




## MeterLink™

Be sure you're getting critical electrical load readings so you make the right call. Quantify the severity of electrical problems with MeterLink-enabled clamp meters that use Bluetooth wireless communication to send data to the FLIR camera for annotation on stored thermal images. Contact FLIR to learn about other tools that connect with MeterLink.



## InstantReport

Create professional reports on board your camera with InstantReport. FLIR's analysis software has always offered professional results and been easy to use. Now create reports without a PC! InstantReport includes thermal and visual images along with your measurement tools and text & sketch annotations in a standard PDF document that's easy to share right from the touchscreen.

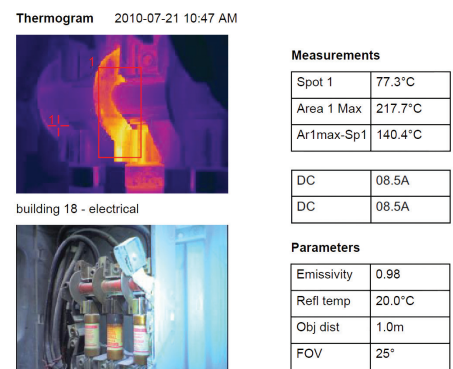

## Imaging Specifications



Model Number	E30	E40	E50	E60
<b>Imaging</b>				
Resolution	160 x 120	160 x 120	240 x 180	320 x 240
Total Pixels	19,200	19,200	43,200	76,800
Thermal Sensitivity	<0.10°C	<0.07°C	<0.05°C	<0.05°C
Accuracy	+/-2% or 2°C			
Temperature Range	-4°F to 482°F (-20°C to 250°C)	4°F to 1,202°F (-20°C to 650°C)	-4°F to 1,202°F (-20°C to 650°C)	-4°F to 1,202°F (-20°C to 650°C)
Lens Options	Standard: 25° x 19°			
Zoom		2x Continuous Digital	4x Continuous Digital	4x Continuous Digital
Focus	Manual			
Uncooled Microbolometer	x	x	x	x
Color LCD Touch Screen	3.5" (320 x 240 )			
3 MP Video Camera w/Lamp		x	x	x
Picture-in-Picture		Fixed	Scalable	Scalable
Fusion			x	x
Laser Spot	x	x	x	x
Video Out	Composite			
Frame Rate	60 Hz			
<b>Analysis</b>				
Moveable Spots	1	3	3	3
Box Areas	1	3	3	3
Delta T		x	x	x
<b>Annotation</b>				
Voice		x	x	x
Text		x	x	x
<b>File Storage</b>				
Radiometric JPG to SD Card	x	x	x	x
MPEG4 Video Recording		x	x	x
<b>Other</b>				
Wi-Fi to iPhone/iPad		x	x	x
MPEG4 Streaming Video Wi-Fi	x	x	x	x
Bluetooth to PC/Smartphone		x	x	x
MeterLink		x	x	x
InstantReport				x
FLIR Tools	x	x	x	x
Battery Type/Op Time	Li-Ion/4 hours			
Weight	TBD			
Warranty	2 Years (warranty extended to 2 years when camera is registered)			

‡ Professional analytics tools include DeltaT functionality and multiple movable spots



10-Year Detector Protection  
5-Year Battery  
2-Year Parts & Labor



## Infrared Training Center

Get the most out of your FLIR investment and advance your career with world-class instruction through the Infrared Training Center. An ITC certificate is written proof of your expertise in operating your camera and interpreting the thermal information it provides.

For full course descriptions, updated schedules, and more information, visit [www.infraredtraining.com](http://www.infraredtraining.com) or call 1.866.872.4847.



**INFRARED  
TRAINING  
CENTER**



### BOSTON

FLIR Systems, Inc.  
25 Esquire Road  
North Billerica, MA 01862  
USA  
PH: +1 866.477.3687  
PH: +1 978.901.8000

[www.flir.com](http://www.flir.com)  
NASDAQ: FLIR

### PORTLAND

Corporate Headquarters  
FLIR Systems, Inc.  
27700 SW Parkway Ave.  
Wilsonville, OR 97070  
USA  
PH: +1 866.477.3687

### SANTA BARBARA

FLIR Systems, Inc.  
70 Castilian Dr.  
Goleta, CA 93117  
USA  
PH: +1 866.477.3687

### CANADA

FLIR Systems, Ltd.  
5230-125 South Service Rd.  
Burlington, ON L7L 5K2  
Canada  
PH: +1 800.613.0507

Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited. Specifications are subject to change without notice. For the most up-to-date specs, visit our website: [www.flir.com](http://www.flir.com). ©2010 FLIR Systems, Inc. All other brand and product names are trademarks of FLIR Systems, Incorporated. Imagery used for illustration purposes only. 1007775 12/10