

DESCRIPTION

Flo-tech digital displays are designed for use with Flo-tech Activa, Ultima and Classic Flow Meters, but can be used with any frequency or analog output flow meter. The displays are powered by an AC or DC power source, and can be configured with a variety of communication protocols and units of measure. Basic functions include flow, temperature and pressure indication, totalization, alarm processing, and process control.

In addition to flow rate frequency signals derived from meter, the F6600/F6650 models accept inputs from switch contacts and outputs from CMOS or TTL circuits. These displays provide 6 different indications including counter A, counter B, counter C, rate, rate maximum, and rate minimum. Annunciators indicate which variable is being displayed.

FEATURES

F6700/F6750

- AC or DC power
- Five digit rate and total display
- 4...20 mA or 0...10V DC input
- Built-in transmitter power supply
- Three expansion card slots
- NEMA 4X/IP 65 rated enclosure
- CE compliant

F6600/F6650

- AC or DC power
- Six digit rate and total display
- Frequency input
- Built-in transmitter power supply
- Three expansion card slots
- NEMA 4X/IP 65 rated enclosure
- CE compliant



APPLICATIONS

Flo-tech digital displays are suitable for several flow metering applications where remote flow monitoring is required. Typical applications include:

- Hydraulic diagnostics, monitoring and test stands
- Mobile construction and marine equipment
- General industrial processes

PROGRAMMING

When ordered with a flow meter, flow meter data is configured and programmed at the factory. Replacement units can be programmed in the field via the front panel display, or at the factory if the flow meter serial number is provided.

OPERATION

Frequency or analog output signals generated from a flow metering device are interpreted by the display, and then calculated to provide a volumetric flow rate based on the flow meter properties. Flow rate units are scaled based on the configuration of the display. For flow sensor arrays that are configured with an additional pressure and/or temperature sensors, the digital displays have available inputs to accept and display these parameters.

Flow rate, pressure and temperature readings can be transmitted through the various communication protocols.

ADDITIONAL PRODUCTS

Part Number	Description	Use
F6542	Form C relay module	The optional plug-in card requires customer installation and setup. Use this feature with a display that includes a serial communication card (RS-232 or EIA-485).
F5140	K-factor scaler	Must be used with Flo-tech flow meters configured with frequency output and sizes SAE 8, G1/4 or equivalent.


NOTE: For additional set point alarm options, consult the factory.

Expansion Cards

Analog Output	A linear DC output signal card can be set up to provide a 4...20 mA, 0...20 mA or 0...10V DC signals and can be scaled independent of the input range.
Communication	Optional plug-in cards to facilitate digital communications. See "Model Number" on page 4 for options.
Setpoint Alarms	Select from dual FORM-C relays (5 Amp), Quad Form-A relays (3 Amp) or either sinking or sourcing quad open collector logic outputs.

NOTE: The analog output and communication cards will be installed at the factory at the time of order. They may be installed at a later date if ordered separately. The setpoint alarm cards are available for customer installation and configuration only.

DIMENSIONS

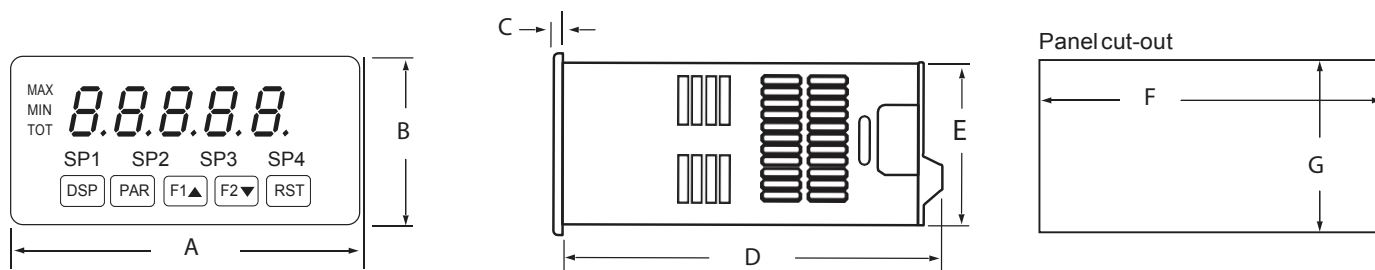

A*	B*	C	D	E	F	G
3.80 in. (96.5 mm)	1.95 in. (49.5 mm)	0.10 in. (2.5 mm)	4.10 in. (104.1 mm)	1.75 in. (44.5 mm)	3.62 in. (92.0 mm)	1.77 in. (45.0 mm)

*F6700/F6750 is shown, dimensions are the same for F6600/F6650

SPECIFICATIONS

F6700/F6750

Display	5-digit, 0.56 in. sunlight-readable red LED	
Power	AC	85...250V AC, 50/60 Hz, 15 VA
	DC	11...36V DC, 11 W
A/D Converter	16-bit resolution	
A/D Conversion Rate	20 readings/sec	
Display Update Rate	1...20 updates/sec	
Sensor Inputs	4...20 mA or 0...10V DC	
Transmitter Power	24V DC, $\pm 5\%$, regulated 50 mA max	
Totalizer Time Base	Second, minute, hour or day	
Total	9 digits, display alternates between high order and low order readouts	
Linearization Data Point Pairs	Selectable from 2...16	
Operating Temperature	32...122° F (0...50° C); 32...113° F (0...45° C) with all three plug-in cards installed	

F6600/F6650

Display	6-digit, 0.56 in. sunlight-readable red LED	
	Rate	5-digit max, $\pm 0.01\%$ accuracy
	Counter	8-digit max, >6 digits alternates between high order and low order
Power	AC	85...250V AC, 50/60 Hz, 18 VA
	DC	11...36V DC, 14 W
Sensor Power	12V DC, $\pm 10\%$, 100 mA max, short circuit protected	
Inputs	Magnetic pickup	
	Frequency Range	0.01 to 34 K Hz
	Trigger Sensitivity	80 mV p-p
	Over Voltage Protected	± 40 V peak
Operating Temperature	32...122° F (0...50° C); 32...113° F (0...45° C) with all three plug-in cards installed	

MODEL NUMBER

Frequency Input

	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Frequency Input				
MODEL				
Digital Display with AC Power	F6600			
Digital Display with DC Power	F6650			
OUTPUT				
None		X		
4...20 mA		A		
0...20 mA		B		
0...10V DC		C		
COMMUNICATIONS				
None			X	
RS-232			A	
EIA-485			B	
Modbus			C	
Profibus			D	
DeviceNet			E	
DISPLAY UNITS				
US GPM				G
LPM				L
RPM				R

Analog Input

	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Analog Input				
MODEL				
Digital Display with AC Power	F6700			
Digital Display with DC Power	F6750			
OUTPUT				
None		X		
4...20 mA		A		
0...20 mA		B		
0...10V DC		C		
COMMUNICATIONS				
None			X	
RS-232			A	
EIA-485			B	
Modbus			C	
Profibus			D	
DeviceNet			E	
DISPLAY UNITS				
US GPM				G
LPM				L
RPM				R
PSI				P
BAR				B
KG/CM2				K
Mpa				M
°F				F
°C				C

Control. Manage. Optimize.

Flo-tech is a registered trademark of Badger Meter, Inc. Other trademarks appearing in this document are the property of their respective entities. Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding contractual obligation exists. © 2016 Badger Meter, Inc. All rights reserved.

www.badgermeter.com

The Americas | Badger Meter | 4545 West Brown Deer Rd | PO Box 245036 | Milwaukee, WI 53224-9536 | 800-876-3837 | 414-355-0400
 México | Badger Meter de las Americas, S.A. de C.V. | Pedro Luis Ogazón N°32 | Esq. Angelina N°24 | Colonia Guadalupe Inn | CP 01050 | México, DF | México | +52-55-5662-0882
 Europe, Middle East and Africa | Badger Meter Europa GmbH | Nurtinger Str 76 | 72639 Neuffen | Germany | +49-7025-9208-0
 Europe, Middle East Branch Office | Badger Meter Europe | PO Box 341442 | Dubai Silicon Oasis, Head Quarter Building, Wing C, Office #C209 | Dubai / UAE | +971-4-371 2503
 Czech Republic | Badger Meter Czech Republic s.r.o. | Mařikova 2082/26 | 621 00 Brno, Czech Republic | +420-5-41420411
 Slovakia | Badger Meter Slovakia s.r.o. | Racianska 109/B | 831 02 Bratislava, Slovakia | +421-2-44 63 83 01
 Asia Pacific | Badger Meter | 80 Marine Parade Rd | 21-06 Parkway Parade | Singapore 449269 | +65-63464836
 China | Badger Meter | 7-1202 | 99 Hangzhong Road | Minhang District | Shanghai | China 201101 | +86-21-5763 5412
 Switzerland | Badger Meter Swiss AG | Mittelholzerstrasse 8 | 3006 Bern | Switzerland | +41-31-932 01 11