

MTL2215 SWITCH-OPERATED RELAY

IS-output

The MTL2215 enables either one or two separate IS circuits in a hazardous area to be relay-contact controlled by a single on/off switch or logic signal in a safe area. Applications include the calibration of strain-gauge bridges, changing the tone of an IS sounder, the testing of IS fire alarms, and the transfer of safe-area signals into an annunciator with IS input terminals not segregated from each other. The output-relay contacts are certified as 'non-energy-storing' apparatus, and can be connected to any IS circuit without further certification, provided that separate IS circuits are such that they would still remain safe if connected together.

SPECIFICATION

See also 'Common specification'

Number of channels

One, fully floating

Location of control circuit

Safe area

Input/output characteristics

Relay energised if $<27k\Omega$ or $<1V$ applied

Relay de-energised if $>54k\Omega$ or $>2V$ applied (50V maximum)

Hysteresis, nominal: $16k\Omega$ or $0.6V$

Power supply failure protection

Relay de-energised if supply fails

Response time

50ms, nominal

Contacts (suitable for connection to IS circuits)

2-pole changeover

Contact rating (non-IS applications)

250V,5A,500VA (ac), resistive loads, reactive loads must be suppressed

250V,5A,250W (dc), resistive loads, reactive loads must be suppressed

Contact life expectancy (non-IS applications)

2×10^5 operations at maximum load

LED indicator

ON when relay energised

Consumption

0.9 to 1.4W (ac versions)

60mA (24V dc version)

Ambient temperature limits

-20 to +55°C (all versions, close packed)


-20 to +60°C (all versions, at least 5mm apart)

-40 to +80°C (all versions, storage)

Safety description (each channel)

Non-energy-storing apparatus: relay contacts may be connected to any certified IS circuit in Zone 0 without further certification

Note: The 2-pole changeover contacts may be used to switch separate IS circuits only if these remain intrinsically safe when interconnected, since the two sets of relay contacts are not segregated from each other.

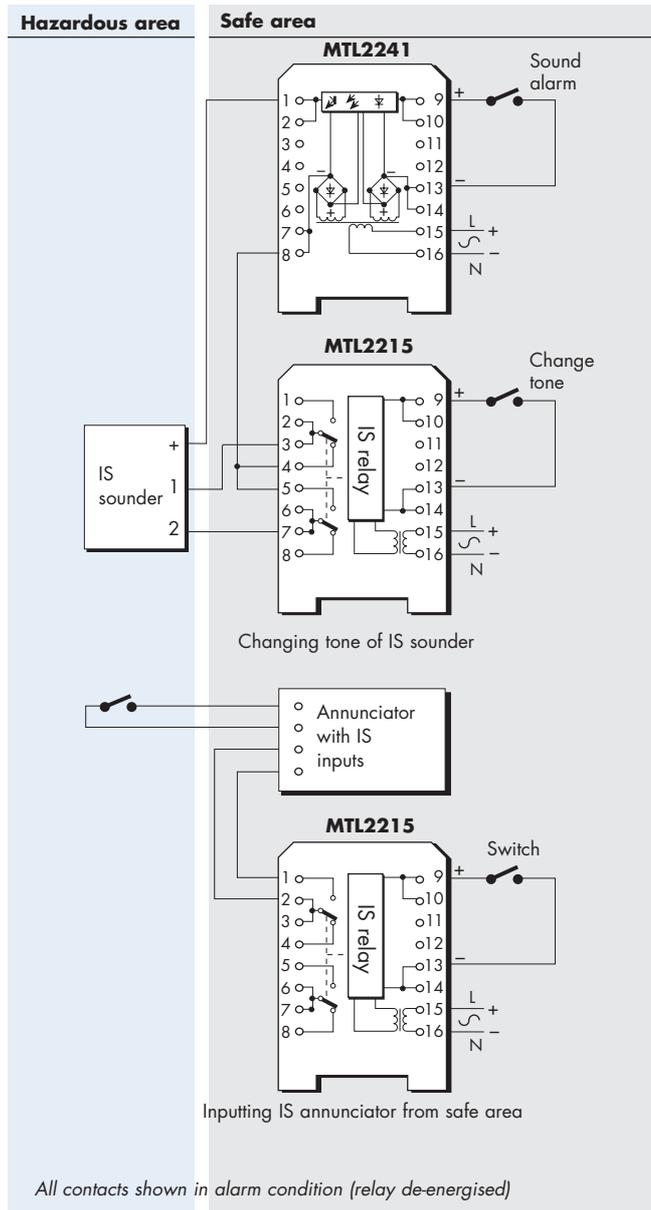

EUROPE (EMEA)
AMERICAS
ASIA PACIFIC
E-mail: enquiry@mtl-inst.com

Tel: +44 (0)1582 723633
Tel: +1 603 926 0090
Tel: +65 487 7887

Fax: +44 (0)1582 422283
Fax: +1 603 926 1899
Fax: +65 487 7997

Web site: www.mtl-inst.com