



MB-QZ - MOUNTING BRACKET

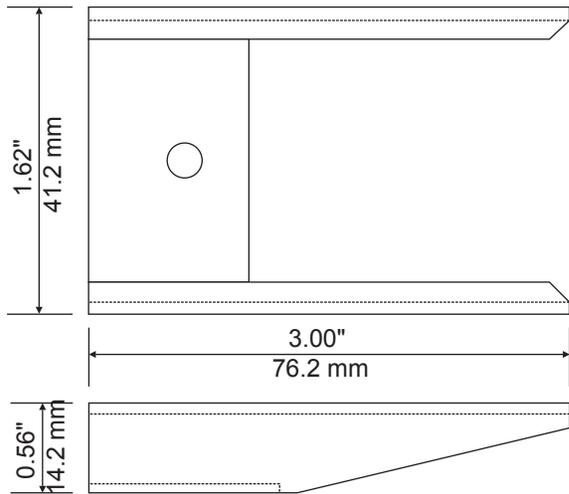

QZ02L-SS-01-SD VELOCITY/LEVEL SENSOR

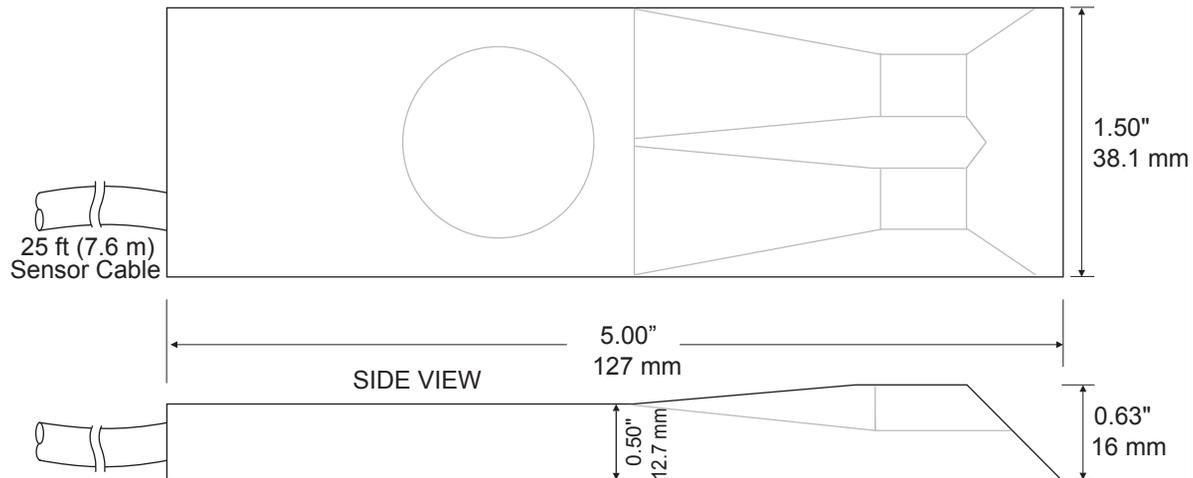

QZ02L FLOW VELOCITY/LEVEL SENSOR SPECIFICATIONS:

Minimum Velocity: 0.1 ft/sec (0.03 m/sec)
 Maximum Velocity: 20 ft/sec (12.2 m/sec)
 Minimum Head: 1.0 in. (25.4 mm)
 Maximum Head: 15 ft. (4.57 m)
 Operating Temperature: 5 to 175°F (-15 to 80°C)
 Exposed Materials: 316 Stainless Steel, epoxy resin, polyurethane
 Sensor Cable: 25 ft (7.6 m) submersible polyurethane jacket, shielded, 3-coaxial
 Hazardous Rating: CSA rated Intrinsically Safe Class I, Groups C,D, Class II, Groups E,F,G with optional Intrinsic Safety Barrier

NOTES:

1. Measures fluid velocity and fluid level.
2. Install in the invert of a horizontal pipe or channel.
3. Sensor clips into Mounting Bracket.
4. Optional continuous cable lengths of 50 ft (15 m) or 100 ft (30 m).
5. Refer to Manual for detailed installation instructions.

GREYLINE
instruments inc.

APPROVAL	DATE	QZ 02L-SS-01-SD Flow Velocity and Level Sensor
	01/12/17	
CHECKED	DATE	SCALE SIZE DWG. NO.
		N.T.S