

COMMTEST220 AND COMMTEST240

Portable Data Collectors

Datasheet

Cordant™

109M0792 Rev. AB

Description

Bently Nevada™ Scout™COMMTEST220 and COMMTEST240 are portable data analyzer solutions designed to monitor machinery in non-hazardous environments. These small form-factor, rugged devices take vibration recordings and upload the collected data for detailed analysis in System 1.

This is a two-part solution. The COMMTEST data acquisition module uses Bluetooth to communicate with a wireless, industrial handheld device running the S1 Collector app.

Vibration recordings are viewed and stored on the **handheld device**. The handheld runs the Android OS or Apple iOS, so you can also use it like any smartphone or tablet to take pictures and video, send text messages, check email, make phone calls, track your location, create SOS alerts, and run other enterprise apps.

The high performance **data acquisition module** (Hardware ID: 109M2380) provides long battery life, yet is light & rugged. It hangs out-of-the-way on a shoulder strap, allowing you to focus on your job and move safely between machines.

The COMMTEST220 can sample two sensor channels simultaneously, while the COMMTEST240 supports up to four channels. Both also support tachometer or Keyphasor triggering. These data acquisition modules provide up to ten hours of continuous use, while supporting an F_{max} up to 80 kHz and 12,800 lines of spectral resolution.

The **System 1 software**, paired with COMMTEST220 and COMMTEST240, enables you to track all of your machinery using a single enterprise monitoring system. Use System 1 to prepare routes, analyze data, detect long-term trends, and set and detect alarms. Then transfer the routes between System 1 and your COMMTEST device using WiFi, file transfer, cellular network, or a USB cable.




Baker Hughes 

Hardware Features

- Battery life of 10 hours allows the data collector to run all day.
- Five year warranty.
- Rugged, water, and dust resistant (IP-65), drop-tested.
- Easy to carry: lightweight handheld unit, shoulder strap for data collector, keepers for sensors.
- Safety breakaways on both shoulder strap and sensor cables.
- Upgradable industrial handheld smartphone.
- Handheld Push-to-Talk(PTT) button is configured to start measurements (where available).
- Up to four channel simultaneous recordings (including on-route).
- COMMTEST240 supports Triaxial sensors.
- Up to 12,800 lines of spectral resolution, 80 kHz F_{max} .
- Supports accelerometer, velocity, displacement, and voltage-output sensors of AC and DC coupling types.

- Modal Impact Testing (requires optional instrumented hammer).
- Set machine speed from spectral peak.

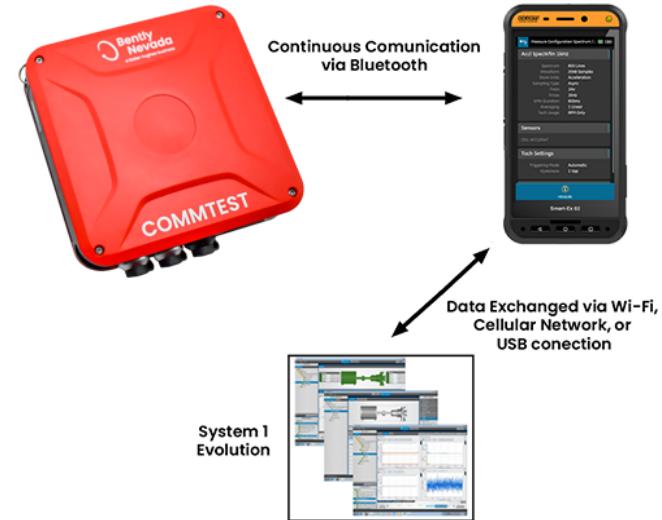

The COMMTEST portable connects via Bluetooth to the handheld, which you can then sync with System 1.

Software Features

- Seamless on-and off-route data collection.
- Route overview & easy route navigation.
- Fast sensor settling and data collection.
- Patented 6Pack time-saving measurement type.
- Synchronous sampling, peak demod, and bump test.
- Coast-down, run-up, and interval capture support.
- Custom note and numeric data entry.
- Rotor Balancing, dual plane, reports transferred to System 1.
- Data quality warnings and easy-to-understand alarm annunciation.
- Supports operator driven reliability (ODR).
- Cross Channel Phase measurement & reports.
- Cross Channel FRF measurement & export UFF.

Data Collector Specifications

Sensors

Sensor input Simultaneous sampling	COMMTEST220: 2 channels. COMMTEST240: 4 channels.
Compatible sensor types	Accelerometer, velocity, displacement, and voltage.
AC coupled range	16 V peak-peak. Allows for ± 8 V sensor output swing (± 80 g).
DC coupled ranges	0 to 20 V, -10 to 10 V, -20 to 0 V
Connectors	2 x LEMO connectors for CH1 & CH2+ 1 X LEMO connector for Tach/Keyphasor COMMTEST240 includes a CH 2.4 breakout cable.
Analog to digital conversion	24-bit ADC
Sensor excitation current	0 mA or 2.2 mA (configurable), 24 V maximum 2.2 mA powers IEPE/ICP-type sensors
Sensor detection	Measures sensor bias voltage. Warns if short circuit or not connected.

Tachometer

Optional laser Tach	Laser sensor powered by Portable Data Collector. Triggers when beam on reflective tape range 10 cm to 2 m. Speed 6 to 250 krpm.
Other sensor types supported	Contact, TTL Pulse, Keyphasor
Power supply to sensor	5 V, 40 mA
Input Impedance & max values	100 K Ω ± 28 V max
Waveform display	± 20 V range
Threshold	± 20 V range ± 0.4 V accuracy
Auto-threshold mode	Signal ≥ 3 V pk-pk Machine speed ≥ 60 rpm (1 Hz) Settles within < 15 s
Hysteresis	0.2 V to 2.5 V user configurable
Speed range	Minimum: 3 rpm (0.05 Hz) Maximum: 1,200,000 rpm (20 kHz)
Signal pulse width	10 μ s minimum 2% duty cycle (for auto-threshold)
Accuracy	$\pm (0.1\% + 1$ cpm) for speeds up to 5 kHz (300 kcpm). $\pm (0.3\%)$ for speeds above 5 kHz (300 kcpm).

Parameter Indication

Dynamic signal range	> 95 dB typical at 400 line resolution
Harmonic distortion	Less than -70 dB typical. Other distortions and noise are lower.
Units	g or m/s ² in/s or mm/s mil or mm or μ m peak, or peak-peak, or RMS
Magnitude & cursors	Overall value: RMS, derived pk, derived pk-pk Dual cursors Digital readouts on chart
Base accuracy	For AC signal: $\pm 1\%$ of readings For DC level: $\pm 1\%$ of full scale (1% is approximately 0.1 dB)
High frequency attenuation	≤ 0.1 dB > 100 Hz to 10 kHz ≤ 3 dB > 10 kHz to 40 kHz Attenuation tolerances are in addition to base accuracy.
AC coupling attenuation	≤ 0.1 dB 10 Hz to < 100 Hz ≤ 3 dB 1 Hz to < 10Hz
Attenuation due to Integration	≤ 0.1 dB 10 Hz to < 100 Hz ≤ 1.5 dB 1 Hz to < 10 Hz. Values apply to single integration (acceleration to velocity). Double the values for double integration (acceleration to displacement).

Spectrum Display

Fmax ranges	25; 50; 100; 125; 150; 200; 300; 400; 500; 600; 800; 1,000; 1,200; 1,600; 2,000; 2,500; 3,000; 4,000; 5,000; 6,000; 8,000; 10,000; 15,000; 20,000; 30,000; 40,000; 60,000; 80,000 Hz or equivalent. CPM values or orders-based from 1X to 999X.
-------------	---

Fmin possible range	0 to F _{max} . Instrument zeroes all spectral lines below F _{min} .		
Resolution (Spectral lines)	400; 800; 1,600; 3,200; 6,400; 12,800 lines		
Channels	220 max lines	240 max lines	
1	6,400	12,800	
2	3,200	6,400	
3 or 4	N/A	3,200	
Frequency scale	Hz, CPM, Orders. Linear scale with zooming.		
Amplitude scale	Acceleration, velocity, displacement. Linear auto scaling.		
Window shapes	Hanning, Rectangular		
Overlap	(0, 12.5, 25, 37.5, 50, 62.5, 75, 87.5) % Dependent on F _{max} and number of lines		
Number of averages	1, 2, 4, 8, 16, 32, 64, 128 Increases sampling time proportionally		
Averaging types	Linear, exponential, peak hold		
Demodulation bandwidths	23 bandwidth options from 125 Hz to 1,250 Hz and up to 16 kHz to 20 kHz. Peak demod: 500Hz-40kHz, 1-40kHz, 2-40kHz, 5-40kHz		
6Pack	Up to 40 kHz & 3,200 lines (1 channel). Up to 20 kHz & 1,600 lines (2-3 channels). Spectrum and waveform for each of low-frequency, high-frequency, demodulation		

Waveform Display

Number of samples	1,024; 2,048; 4,096; 8,192; 16,384; 32,768		
	Channels	220 max samples	240 max samples
	1	16,384	32,768
	2	8,192	16,384
	3 or 4	N/A	8,192

Time scale	10 ms to 256 seconds or orders based from 1 to 999 revs
------------	---

Advanced Analysis

Cross channel spectrum	1 Reference and up to 3 other sensors Calculates Coherence and Frequency Response Function (FRF)
Modal Impact Testing	CH1 for hammer, up to 3 response channels, \leq 10 kHz Calculates Coherence and FRF — Accelerance, Mobility, and Compliance
UFF Export	Export of FRF data in Universal File Format, for import into Modal Analysis/ODS software.

Balancing

Planes	2 planes, 2 sensors
Speed Range	3 to 12,000 RPM
Measurement Type	Acceleration, Velocity, Displacement
Weight modes	Angle 0° to 360° Fixed Positions
Remove Trial Weights	Yes/No Automatic recalculation

Storage	Balance jobs stored on handheld and transferable to System 1
---------	--

Communication

Bluetooth	BT 4.0 Classic (s/n \leq 101599) BT 5.0 BLE (s/n \geq 101600)
-----------	--

Battery and Charger

Battery type	Custom Lithium Ion pack, 7.4 V, 3920 mAh. Not user accessible but factory replaceable.
Operating Time	10 hours typical on-route data collection
Charger type	Internal charging, automatic control. External power pack 12 V DC, 3 A output.
Charge rate	2 A nominal 3 hours for complete charge.

Mechanical

Size	5.1" W x 5.1" L x 1.4" H (130 mm W x 130 mm L x 35 mm H)
Weight	1.3 lb \approx 590g

Environmental Limits

Operating temperature	-4°F to 140°F (-20 to 60°C)
Ambient temperature for charging battery	32°F to 77°F (0°C to 25°C)

Storage temperature & humidity	-4°F to 140°F (-20°C to 60°C), 95% relative humidity. If storage exceeds one month: up to 95°F (35°C), 85% relative humidity.
Ruggedness drop & sealing	Drop spec MIL-STD-810F-516.5-IV 26 drops at 4' (1.2 m) onto concrete IP65

S1 Collector App

Operating System	Android 5.1 to 12 iOS 12 to 16 (with s/n ≥ 101600 only, requires BT 5 BLE).
Languages	Chinese, English, Finnish, German, Japanese, Russian, Spanish, Turkish

Cyber Security

The COMMTEST220 and COMMTEST240 solutions include an industrial handheld device that runs the Android or Apple iOS operating system and uses USB, cellular, Bluetooth and Wi-Fi for communication. These solutions have features that reduce but do not eliminate cyber security risks.

We strongly recommend implementing additional cyber security protections such as:

- Controlling user access
- Scanning for viruses
- Applying timely updates
- Using mobile device management software



The recommended measures are at your discretion and responsibility. Some residual risk may remain.

For details, see the *SCOUT200_Series Cyber Security Hardening Guideline* (document 131M1304) at BNTechSupport.com.

App Updates

The Bently Nevada development team periodically updates the S1 Collector App with new features and enhancements. Built into the app is the new firmware to also automatically update the SCOUT200 data collector. These updates are free to all SCOUT200 owners who have a current Maintenance and Support agreement (M&S) for their System 1 software.

The updates can be obtained from either of these locations:

1. Flexnet Licensing Portal > System 1 > System 1 Collector App.
2. Google Playstore > Search "S1 Collector"

Handheld Specifications Summary



A handheld device is not included in the COMMTEST kit. To order an Android device, add it as an accessory item, or obtain an appropriately rated device directly from the supplier.



For self-supplied handheld devices, we cannot guarantee COMMTEST200 compatibility with every make/model or version of Android. Contact BN TechSupport for a list of tested models, or to request a test.

	Smart Ex 02 DZ2	Tab Ex D2 & DZ2
Device Image		
Display & Touch	5", Gorilla glass, glove touch & wet mode	8" 1920 x 1200, 480 nit, glove touch & wet mode
Wireless & GPS	4G/LTE dual SIM, WiFi 2.4 & 5 GHz, BT 4.2, NFC, GPS	WiFi 2.4 & 5 GHz, BT 5.0, NFC, GPS
Cameras	12 MP rear, 5 MP front	13 MP rear, 5 MP front
OS	Android 11 or later	Android 11 or later
CPU	Qualcomm Snapdragon 450	Exynos 9810, 2.7 GHz, Octa-core
Memory	3 GB RAM, 32 GB ROM up to 128 GB microSD	4 GB RAM, 48 GB internal, up to 1 TB microSD
Battery	Replaceable Li-Ion 4400 mAh	Li-Ion 3.8V, 5050 mAh, up to 11 hrs
Size & Weight	163 x 82 x 22 mm, 380 g	214 x 127 x 10 mm, 610 g
Ruggedness	IP68, MIL-STD-810G, -20 to 60°C	IP68, 1.2m drop, -20°C to +55°C
Warranty	3 years	3 years
Complete Specs, Accessories	www.ecom-ex.com	www.ecom-ex.com

	Smart Ex 02 DZ2	Tab Ex D2 & DZ2
SCOUT200 Compatibility		<p>These handhelds are WiFi models, so they do not support USB Tethering. This prevents them from using USB Direct comms with System 1.</p> <p>Available comms methods: WiFi, File mode, Remote comms.</p> <p>To use USB Tethering, order WWAN version direct from Pepperl & Fuchs.</p>



Numerous accessories are available for these handhelds, direct from each handheld manufacturer (e.g. charging stations, belt-clips for the smartphones, and cases for the tablets). You can find the accessories pages on the handheld manufacturers websites.



If Apple iOS handhelds are preferred, these are not available through Bently Nevada and should be purchased by the end user. If comms via USB tethering are used, the handheld must have an active SIM card installed (i.e. a WiFi-only iOS tablet cannot communicate via USB cable).

Compliance and Certifications



This section applies only to the Data Collector, not the handheld device.

This device complies with Industry Canada license-exempt RSS standard(s) and complies with part 15 of the FCC Rules, Class A device. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.



Changes or modifications not expressly approved by Bently Nevada could void the user's authority to operate the equipment.



This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.



For the detailed listing of country and product-specific approvals, refer to the [Approvals Quick Reference Guide \(108M1756\)](#).

For additional technical documentation, please log in to [bntechsupport.com](#) and access the Bently Nevada Media Library.

RED/EMC	EN 61000-6-2 EN 61000-6-4 EN 300 328 EN 301 489-1 EN 301 489-17 EN 61326-1 2014/53/EU 2014/30/EU
ROHS	2011/65/EU
India - Battery EPR Marking	GE Oil & Gas India Private Limited EPR Certificate No.: 1.1595372902047E+20



The overall hazardous system rating is defined by the minimum rating of the data collector, industrial handheld, and accessories.

Ordering Information



For the detailed listing of country and product-specific approvals, refer to the [Approvals Quick Reference Guide \(108M1756\)](#).

For additional technical documentation, please log in to [bntechsupport.com](#) and access the Bently Nevada Media Library.

COMMTEST220-AA

A: Data Collector Approval Options

00	None	
Part Number	Description	Qty
	S1 Collector app, digital delivery (see App Updates on page 6)	1
	COMMTEST220Data Collector	1
184M3664-01	Assembly of AC Power Adapter, Tie Cable & Label	1
PLUS0230	Category A power plug (USA / Canada)	1
PLSA0241	Category D power plug (South Africa / India)	1
PLAU0228	Category M power plug (Australia / New Zealand / China)	1
PLHK0245	Category G power plug (Hong Kong / UK)	1
PLEU0229	Category C Power plug (Europe)	1
AM3100T2-Z0 or 200350*	Accelerometer, top exit	1

Part Number	Description	Qty
AS3100S2-Z0 or 200350*	Accelerometer, side exit	1
151M8244-01	Accelerometer cable, coiled, safety breakaway	2
113M5585	Accelerometer magnetic base	2
109M2385-012	BNC to silver-LEMO cable. Connects rack buffered outputs to CH1/CH2 inputs.	2
110M8172-012	BNC to black-LEMO cable. Connects rack buffered Keyphasor to Tach input.	1
117M1446	Belt Clip	1
109M2384-01	Neck strap with Sensor Keeper	1
112M4551	Hard carrying case	1
109M1269	SCOUT200 Series User Guide	1
109M1270-01	SCOUT200 Series Quick Start Guide	1

* Kit items with multiple part numbers listed have limited regional availability due to certification requirements.



The COMMTEST220 kit does NOT include a handheld device, nor a System 1 software license. They are ordered separately under Optional Accessories below.



Metrology certification can be requested when an order is placed, however this service is charged. Standard test data can be requested for free, but is not evidence of calibration.

To request a periodic metrology calibration, contact [Bently Nevada Tech Support](#).

COMMTEST240-AA

A: Data Collector Approval Options		
00	None	
Part Number	Description	Qty
	SI Collector app, digital delivery (see App Updates on page 6)	1
	COMMTEST240 Data Collector	1
184M3664-01	Assembly of AC Power Adapter, Tie Cable & Label	1
PLUS0230	Category A power plug (USA / Canada)	1
PLSA0241	Category D power plug (South Africa / India)	1
PLAU0228	Category M power plug (Australia / New Zealand / China)	1
PLHK0245	Category G power plug (Hong Kong / UK)	1
PLEU0229	Category C Power plug (Europe)	1
AM3100T2-Z0 or 200350*	Accelerometer, top exit	3
AS3100S2-Z0 or 200350*	Accelerometer, side exit	1
151M8244-01	Accelerometer cable, coiled, safety breakaway	4
113M5585	Accelerometer magnetic base	4
109M2385-012	BNC to silver-LEMO cable. Connects rack buffered outputs to CH1/CH2 inputs.	2

Part Number	Description	Qty
110M8172-012	BNC to black-LEMO cable. Connects rack buffered Keyphasor to Tach input.	1
113M9350	Channel 2-4 breakout cable	1
117M1446	Belt Clip	1
109M2384-01	Neck strap with Sensor Keeper	1
112M4551	Hard carrying case	1
109M1269	SCOUT200 Series User Guide	1
109M1270-01	SCOUT200 Series Quick Start Guide	1

* Kit items with multiple part numbers listed have limited regional availability due to certification requirements.



The COMMTEST240 kit does NOT include a handheld device, nor a System 1 software license. They are ordered separately under Optional Accessories below.



Metrology certification can be requested when an order is placed, however this service is charged. Standard test data can be requested for free, but is not evidence of calibration.

To request a periodic metrology calibration, contact [Bently Nevada Tech Support](#).

Optional Accessories

Hand Held Devices	
146M8212-01	Smart-Ex 02 DZ2 (North America & Europe)
175M2586-01	Tab-Ex D2 North America

Hand Held Devices	
145M3278-01	Tab-Ex DZ2 North America
146M8220-01	Tab-Ex DZ2 Europe
 To obtain a handheld device suitable for a location not listed above, contact a handheld device distributor within the destination country.	
Other Accessories	
3071/01	System 1 software and license
108M4069	Laser Tach powered by COMMTEST220 and COMMTEST240. Order cable separately.
CBL50216	5-meter cable for laser Tach 108M4069.
122M9408	Monarch Compact Smart Laser Sensor (CSLS). Higher powered (3 mW) but larger size (2.6" x 2.4" x 2"). Order cable separately.
125M2099-01	Cable for CSLS laser, 1.5 m
113M5529-01	Reflective tape One roll, 60 cm (23.7 in)
VBMR0222	Pair of safety rings for attaching strap to data collector
138M7749	Accelerometer cable, 4 ft, straight, safety breakaway
TP500	Accelerometer, top exit, 500 mV/g, 10 g pk, 0.2 Hz - 14 kHz

Accessory Kits

Balancing Kit - 161M0958

Part Number	Description	Qty
113M5529-01	Reflective tape One roll, 60 cm	1
LASA0315	Laser Tach Kit Zone 2 rated	1
CBL50216	Laser cable Five meters	1
MAGA0063	Laser magnetic stand	1
159M9583*	Sensor extension cable, 5 m	2
CBBL0026	Carrying case for the kit	1

* Depending on availability, this cable may be substituted with the CB5G0024 and CB5R0025 cables and two 161M2913 adapters.

Zone 2 Laser Tach Kit - LASA0315

Part Number	Description	Qty
108M4064	Laser Tacho Holder	1
108M4066	Circlips - 20Mm Stainless	1
108M4067	Arp115 Oring	2
108M4069	Laser Tach Zone 2 rated	1

Impact_Hammer_Kit - AA-BB-CC-DD-EE-FF**A: 500lbf pk, 10mV/lbf, 0.3lbm (285570-01)**

00	None
01	Hammer Included

B: 1000lbf pk, 5mV/lbf, 0.3lbm (285570-02)

00	None
01	Hammer Included

C: 5000lbf pk, 1mV/lbf, 2.4lbm (285570-03)

00	None
01	Hammer Included

D: N/A**E: N/A****F: N/A****Triax Sensor Kits**

Triaxial sensor kits are certified for hazardous area use in limited regions (NAM, EU, etc.). Other regions may need to source locally. Contact TechSupport for suggested manufacturer part numbers.

157M0806-01

Part Number	Description
156M6189	Triaxial sensor, 100 mV/g \pm 20%, 0.5 Hz .. 5 kHz, 8 μ g/ \sqrt Hz noise @ 10Hz
157M0852-01	Cable for SCOUT200 to triax 156M6189, 1.5 m, straight, safety breakaway
156M6204	Magnet, 2 pole, 38 mm diameter, 32 mm high, 25 kg pull, 1/4-28 female thread

157M0809-01

Part Number	Description
155M3055	Triaxial sensor, 100 mV/g \pm 10%, 0.6 Hz .. 10 kHz, 27 μ g/ \sqrt Hz noise @ 10 Hz
156M6180	Cable for SCOUT200 to triax 155M3055, 1.5 m, straight, safety breakaway
154M1355	Magnet, 2 pole, 35 mm diameter, 22 mm high, 23 kg pull, 1/4-28 female thread, triax alignment notch

Language Specific Warning Labels

110M9913	Magnet base label
110M9914	Sensor keeper side label
110M9915	Sensor keeper front label
111M7144	Hard carrying case label

Copyright 2025 Baker Hughes Company. All rights reserved.

Bently Nevada, a Baker Hughes Company
1631 Bently Parkway South, Minden, Nevada USA 89423
<https://bnTechsupport.com>