

### Features

- 20Hz processing speed
- High speed download
- Low cost
- Programmable start time
- Reusable
- Miniature size
- User-friendly
- Reads in microstrain and engineering units
- Versatile inputs for many applications

### Applications

- Strain gauge
- Load cells
- Pressure transducers
- Torque sensors
- Load bolts
- Position transducers
- Replace costly strip chart recorders

The Bridge120 is a battery powered, miniature, stand alone bridge/strain recorder.

The device features a 20Hz processing speed and a real-time clock module. This easy-to-use device can measure and record up to 32,767 measurements per channel. The storage medium is non-volatile solid state memory, providing maximum data security even if the battery becomes discharged. The device can be started and stopped directly from your computer and its small size allows it to fit almost anywhere. The Bridge120 makes data retrieval quick and easy. Simply plug it into an empty COM or USB port and our user-friendly software does the rest.




### MadgeTech Data Recorder Software

Reports strain data in an easy to use graph.

The Windows®-based software package allows the user to effortlessly collect, display and analyze data. A variety of powerful tools allow you to examine, export, and print professional looking data with just a click of the mouse.

Click [MadgeTech Software](#) for more information or to download the software.

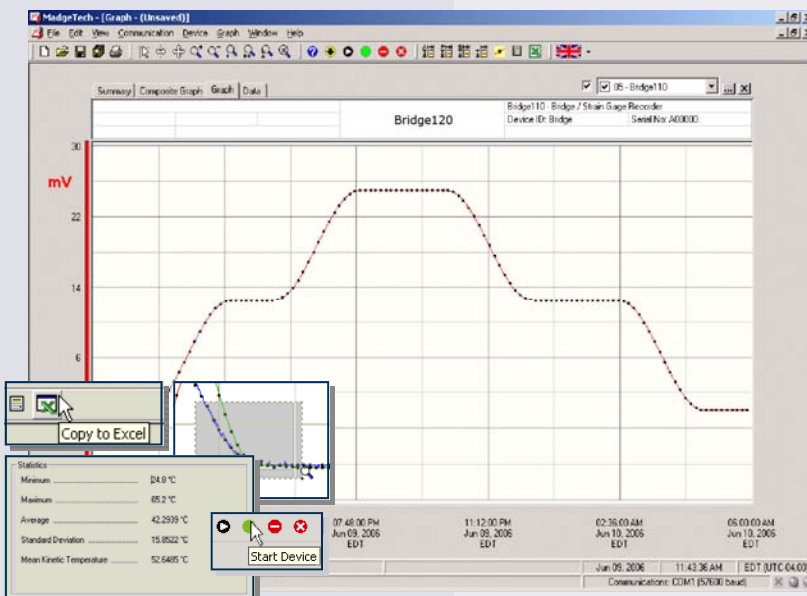

## BRIDGE120 SPECIFICATIONS\*

<b>Nominal Range:</b>	±10 mV	±25 mV	±100 mV	±1000 mV
<b>Measurement Range:</b>	±15 mV	±37.5 mV	±150 mV	±1200 mV
<b>Resolution:</b>	1 µV	2.5 µV	5 µV	50 µV
<b>Calibrated Accuracy:</b>	±0.25 %	±0.10 %	±0.05 %	±0.01 %
<b>Input Range:</b>	0 to 2.5V	0 to 2.5 V	0 to 2.5 V	0 to 2.5 V
<b>Reference Voltage:</b>	2.5 V	2.5 V	2.5 V	2.5 V
<b>Input Connection:</b>	6-position removable screw terminal			
<b>Input Impedance:</b>	>1MΩ during acquisition, low impedance when inactive			
<b>Reference Output:</b>	2.5VDC, 2.5mA (1kΩ) maximum load			
<b>Maximum Input Signal Impedance:</b>	5kΩ			
<b>Specified Accuracy:</b>	Nominal range @ 25°C			
<b>Temperature Effect on Span:</b>	< 25µV over -40 to +80 °C			
<b>Temperature Effect on Offset:</b>	< 25µV over -40 to +80 °C			
<b>Engineering Units:</b>	stored in device, user may define any desired scale and offset from ±1.0000E-31 to ±9.9999E+31			

350 Ω sensors may be used with series resistors to produce >1 KΩ; 120 Ω gauges may be used in half and quarter bridge configurations

<b>Start Modes:</b>	Software programmable immediate or delay start up to 1 day
<b>Real Time Recording:</b>	May be used with PC to monitor and record data in real time
<b>Memory:</b>	32,767 readings; software configurable memory wrap.
<b>Reading Rate:</b>	20Hz to 12 hours
<b>Calibration:</b>	Digital calibration through software
<b>Calibration Date:</b>	Automatically recorded within device
<b>Battery Type:</b>	3.6V lithium battery included; <b>user replaceable</b>
<b>Battery Life:</b>	25 days
<b>Data Format:</b>	Date and time stamped %, ppm; ε, µε; V, mV, µV, engineering units specified through software
<b>Time Accuracy:</b>	±1 minute/month (at 20 to 30°C)
<b>Computer Interface:</b>	PC serial or USB (interface cable required); 57,600 baud
<b>Software:</b>	XP SP3/Vista/Windows 7
<b>Operating Environment:</b>	-40 °C to +80 °C, 0 to 95 %RH non-condensing
<b>Dimensions:</b>	0.8" x 1.7" x 2.7" (20mm x 42mm x 68mm)
<b>Weight:</b>	2 oz (60 g)
<b>Approvals:</b>	CE

**BATTERY WARNING:** FIRE, EXPLOSION, AND SEVERE BURN HAZARD. DO NOT RECHARGE, DISASSEMBLE, HEAT ABOVE 212°F, INCINERATE OR EXPOSE CONTENTS TO WATER.

## SOFTWARE FEATURES

<b>Multiple Graphs:</b>	Simultaneously analyze data from several units or deployments; easily switch to a single data series	<b>Statistics:</b>	Calculate averages, min, max, standard deviation, and mean kinetic temperature with the touch of a button
<b>Graphical Cursor:</b>	One click displays readings by time, value, parameter or sample number	<b>Export Data:</b>	Export data in a variety of common formats, or switch to Excel® with a single click
<b>Data Table:</b>	Instantly access tabular view for detailed dates, times, values, and annotations	<b>Calibration:</b>	Automatically calculate and store calibration parameters
<b>Scaling Options:</b>	Autoscale function fits data to the screen, or allows user to manually enter their own values	<b>Logger Configuration:</b>	Easy set up and launch of data loggers with immediate or delayed start, preferred sample rate, and device ID
<b>Formatting Options:</b>	Change colors, line styles, plotting options, show or hide channels quickly	<b>Communications:</b>	Automatically sets up communications port, or lets user select configuration

\*SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. SPECIFIC WARRANTY AND REMEDY LIMITATIONS APPLY. CALL 1-603-456-2011 OR GO TO WWW.MADGETECH.COM FOR DETAILS.

## ORDERING INFORMATION

Model	Description	Price (U.S.)
Bridge120-10	±10mV Bridge Recorder	\$549.00
Bridge120-25	±25mV Bridge Recorder	\$549.00
Bridge120-100	±100mV Bridge Recorder	\$549.00
Bridge120-1000	±1000mV Bridge Recorder	\$549.00
IFC110	Software, manual and RS232 interface cable	\$99.00
IFC200	Software, manual and USB interface cable	\$119.00
NIST	N.I.S.T. Calibration Certificate	Call for Pricing
LTC-7PN	Replacement battery for Bridge110	\$10.00

### ASK ABOUT OUR OTHER DATA RECORDERS

Temperature	Pulse/Event/State
Humidity	Low Level Current
Pressure	Low Level Voltage
pH	RF Transmitters
Level	Intrinsically Safe
Shock	Spectral Vibration
LCD Display	

For Quantity Discounts call 603-456-2011 or email [sales@madgetech.com](mailto:sales@madgetech.com)



DOC-1132009-00 REV E 2010.08.27