


# Signet Conductivity/Resistivity Tools

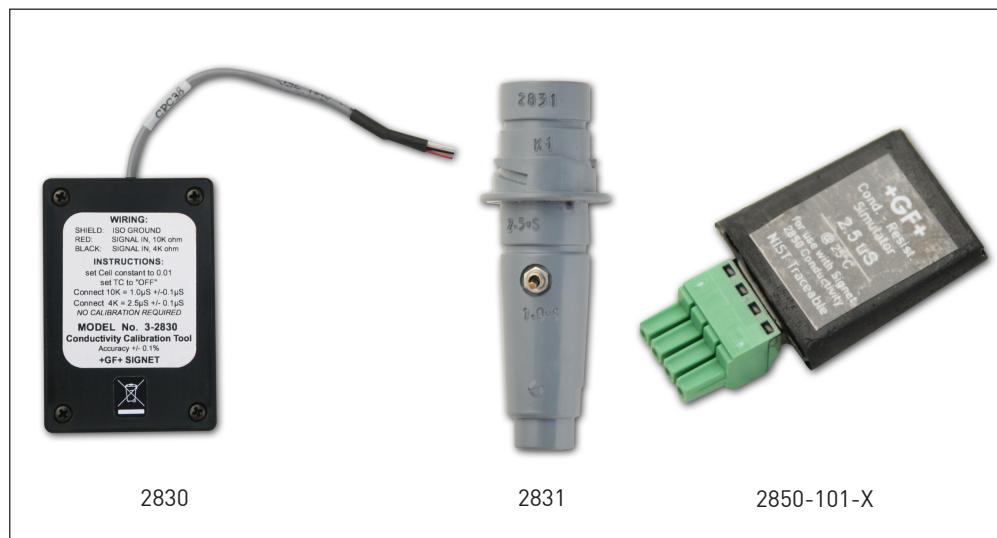

## Description

The Signet conductivity/resistivity tools are available for calibration or validation of electronics that are independent of the electrode. Because there are no available liquid standards for calibration in low conductivity and resistivity applications, these tools are ideal for various installations. All tools are built to conform to the ASTM D 1125-95 Standard (Standard Test Methods for Electrical Conductivity and Resistivity of Water), which is also commonly used for USP 24 applications.

Signet tools simulate, within  $\pm 0.1\%$  precision (accuracy), various values: 1.0  $\mu\text{S}$ , 2.5  $\mu\text{S}$ , 10.0  $\mu\text{S}$ , 10.0  $\text{M}\Omega$ , 18.2  $\text{M}\Omega$ . These tools are also temperature compensated to 25°C and enable the user to accurately validate or calibrate the electronics.

Model 2830 can be used with Signet Models 5800CR, 8850, and 8860 instruments. The 2850-101-X simulators are used with the newly released Model 2850 electronics and simply plug into the same terminals as the sensor cables.

## Features


- Simulates five different values
- Compatible with all Signet Conductivity/ Resistivity instruments
- Verifies electronics independent of electrode
- NIST traceable units
- Temperature compensated to 25°C
- All units ship with NIST traceable certificates

## System Overview


Signet 5800CR, 8850, 8860 Instrument (sold separately)	Signet 8900 Instrument (sold separately)	Programmable Logic Controller (Customer Supplied)
 Signet 2830 Certification Tool	 Signet 2850-5, 2850-52, 2850-61, 2850-62, 2850-63	 PLC

## Wiring

2830

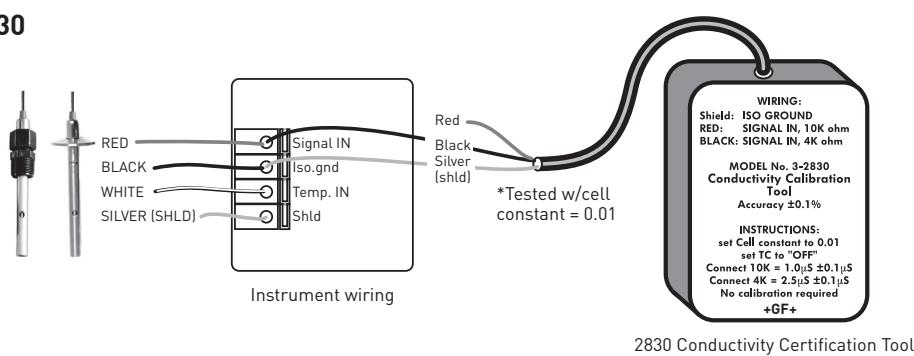

3-2850.101-X

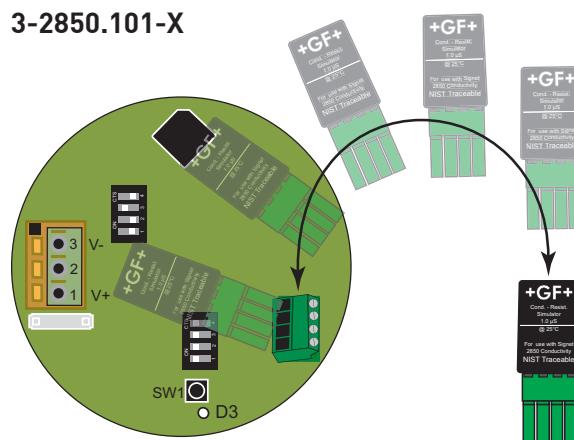

## Ordering Information

Other Products

Mfr. Part No.	Code	Description
3-2830	<b>159 000 628</b>	Conductivity Certification Tool, for Signet Models 5800 CR, 8850, 8860
3-2850.101-1	<b>159 001 392</b>	Plug-in NIST traceable tool, 1.0 µS simulated for Signet Models 2850-5X, 2850-6X
3-2850.101-2	<b>159 001 393</b>	Plug-in NIST traceable tool, 2.5 µS simulated for Signet Models 2850-5X, 2850-6X
3-2850.101-3	<b>159 001 394</b>	Plug-in NIST traceable tool, 10.0 µS simulated for Signet Models 2850-5X, 2850-6X
3-2850.101-4	<b>159 001 395</b>	Plug-in NIST traceable tool, 18.2 MΩ simulated for Signet Models 2850-5X, 2850-6X
3-2850.101-5	<b>159 001 396</b>	Plug-in NIST traceable tool, 10.0MΩ simulated for Signet Models 2850-5X, 2850-6X