

Features

- Ranges from ± 1.0 to ± 60 inH₂O
- Accuracy 0.05% of span
- Generates pressure and vacuum
- Dedicated tasks and dual readout
- Automatic zero equalization
- RS232 interface and documenting versions

Applications

The DPI 610/615 LP is the ideal reference standard to reduce instrument maintenance time and errors for quality systems compliance.

Dedicated tasks for transmitters, transducers, gauges, micromanometers and switches, simplify commissioning, maintenance and calibration.

The DPI 610/615 LP is designed to calibrate-in-place for very low pressure sensors

DPI 610/615 LP Series

Druck Portable Low Pressure Calibrators

DPI 610/615 LP Series is a Druck product. Druck has joined other GE high-technology sensing businesses under a new name—GE Industrial, Sensing.



Setting the Standard for Low Pressure Calibrators

The Druck DPI 610/615 LP series incorporates a precision low pressure sensor and pneumatic generation, to provide a fully self contained, portable low pressure calibrator.


The key to the simple operation of the DPI 610/615 LP is the task menu. Specific operating modes such as P-I task sets the calibrator to source pressure and measure mA, P-Display task allows indicator readings to be manually entered and recorded, for example when checking devices such as Magnehelic gauges.

At low differential pressures, even connecting the device under test can induce significant pressure. To compensate for this, an "auto zero" facility is provided which uses an internal solenoid valve to equalize the differential pressure prior to zero correction.

The DPI 610 has data storage and RS232 interface. Data can be transferred directly from the 610 to a PC (into a computer) for analysis, certificate printing and archiving.

The DPI 615 simplifies field use by calculating the device under test error and the pass/fail status and integrates with calibration management software systems, such as Intecal.

The DPI 615 also has data storage and RS232 interface but has two-way communication for downloading procedures and uploading results.

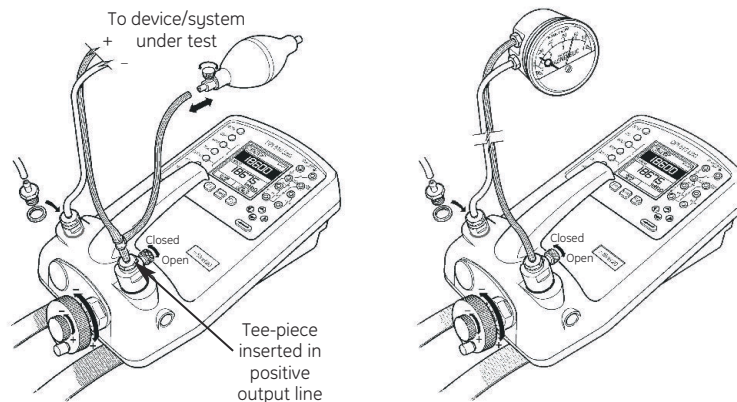

An external squeeze pump is supplied to supplement pressure generation into large volumes.

DPI 610/615 LP Specifications

Pressure

All models include an internal pressure sensor. Up to 10 external sensors can be ordered (option B). Select the internal sensor pressure range from the table below:

Pressure Range in H ₂ O	Accuracy % Span	Max Line Pressure	Max Differential Pressure
±1.0 in H ₂ O differential	0.05	70 psi	40 in H ₂ O
±5.0 in H ₂ O differential	0.05	300 psi	200 in H ₂ O
±10.0 in H ₂ O differential	0.05	300 psi	200 in H ₂ O
±20.0 in H ₂ O differential	0.05	300 psi	400 in H ₂ O
±30.0 in H ₂ O differential	0.05	300 psi	400 in H ₂ O
±60.0 in H ₂ O differential	0.05	300 psi	400 in H ₂ O

Accuracy

- Non-linearity, hysteresis and repeatability
- Temperature effects ±0.004% rdg/°F (averaged with respect to 68°F)

Calibrator Pressure Ports

2 x 1/8 in female with 1/8 in ID tube adapters

Pressure Media

Non-corrosive gases

Remote Sensor

Model LPE 9400

Specifications and ranges as above. Pressure connection 2 x 1/8 in ID hose adaptor.

Electrical

Input	Range	Accuracy	Resolution	Remarks
Voltage*	±50 VDC	0.05% Reading ±0.004% FS	100µV maximum	Autoranging, 10 MΩ
Current*	±55 mA	0.05% Reading 0.004% FS	0.001 mA	10 Ω, 50 V maximum
Temperature	15 to 105°F	2°F	0.1°F	Local ambient
Switch	Open/Closed			5 mA whetting
Voltage	10 VDC	0.1%		Maximum load 10 mA
	24 VDC	5%		Maximum load 26 mA
Current*	0 to 24 mA	0.05% Reading ±0.01% FS	0.001 mA	

*Temperature coefficient 0.004% reading/°F w.r.t. 68°F.

Features

Pressure Units

25 scale units plus one user defined

mA Source

automatic 10 second step cycle and programmable ramp (60 seconds end to end)

Data Logging

Multi-parameter with 10,000 value memory

RS232 Interface

- DPI 610 Uni-directional for uploading results to a PC.
- DPI 615 Bi-directional for downloading procedures and uploading results

Process Functions

Filter, max/min, tare, flow, % span

Language

English, French, German, Italian, Portuguese and Spanish

Power Management

Auto power off, auto backlight off, battery status indicator

Display

2.4 in x 2.4 in graphic LCD with backlight ±99999 readout, two readings per second

Environmental

Temperature

- Operating range: 15°F to 120°F
- Calibrated range: 15°F to 105°F

Humidity

0 to 90% non-condensing

Conformity

- EN61010, EN50081-1, EN50082-1
- CE marked

Physical

Weight: 7.7 lb, size 11.8 in x 6.7 in x 5.5 in

Batteries

Ni-cad battery pack (20 hours nominal). Charger supplied. Alternatively 6 x 1.5 V alkaline C cells (65 hrs nominal use at 68°F)

Options

(A) Spare rechargeable batteries and charger

Rechargeable battery pack (P/N 191-A022) and 110 VAC charger/power supply (P/N 191-A023). A 220 VAC charger/power supply (P/N 191-129) is also available.

(B1) Remote pressure sensors

The range of the DPI 610/615 LP can be extended with up to ten remote pressure sensors. For standard low pressure ranges please refer to specification. For higher range gauge, absolute or differential sensors up to 10,000 psi refer to Druck. A mating cable is required—see Option (B2).

(B2) Mating cable for remote sensors

A six feet mating cable for connecting remote sensors to the calibrator. At least one cable should be ordered when ordering Option (B1).

Calibration Management Systems

The DPI 615LP is compatible with Intecal and Intecal for industry calibration management software. Please visit www.gesensing.com for more information and free downloads.

Accessories

Supplied with carrying case, test leads, 1/8 in ID hose, user guide, a manual pressure/vacuum squeeze pump and 1/8 in ID hose “T” connector, calibration certificate, rechargeable batteries and charger.

Calibration Standards

Instruments manufactured by GE are calibrated against precision calibration equipment traceable to National Institute of Standards and Technology (NIST).

Related Products

- Portable field calibrators
- Laboratory and workshop instruments
- Pressure transducers and transmitters

GE manufactures a wide range of pressure transducers and transmitters, including the LP Series of low pressure sensors.

Please refer to Druck for further information.

Ordering Information

Please state the following (where applicable):

1. Type DPI 610 LP or DPI 615 LP
2. Integral pressure range
3. Pressure connection 1/8 in NPT female
4. Options

Option (B1) state the pressure range and pressure connection and order as a separate line item.



©2006 GE. All rights reserved.
920-108A

All specifications are subject to change for product improvement without notice. GE® is a registered trademark of General Electric Co. Other company or product names mentioned in this document may be trademarks or registered trademarks of their respective companies, which are not affiliated with GE.

www.gesensing.com