


729/729 FC Automatic Pressure Calibrator










To prevent possible electrical shock, fire, or personal injury, read the "729/729 FC Safety Sheet" before you use this Product.

Go to www.fluke.com to register your product, download manuals, and find more information.

Display

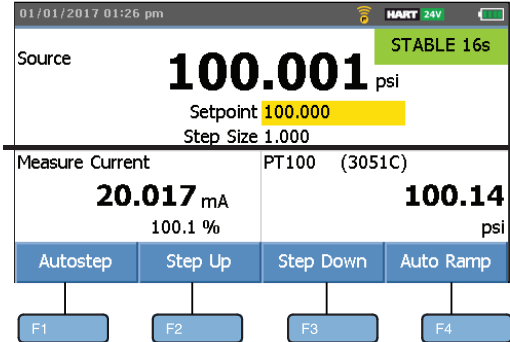

UPPER
LOWER

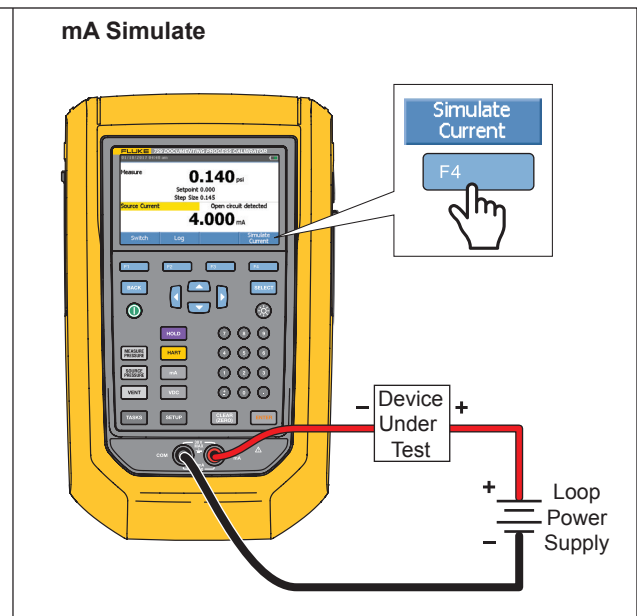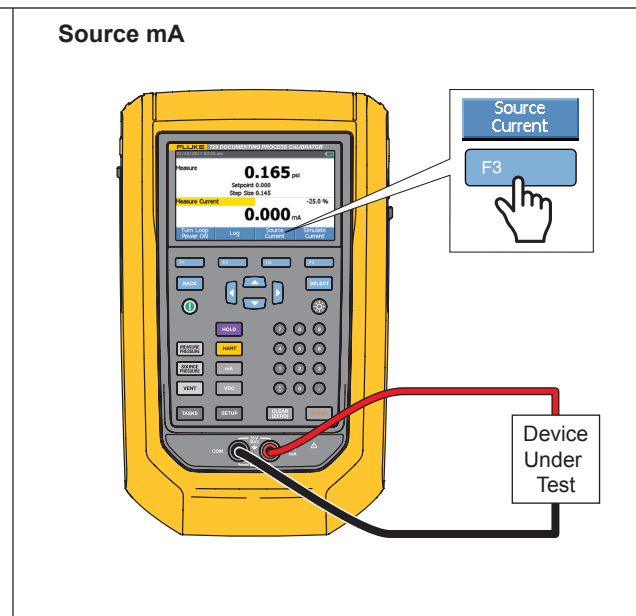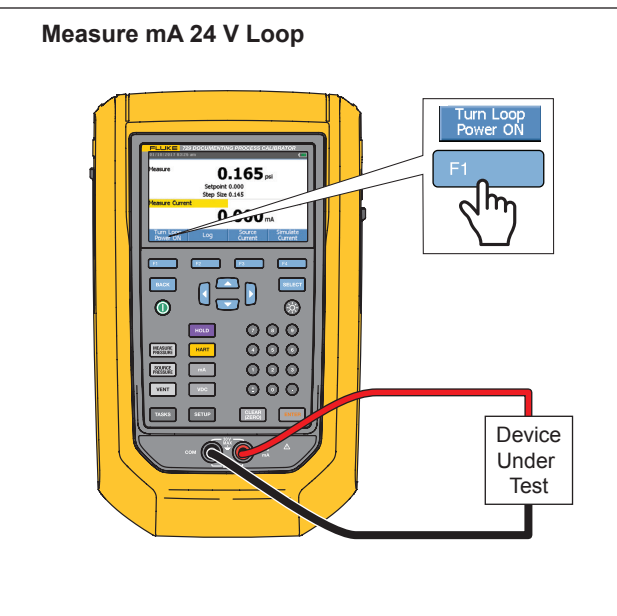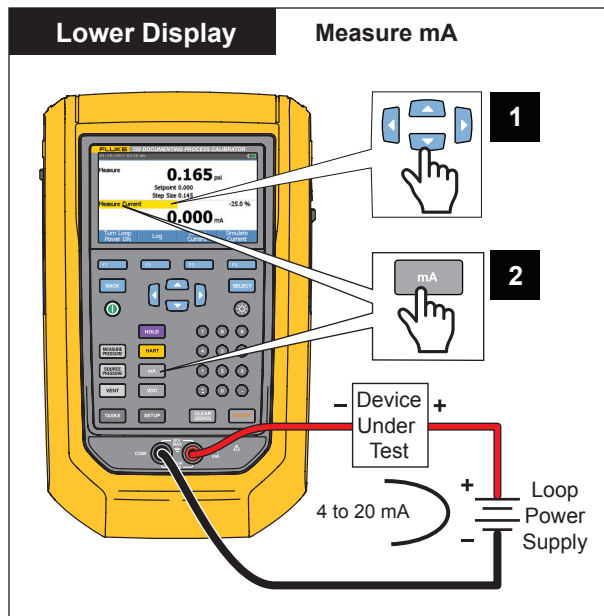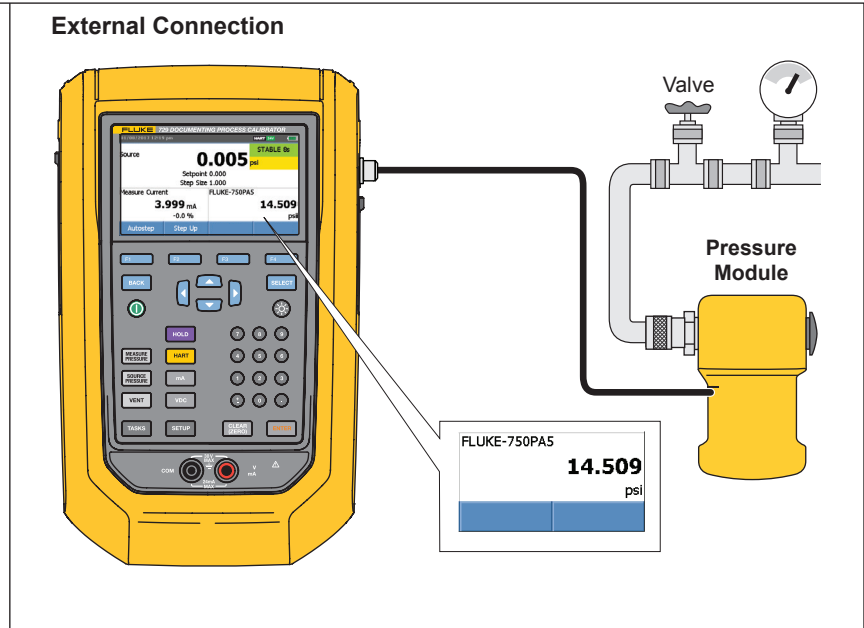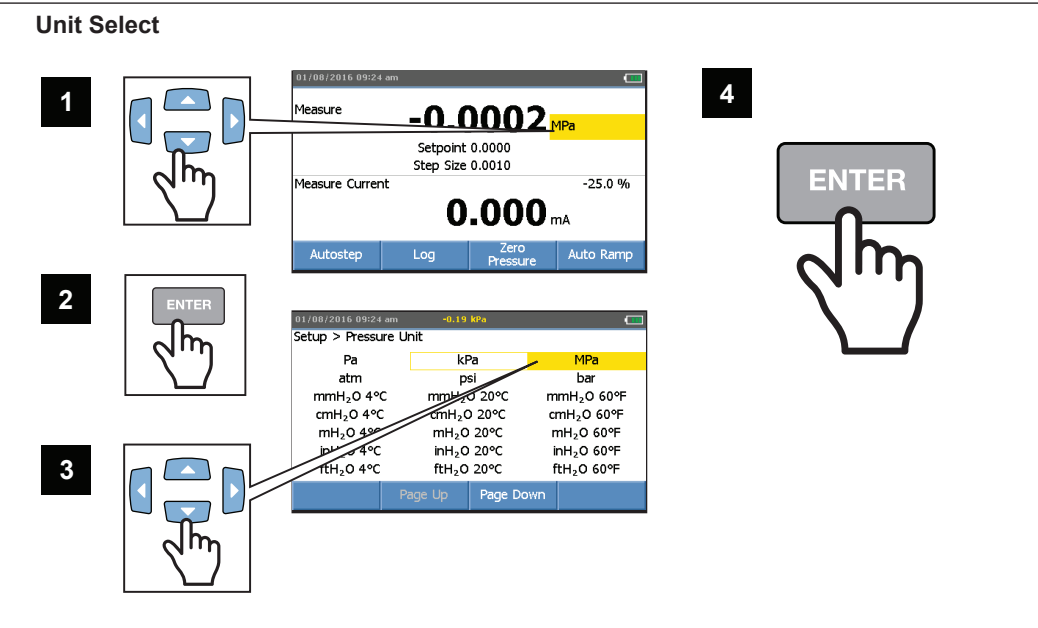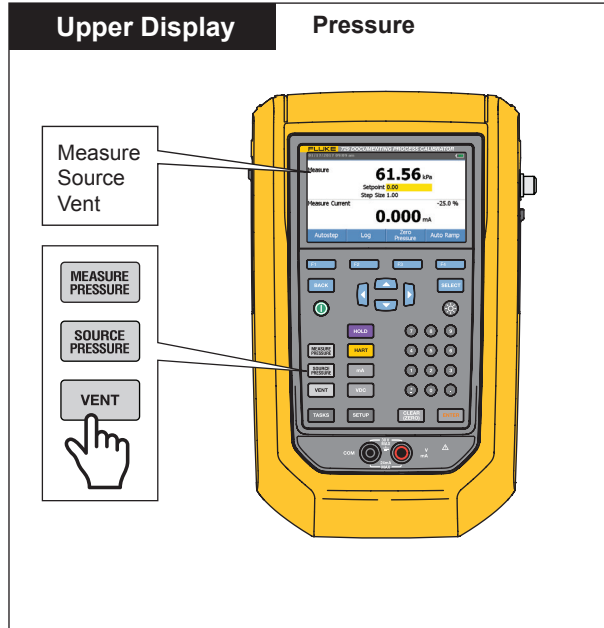

Lower Display Measure Volts

Up to 30 V
Device Under Test

Measure RTD

RTD Probe

Temperature Units

1 F4
2 °F / °C

Batteries

USB

Tasks

1 TASKS
2

- 1. Pressure Transmitter (P/I)
- 2. Pressure Switch (SW)
- 3. Current to Pressure Test (I/P)
- 4. Pressure Leak Test
- 5. Pressure Transmitter (P/V)
- 6. Pneumatic Pressure Transmitter (P/P)

Downloaded Tasks Custom Tasks Resume Tasks

Set Language

1 SETUP 2 2.729 Setup
3 2 4 ENTER 5 English / 简体中文
6 Up/Down arrows 7 English / 简体中文 8 ENTER

USB Port