


Clamp adapter for process sensors

VARIABLE CLAMP ADAPTER 150

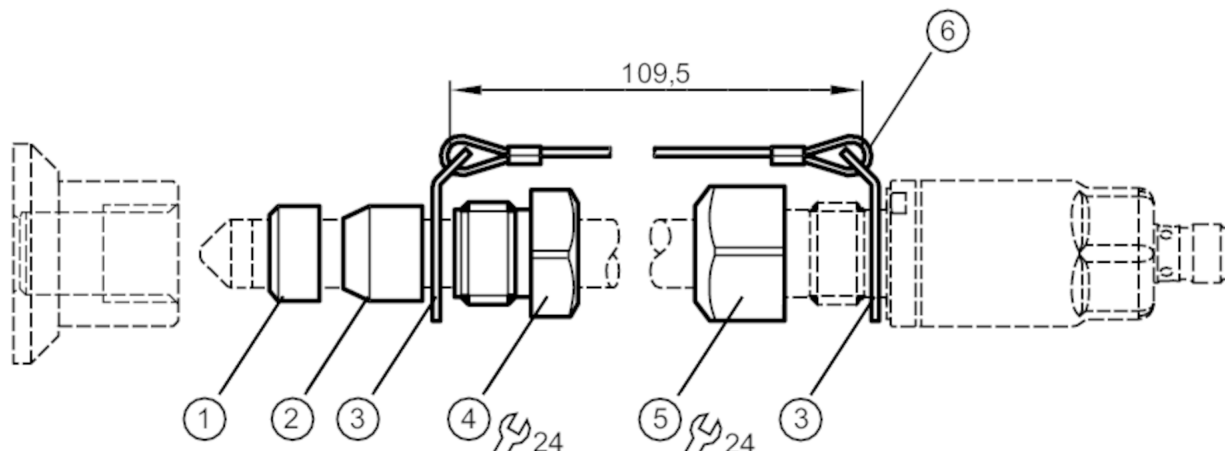

- 1 socket
- 2 Clamping device
- 3 retaining element
- 4 clamp fitting, tightening torque 25...30 Nm
- 5 lock nut, tightening torque min. 25 Nm
- 6 security cable

EHEDG Certified

Application	
Design	for hygienic adaptations G 1/2, for level sensor LMT104
Installation	Clamp fitting
Mechanical data	
Weight [g]	174.5
Materials	PEEK-GF30 surface characteristics: Ra < 0,8 µm / Rz 4 µm; stainless steel (316L/1.4404) surface characteristics: Ra < 0,8 µm / Rz 4 µm
Sensor connection	Ø 14 mm
Process connection	threaded connection G 1/2 sealing cone
Remarks	
Pack quantity	1 pcs.