


## Clamp adapter for process sensors

VARIABLE CLAMP ADAPTER 250

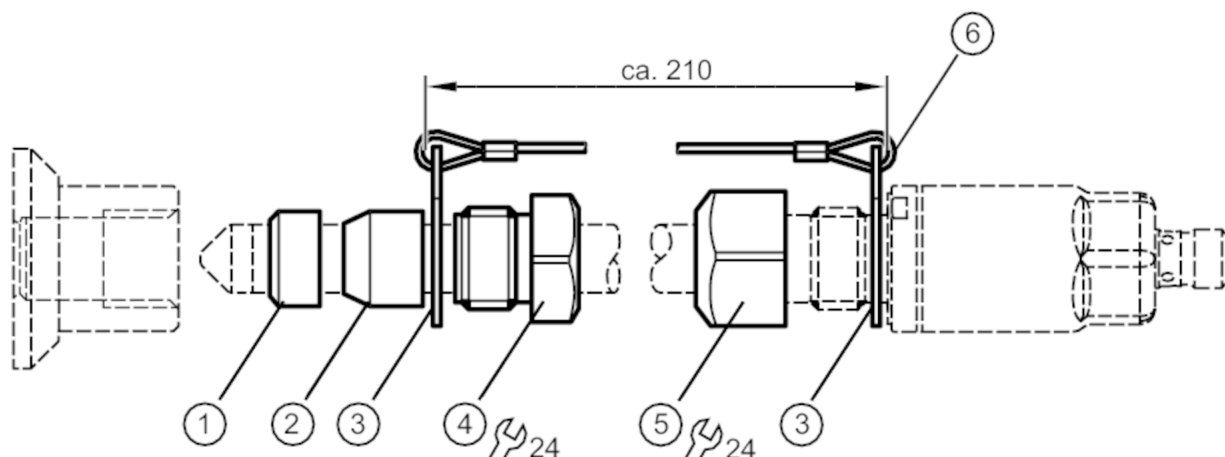

- 1 socket
- 2 Clamping device
- 3 retaining element
- 4 clamp fitting, tightening torque 25...30 Nm
- 5 lock nut, tightening torque min. 25 Nm
- 6 security cable

EHEDG Certified 

## Application

|              |                                                                                  |
|--------------|----------------------------------------------------------------------------------|
| Design       | for hygienic adaptations G 1/2, for level sensor LMT105, for level sensor LMT105 |
| Installation | Clamp fitting                                                                    |

## Mechanical data

|                    |                                                                                                                                        |       |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------|-------|
| Weight             | [g]                                                                                                                                    | 175.5 |
| Materials          | PEEK-GF30 surface characteristics: Ra < 0,8 µm / Rz 4 µm; stainless steel (316L/1.4404) surface characteristics: Ra < 0,8 µm / Rz 4 µm |       |
| Sensor connection  | Ø 14 mm                                                                                                                                |       |
| Process connection | threaded connection G 1/2 sealing cone                                                                                                 |       |

## Remarks

|               |        |
|---------------|--------|
| Pack quantity | 1 pcs. |
|---------------|--------|