

Features


- Resistant to corrossions and chemicals
- Rugged design
- User-friendly
- Reusable
- Atmospheric pressure compensated
- Programmable start time
- Powerful software simplifies analysis

Applications

- Water level monitoring
- Well monitoring
- Environmental studies
- Waste water treatment
- Flood analysis
- Groundwater monitoring
- Irrigation canals
- Lake and wetland studies
- Stormwater studies
- Landfill and hazardous site analysis

The Level2000 accurately monitors and records water level and temperature. Its rugged, stainless steel design allows for the device to be placed in harsh environments, which makes it well suited for use at waste water treatment facilities, monitoring well and ground water levels, irrigation canals, lake and wetland studies and other water level applications. The integrated vented tube allows the device to be atmospheric pressure compensated, providing improved accuracy and resolution over other, non-vented water level recorders.

The Level2000 uses a rugged stainless steel pressure strain gauge to accurately measure the water level. Our user-friendly software will display all pressure measurements in the user's choice of feet, inches, meters, centimeters, millimeters or PSI. The device uses an internal temperature sensor to provide accurate temperature measurements eliminating the need for a separate temperature recorder. The logger can be started to take measurements every two seconds for rapid changes in water level, up to one reading every twelve hours. The Level2000 has the ability to record up to 16,383 readings and store it in its non-volatile memory.

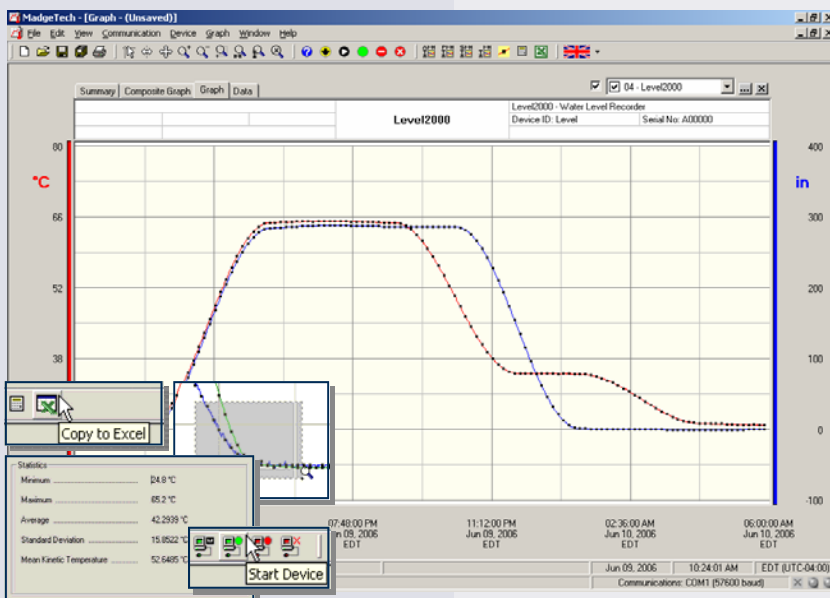

MadgeTech Data Recorder Software displays water level and temperature data in an easy to use graph.

The Windows®-based software package allows the user to effortlessly collect, display and analyze data. A variety of powerful tools allow you to examine, export, and print professional looking data with just a click of the mouse.

Click [MadgeTech Software](#) for more information or to download the software.

LEVEL2000 SPECIFICATIONS*

Temperature Sensor: Semiconductor	Reading Interval: 1 reading every 2 seconds to 1 every 12 hours
Temperature Range: -40 to +80°C	Start Time: Software programmable start time and date, up to six months in advance
Temperature Resolution: 0.1°C	Real Time Recording: May be used with PC to monitor and record data in real time
Calibrated Accuracy: ±0.5°C (0 to +50°C)	Calibration: Digital calibration through software
Pressure Sensor: Semiconductor strain gauge	Calibration Date: Automatically recorded within device
Media Compatibility: Must be compatible with 303 stainless steel	Power: 3.6V lithium battery included
Level Nominal Range: 0 to 30'	Battery Life: 1 year typical at 25°C
Effective Resolution: 0.02"	Data Format: Date and time stamped °C, °F, K, °R; PSI, inches, feet, millimeters, centimeters, meters (of water column)
Calibrated Accuracy: Nominal range ±0.3% max @ 25°C	Time Accuracy: ±1 minute/month (RS232 cable not in use)
Response Time: 90% change in 1ms	Computer Interface: PC serial or USB (interface cable required); 2,400 baud
Repeatability: ±0.5%FSR; ±0.2% typical	Software: Windows 95/98/ME/NT/2000/XP based software
Proof Pressure: 45 PSIG	Operating Environment: -40 to +80 °C, 0 to 100%RH
Burst Pressure: 75 PSIG	Dimensions:
Desiccant: Indicating silica gel with viewing window (blue = dry; pink = saturated)	Submersible End: 9.1" x 1.25" dia. (232mm x 32mm dia.)
Desiccant Life: 7 days @ 99%RH; (can be regenerated by heating canister @ 350°F for 1 hour)	Communications End: 7.1" x 1.2" dia. (181mm x 31mm dia.), plus cable
Memory: 16,383 readings per channel (32,766 total readings)	Weight: 3 lb (1.4 kg)
	Approvals: CE

BATTERY WARNING: RISK OF FIRE OR EXPLOSION. DO NOT RECHARGE, FORCE OPEN, HEAT OR DISPOSE OF IN FIRE.

SOFTWARE FEATURES

Multiple Graphs: Simultaneously analyze data from several units or deployments; easily switch to a single data series	Statistics: Calculate averages, min, max, standard deviation, and mean kinetic temperature with the touch of a button
Graphical Cursor: One click displays readings by time, value, parameter or sample number	Export Data: Export data in a variety of common formats, or switch to Excel® with a single click
Data Table: Instantly access tabular view for detailed dates, times, values, and annotations	Calibration: Automatically calculate and store calibration parameters
Scaling Options: Autoscale function fits data to the screen, or allows user to manually enter their own values	Logger Configuration: Easy set up and launch of data loggers with immediate or delayed start, preferred sample rate, and device ID
Formatting Options: Change colors, line styles, plotting options, show or hide channels quickly	Communications: Automatically sets up communications port, or lets user select configuration

*SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. SPECIFIC WARRANTY AND REMEDY LIMITATIONS APPLY. CALL 1-603-456-2011 OR GO TO WWW.MADGETECH.COM FOR DETAILS.

ORDERING INFORMATION

Model	Description	Price (U.S.)
LEVEL2000	Vented Water Level and Temperature Recorder	\$749.00
IFC110	Software, manual and RS232 interface cable	\$99.00
IFC200	Software, manual and USB interface cable	\$119.00
NIST	N.I.S.T. Calibration Certificate	Call for Pricing
TL-2150	Replacement battery for Level2000	\$10.00

For Quantity Discounts call 603-456-2011 or email sales@madgetech.com

ASK ABOUT OUR OTHER DATA RECORDERS

Temperature	Pulse/Event/State
Humidity	Low Level Current
Pressure	Low Level Voltage
pH	RF Transmitters
Level	Intrinsically Safe
Shock	Spectral Vibration

