


- ✔ Super Bright LCD Display
- ✔ NEMA 4X Enclosure
- ✔ Security Protection

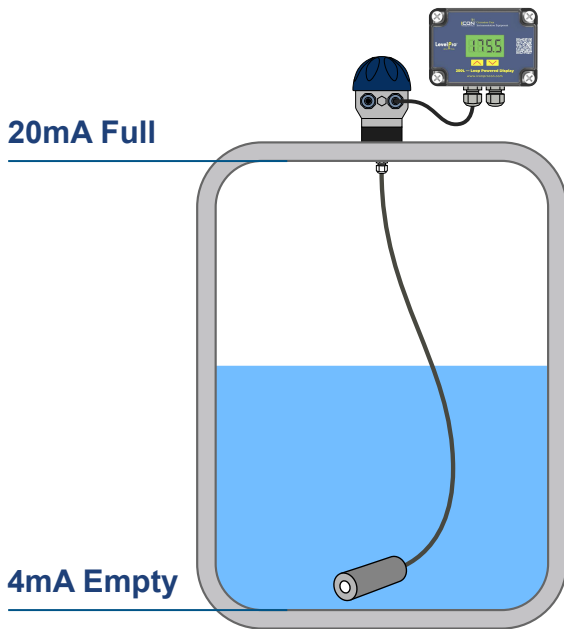

FEATURES

- ✔ Loop Powered
- ✔ NEMA 4X Enclosure
- ✔ LCD Display
- ✔ All Plastic - Corrosion Resistant
- ✔ All Cord Grips Included
- ✔ Simple Programming

SPECIFICATIONS

Power Supply	Loop Powered
Display	LCD 4 x 20 mm High
Displayed Values	-999 - +9999
Input	Current : 4-20mA
Accuracy	0.1% @ 25°C One Digit
Stability	50 ppm °C
Operating Temp	-40 - 158°F (-40 - 70°C)
Storage Temp	-40 - 158°F (-40 - 70°C)
Protection Class	NEMA 4X IP67
Case	Wall Mounted Material - Polycarbonate
Dimensions (WxNxH)	110 x 105 x 67 mm

ORDERING

Part Number	Input
250L	4-20mA