

# OCTPROCESSV2

## 8-CHANNEL CURRENT

### DATA LOGGER



#### Features

- 16-bit readings provide high resolution
- User-defined engineering units
- Pushbutton or Programmable Start Time
- External Power or User Replaceable Battery
- Real time operation
- Up to 4 Hz Reading Rate
- Calibration Certificate included
- Title Channels

#### Applications

- 4 mA to 20 mA recording
- pH recording
- Low level signal monitoring
- Photovoltaic studies
- Battery studies
- Biological sensor monitoring
- Factory process control
- Research and development
- Medical and Pharmaceutical
- Environmental studies



The OctProcessV2 is an 8-channel, battery powered, low level DC current data logger with a reading rate of up to 4 Hz. It can measure and record 261,888 readings per channel. To maximize memory capacity, users can enable or disable channels. For easy identification, each channel can be named with up to a ten digit title.


This easy to use device features a 1 year battery life, user replaceable battery and programmable engineering units. The storage medium is non-volatile solid state memory, providing maximum data security even if the battery becomes discharged.

Using the MadgeTech Software, starting, stopping and downloading from the OctProcessV2 is simple and easy. Graphical, tabular and summary data is provided for analysis and data can be viewed in multiple units, using the Engineering Units function. The data can also be automatically exported to Excel® for further calculations.

## MADGETECH DATA LOGGER SOFTWARE

#### Key

- A** Graph View
- B** Tabular Data View
- C** Statistics
- D** Digital Calibration
- E** Copy to Excel®

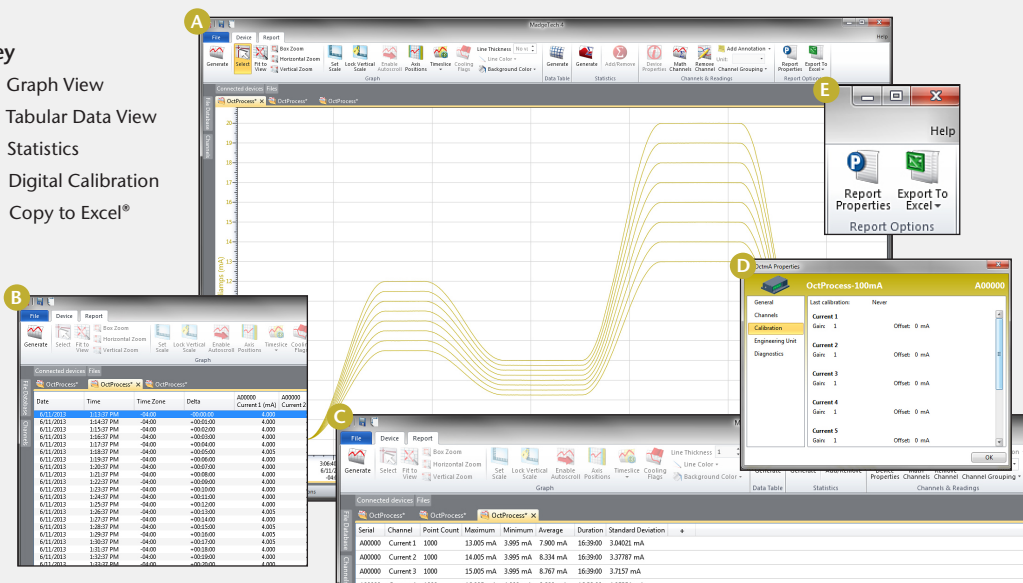

# OCTPROCESSV2 SPECIFICATIONS\*

\*Specifications are subject to change without notice. Specific warranty remedy limitations apply. Call (603) 456-2011 or go to [madgetech.com](http://madgetech.com) for details.

<b>Nominal Range:</b>	-2 mA to +30 mA	±160 mA	±3 A
<b>Measurement Range:</b>	-2 mA to +30 mA	±160 mA	±3 A
<b>Input Voltage Range:</b>	0 to 2.5 V	0 to 2.5 V	0 to 2.5 V
<b>Resolution:</b>	0.5 µA	5 µA	100 µA
<b>Calibrated Accuracy:</b>	±0.05% FSR	±0.05% FSR	±0.15% FSR
<b>Input Impedance:</b>	10 Ω	1 Ω	0.1 Ω
<b>Overload Protection: (-0.3 V to +3.5V)</b>	±316 mA	±1 A	±6 A
<b>Input Connection:</b>	8, 3-input removable screw terminals		
<b>Analog Conversion Time:</b>	150 ms		
<b>Temperature Coefficient:</b>	< 50 ppm/°C typical		
<b>Engineering Units:</b>	Native Measurement units can be scaled to display measurement units of another type. This is useful when monitoring current outputs from different types of sensors such as temperature, CO <sub>2</sub> , flow rate and more.		
<b>Start Modes:</b>	Software programmable immediate start and delay start up to six months in advance		

<b>Memory: (all 8 channels enabled)</b>	261,888 readings per channel
<b>Reading Rate:</b>	4 Hz up to 1 reading every 24 hours
<b>Real Time Recording:</b>	May be used with PC to monitor and record data in real time
<b>Calibration:</b>	Digital calibration through software
<b>Calibration Date:</b>	Automatically recorded within device
<b>Battery Type:</b>	9V lithium or alkaline battery included; <b>user replaceable</b>
<b>Battery Life:</b>	1 year typical
<b>Time Accuracy:</b>	±1 minute/month
<b>Data Format:</b>	Date and time stamped A, mA, µA, engineering units specified through software
<b>Software:</b>	Windows XP SP3 or later MadgeTech 4 Software, version 4.2.12.0 or later
<b>Computer Interface:</b>	USB (Interface cable required); 115,200 baud
<b>Operating Environment:</b>	-20 °C to +60 °C (-4 °F to +140 °F), 0 %RH to 95 %RH non-condensing
<b>Dimensions:</b>	2.7 in x 7.2 in x 1.3 in (69 mm x 184 mm x 32 mm)
<b>Weight:</b>	17 oz (490 g)

Common mode voltage must be less than 3 volts. All inputs must be within 3 volts of all other inputs.

**BATTERY WARNING:** BATTERY MAY LEAK, FLAME OR EXPLODE IF DISASSEMBLED, SHORTED, CHARGED, CONNECTED TOGETHER, MIXED WITH USED OR OTHER BATTERIES, EXPOSED TO FIRE OR HIGH TEMPERATURE. DISCARD USED BATTERY PROMPTLY. KEEP OUT OF REACH OF CHILDREN.

## ORDERING INFORMATION

MODEL	PART NUMBER	DESCRIPTION
OCTPROCESSV2-30mA	902081-00	-2 mA to +30 mA 8-Channel Current Data Logger
OCTPROCESSV2-160mA	902083-00	±160 mA 8-Channel Current Data Logger
OCTPROCESSV2-3A	902085-00	±3 A 8-Channel Current Data Logger
IFC200	900298-00	Software, manual and USB interface cable
U9VL-J	901804-00	Replacement battery for OctProcessV2

**ASK ABOUT OUR OTHER DATA LOGGERS**

- Temperature
- Humidity
- Pressure
- pH
- Level
- Shock
- LCD Display
- Pulse/Event/State
- Current
- Voltage
- Wireless
- Intrinsically Safe
- Spectral Vibration
- Motion

For Quantity Discounts call (603) 456-2011 or email [sales@madgetech.com](mailto:sales@madgetech.com)