







Tangential turbine flow meters continue to be the most common way to measure flow electronically in a wide range of industries. Enhancements to tangential turbine flow meter systems are producing a flow sensing device that is smaller, easier to install and more accurate than ever before.

Operation


The rotational velocity of the rotary wheel varies linearly with the average velocity of the fluid flowing through the flow meter. Producing a square wave pulse from magnets embedded in the vanes of the rotor wheel. Depending on the output version of the M-10000, the pulse signal is relayed directly, converted to a 0-10 VDC (voltage) output or a 4-20 mA (current) output. The voltage and current models are span adjustable over the flow range of the unit.

Applications

- Cooling systems
- Laser equipment
- Wet process systems
- CVD, CMP, and lithography tools
- Corrosive chemical distribution

Key Features

- Wide flow rangeability
- Outstanding accuracy
- State-of-the-art electronics high reliability
- 4-20 mA, 0-10 VDC, or pulse output
- Visual indication
- Adjustable flow switch built in
- Small footprint

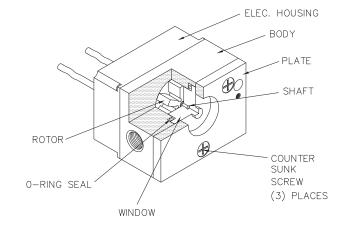



M-10000 in 316SS



M-10000 in Celcon®

Installation

The M-10000 Rotary Flow meter may be installed horizontally or vertically, but axis of the rotor should be parallel to the ground.

Specifications

| | 1/4" FNPT | 0.1 - 1 I/min, 0.3 - 31/min, 0.5 - 5 I/min | | | |
|--------------------------|---|--|--|--|--|
| | 3/8" FNPT | 1 - 10 l/min, 2 - 20 l/min, 3 - 30 l/min | | | |
| M-10000 Operating Ranges | 1/2" FNPT | 4 - 40 l/min, 5 - 50 l/min | | | |
| | 3/4" FNPT | 20 - 115 l/min | | | |
| | 1" FNPT | 38 - 225 l/min | | | |
| Set Point Accuracy | ± 5% maximum | | | | |
| Repeatability | 0.5% | | | | |
| Mounting | Horizontal or vertical mounting; axis of rotor should be parallel to the ground | | | | |
| Material Versions | • Celcon® • 316 Stainless Steel | | | | |

Standard Component Materials

| Body | Celcon | 316SS | |
|-----------|----------------------|----------------------|--|
| Rotor | Composite PPS | Composite PPS | |
| Shaft | Zirconium Ceramic | Zirconium Ceramic | |
| Window | Polycarbonate | 316SS | |
| Bushings | N/A | N/A | |
| O-Ring | FKM | FKM | |
| FacePlate | PPS | PPS | |

Physical Specifications

| Body | | Celcon | 316SS | |
|---|---------------------|--|-----------|--|
| Maximum Operating pressure (for standard units)* | | 100 psi | 200*psi | |
| VA/-: | 1/4" and 1/2" ports | ~0.8 lbs | ~1.5 lbs | |
| Weight | 3/4" and 1" ports | ~1.5 lbs | ~ 6.4 lbs | |
| Viscosity | | Up to 120 censtistokes (~ 30 weight oil) | | |
| Pressure Drop | | Contact Factory | | |
| Fluid temperature | | Upto 90 Deg C | | |

Electrical Specification

| | Voltage Version | 12 to 24 VDC+10% | | | | |
|--|---|--------------------|--|--|--|--|
| Power Supply | Current Version | 24 VDC+10% | | | | |
| | Pulse Train | 3.8 VD C to 24 VDC | | | | |
| Current Draw | | 50 | mA maximum | | | |
| Temperature | | | 60 Deg C* | | | |
| | | 2 Belden Cable | es(2-wire and 5-wire cables) | | | |
| | | 2-wire cable | Red:12 to 24 VDC Black: ground | | | |
| | Voltage Version | 5-wire cable | Green: Normally open Brown: Normally closed White: Relay common Red: Analog signal output Black: Signal ground (power and signal ground are common) | | | |
| | | 2-wire cable | Red: 24 VDC +10% Black: Ground | | | |
| Electrical Connection | Current Version | 5-wire cable | Green: Normally open Brown: Normally closed White: Relay common Red: 4 - 20 mA analog output signal Black: 4 - 20 mA signal ground (power and singal- ground are NOT common) | | | |
| | 1 Belden Cable (3 - wire cables) | | | | | |
| | Pulse Train | 3-wire cable | Red: 3.8 VD C to 24 VDC Black: Ground (power and signal ground are common) Green:Signal | | | |
| SPDT Relay (Available with Current or Voltage Output version only) | * Contacts rated at 30 VDC, 2 amps resistive load. * Nominal switching capacity (resistive): 2A, 30 VDC * UL/CSA rating (up to 24 V coil type): 2A, 20 VDC; 0.3A, 110 VDC; or 0.5A, 125 VAC | | | | | |

^{*} Select Remote electronics for fluid temperature beyond 60° C ${\bf 4}$

Signal Outputs

| Voltage Version | 0 - 10 VDC analog output. |
|------------------|--|
| Current Version: | 4 - 20 mA maximum external load: 1K ohm. |
| Pulse Version: | 0 - 120 Hz square wave pulse train. Signal amplitude is equal to supply voltage. |

Port / Range Combinations

| Port Size | Range code for LPM | Range LPM | Range code for GPM | Range GPM |
|-----------|--------------------|------------|--------------------|--------------|
| 1/4" | 01 | 0.1 - 1.0 | 11 | 0.026 - 0.26 |
| 1/4" | 02 | 0.3 - 3.0 | 12 | 0.08 - 0.8 |
| 1/4" | 03 | 0.5 - 5.0 | 13 | 0.13 - 1.3 |
| 3/8" | 04 | 1.0 - 10.0 | 14 | 0.26 - 2.6 |
| 3/8" | 05 | 2.0 - 20.0 | 15 | 0.52 - 5.2 |
| 3/8" | 06 | 3.0 - 30.0 | 16 | 0.8 - 8.0 |
| 1/2" | 07 | 4.0 - 40.0 | 17 | 1.0 - 10.0 |
| 1/2" | 08 | 5.0 - 50.0 | 18 | 1.3 - 13.0 |
| 3/4" | 3/4" 09 | | 19 | 5.0 - 30.0 |
| 1" | 1" 10 | | 10 | 10.0 - 60.0 |


Certifications


CE Compliance

As per EU directive 2014/30/EU


Dimensional Drawings


Illustrated is the M-10000 model with 1/4" ports

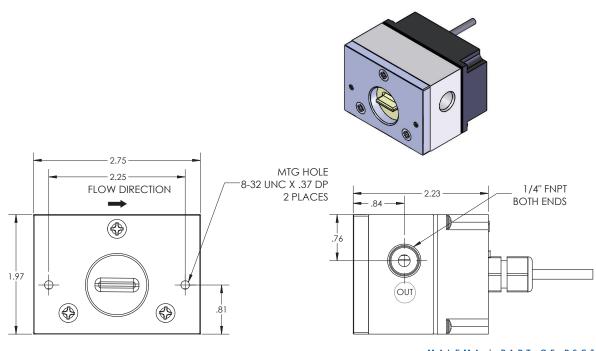


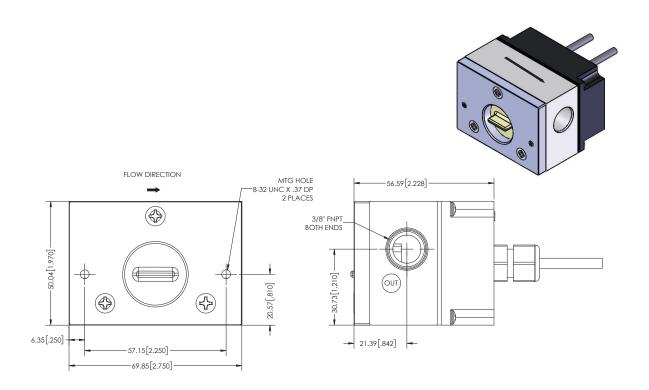


Illustrated is the M-10000 with 1/2" ports

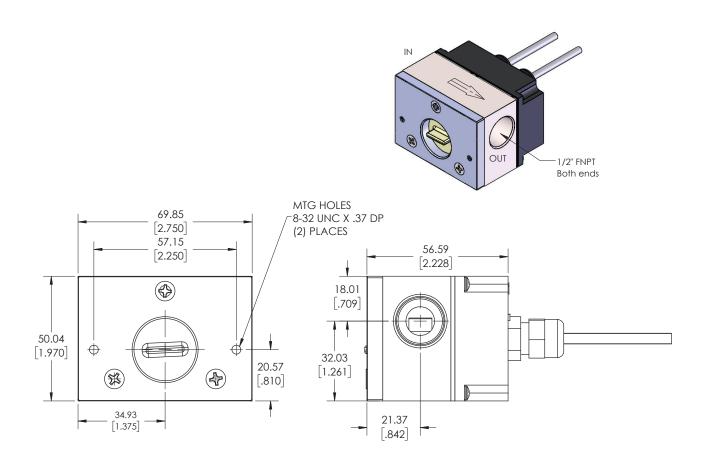







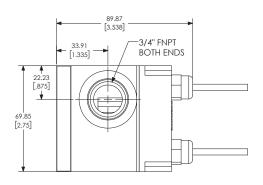

Illustrated is the M-10000 with 1" ports

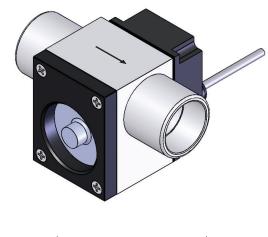

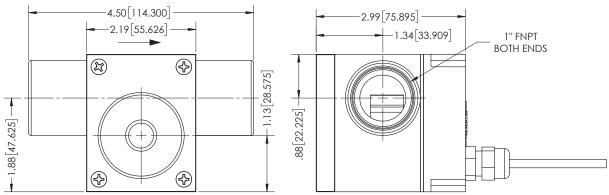

Ordering Information

| | | | | | Part numbers for | SS and Celcon M-1000 | 00 | | | | | |
|-------|------------|------|----------|----------------|---|-------------------------|-----|-------------------|----------|----------|----------------|-----------|
| | 10000 | | | Fluid | Range Code, Flow Range | | | | | | cı c | |
| M - | 10000 | | Body | Connection | and Connection | Output | | Window | O-ring | Rotor | Shaft | Faceplate |
| М - | 10000 | | | | | | | | | | | |
| | | - | | | | | | | | | | |
| | | | | 2- 1/4" FNPT | | | | | | | | |
| | | | | 3- 3/8" FNPT | | | | | | | | |
| | | 1 | S-SS316 | 4- 1/2" FNPT | | | | | | | | |
| | | | | 6- 3/4" FNPT | | | | | | | | |
| | | | | 8- 1" FNPT | | | | | | | | |
| | | | | 2- 1/4" FNPT | | | | | | | | |
| | | | | 3- 3/8" FNPT | | | | | | | | |
| | | (| C-Celcon | 4- 1/2" FNPT | | | | | | | | |
| | | | | 6- 3/4" FNPT | | | | | | | | |
| | | | | 8- 1" FNPT | | | | | | | | |
| | | | | | 01 -0.1 -1 l/m (1/4" FNPT) | | | | | | | |
| | | | | | 02 -0.3 -3 l/m (1/4" FNPT) | | | | | | | |
| | | | | | 03 -0.5 -5 l/m (1/4" FNPT) | | | | | | | |
| | | | | | 04 -1 -10 l/m (3/8" FNPT) | | | | | | | |
| | | | | | 05 -2 -20 l/m (3/8" FNPT) | | | | | | | |
| | | | | | 06 -3 -30 l/m (3/8" FNPT) | | | | | | | |
| | | | | | 07 -4 -40 l/m (1/2" FNPT) | | | | | | | |
| | | | | | 08 -5 -50 l/m (1/2" FNPT) | | | | | | | |
| | | | | | 09 -20 -115 l/m (3/4" FNPT) | - | | | | | | |
| | | | | | 10 -38 -225 l/m (1" FNPT) | - | | | | | | |
| | | | | | 11 - 0.026-0.26 GPM (1/4" FNPT) | | | | | | | |
| | | | | | 12- 0.08-0.8 GPM (1/4" FNPT) | | | | | | | |
| | | | | | 13- 0.13-1.3 GPM (1/4" FNPT) | | | | | | | |
| | | | | | 14- 0.26-2.6 GPM (3/8" FNPT) | | | | | | | |
| | | | | | 15- 0.52-5.2 GPM (3/8" FNPT) | | | | | | | |
| | | | | | 16- 0.8-8.0 GPM (3/8" FNPT) | | | | | | | |
| | | | | | 17- 1.0-10.0 GPM (1/2" FNPT) | | | | | | | |
| | | | | | 18- 1.3- 13.0 GPM (1/2" FNPT) | | | | | | | |
| | | | | | 19- 5.0-30.0 GPM (3/4" FNPT) | | | | | | | |
| | | | | | 20- 10.0-60.0 GPM (1" FNPT) | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | 1- Voltage (0-10Vdc)+ | | | | | | |
| | | | | | | Relay O/P | | | | | | |
| | | | | | | 2-Current (4-20mA)+ | | | | | | |
| | | | | | | Relay O/P | | | | | | |
| | | | | | | 3- Pulse O/P | | | | | | |
| | | | | | | | - | | | | | |
| | | | | | | | | P- Polycarbonate | | | | |
| | | | | | | | | S- SS 316 | | | | |
| | | | | | | | | | V- FKM | | | |
| | | | | | | | | | K- FFKM | | _ | |
| | | | | | | | | | | P- PPS |] | |
| | | | | | | | | | | T-PTFE | | |
| | | | | | | | | | | | Z-Zirconium | 1 |
| | | | | | | | | | | | S- Sapphire | |
| | | | | | | | L | | | | | P- PPS |
| E) | xample: Pa | rt i | number f | for M-10000 wi | th SS316 Body, 1/4" FNPT connect M-10000-S2012-SVPZP | ion, 0.1-1 l/m range, C | urr | ent output, SS 31 | 6 windov | v, FKM O | -ring, PPS rot | or, |
| M - | 10000 | ıdí | s s | 2 2 | 01 | 2 | | S | V | Р | Z | P |
| TVI - | 10000 | | 3 | | 01 | | | 3 | V | P . | L | r |

Note:

- Pressure and temperature rating mentioned in the datasheet is for M-10000 with SS 316 body, SS 316 Window and PPS face plate
- For flow meter with 4-20mA output, 4mA will always be 0 flow and 20mA will be the maximum flow listed in the above table. Example for the flow meter with 0.1-1 L/M raange 4mA=0 L/M and 20mA = 1 L/M
- For flow meter with 0-10V output, 0V will always be 0 flow and 10V will be the maximum flow listed in the above table. Example for the flow meter with 0.1-1 L/M raange 0V=0 L/M and 10V = 1 L/M
- For the flow meter with Pulse output, the pulse rate corresponding to the flow will be printed on the label of the flow meter
- Please contact the factory for any special requirements.



PSG Malema 1060 S Rogers Circle Boca Raton, FL 33487 USA P: +1 (800) 637-6418 psgdover.com/malema



Where Innovation Flows

INSTMRT-DS-10000-32028001

Authorized PSG® Partner: Copyright 2023 PSG*, a Dover company