


## Welding adapter for process sensors

WELDING ADAPT D85 G1 V4A 3A

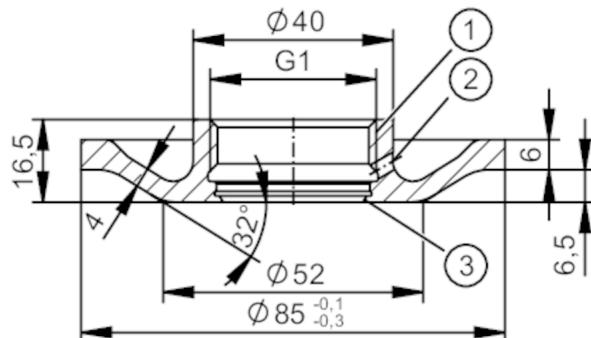

1 G1 internal thread Aseptoflex Vario  
 2 Leakage port  
 3 sealing area

 **3A** EC 1935/2004 EHEDG Certified 

## Application

Design	with leakage port
Installation	recommended for wall thickness <= 6 mm and for unfavourable welding conditions
Pressure rating	16 bar   5 MPa
Note on pressure rating	for the connection sensor - adapter

## Tests / approvals

Pressure Equipment Directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.
Safety instructions	The compatibility between medium and product material has to be checked in all applications.

## Mechanical data

Weight	[g]	289.7
Materials (wetted parts)		welding adapter: stainless steel (316L/1.4435) surface characteristics: Ra < 0,4 µm / Rz = 4 µm
Sensor connection		G 1 internal thread Aseptoflex Vario
Process connection		welding adapter Ø 85 mm
Sealing		Gasket

## Accessories

Items supplied	O-rings: 1 x (24 x 2 mm), EPDM, E30054
Accessories (optional)	O-ring: 1 x 24 x 2, FKM, FDA compliant, E30123 Welding mandrel, E30452 welding mandrel, water-cooled, E30532 leak test, E30530 grinding protection, E30162

## Remarks

Pack quantity	1 pcs.
---------------	--------